

Bianchi

2026
TECHNICAL BOOK

ROAD

P. 03

MTB

P. 61

GRAVEL

P. 63

E-BIKES

P. 83

CITY-FITNESS

P. 87



ROAD

RACING | ENDURANCE | CYCLOCROSS | TIME TRIAL/TRI


ROAD RACING AERO

OLTRE RC

OLTRE PRO

OLTRE COMP

THE IDEA

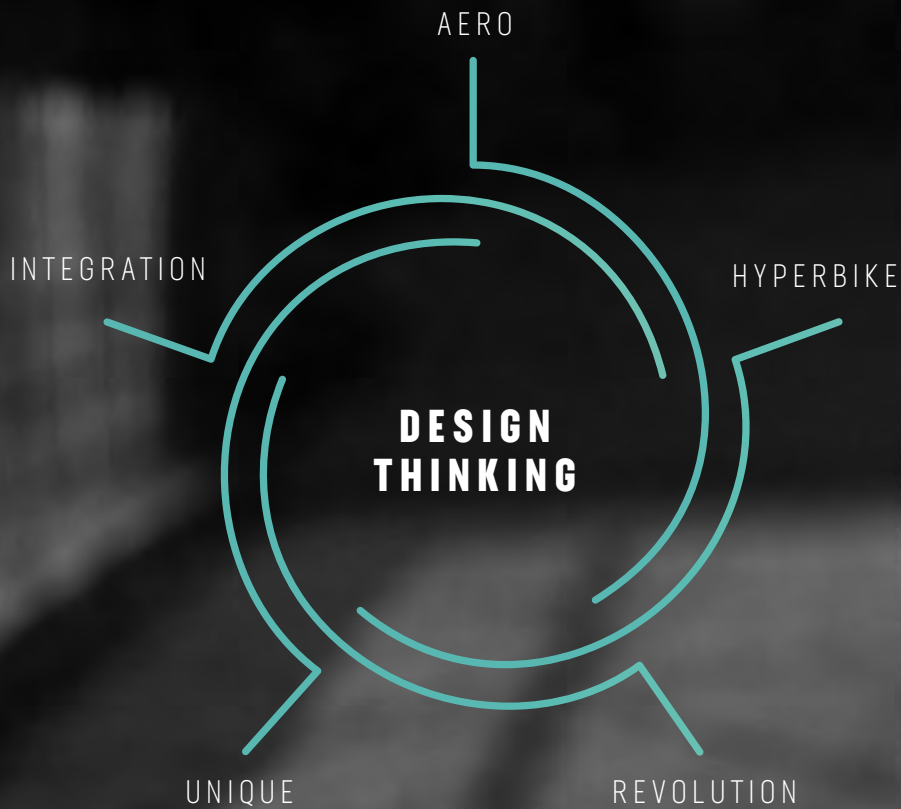

INTEGRATED SYSTEM

ATHLETE / BICYCLE



FRAME / COMPONENTS



MAXIMUM PERFORMANCE
OPTIMIZATION





NUMBERS THAT SPEAK

SAVING
-17.1 WATTS
AT 50KM/H

COMPARED TO
OLTRE XR4 AT 50 KM/H

-5.1% CDA*

CDA*: coefficient of aerodynamic
drag, which is the result of bike/
athlete's drag, shape and surface.


AIR DEFLECTOR

IMPROVE THE DIRECTION OF AIR FLOW.
OPTIMIZE THE AERODYNAMICS OF THE BIKE
AND ATHLETE.

PATENT PENDING.



OLTRE RC | OLTRE PRO | OLTRE COMP

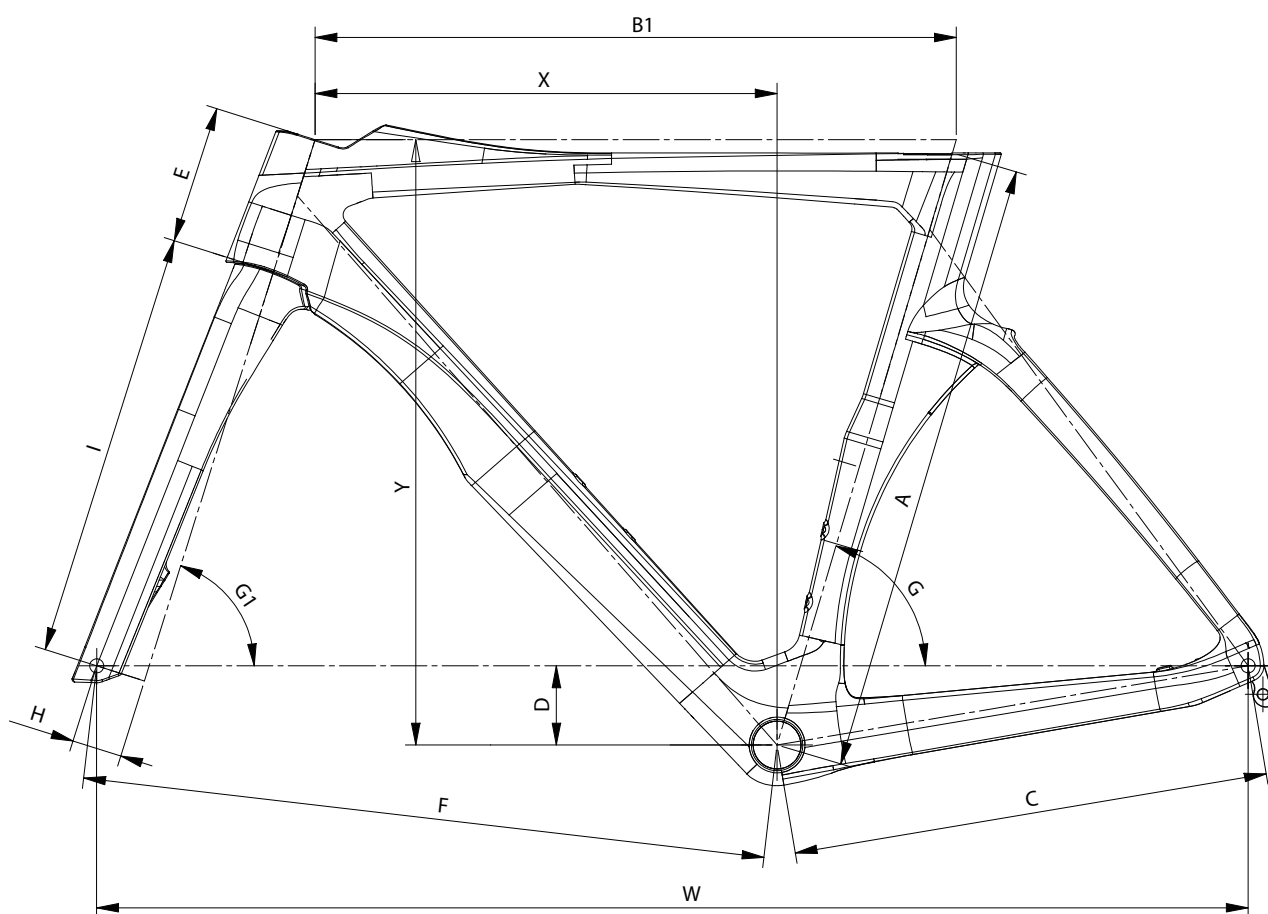

Oltre RC / Oltre PRO / Oltre COMP													
SIZE	A	B1	C	D	E	F	G	G1	H	I	X	Y	WB
470	450	515	410	58	83	579	74.5°	70.5°	43	368	385	470	982
500	480	525	410	58	88	581	74.5°	71.5°	43	368	392	478	983
530	510	536	410	68	103	582	74°	72°	43	368	393	504	984
550	530	550	410	68	118	588	73.5°	72.5°	43	368	397	520	988
570	550	560	412	68	133	593	73.5°	73°	43	368	402	536	996
590	570	575	412	68	153	603	73°	73°	43	368	406	555	1005

OLTRE RC | DURACE DI2 12SP | YUB21



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZW - Metallic Celeste/CK16 - full glossy
FRAME	Oltre RC carbon aero shape, electronic drivetrain only, headset 1.1/4-1.1/4, BB-PressFit 86,5x41mm, integrated seat clamp, for flat mount caliper, internal cable routing for disc brakes, thru axle 12x142mm sizes 47-50-53-55-57-59cm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa No. 54 - MR137 - ACB 1-1/4diam.46.9x diam.37x7 Fsa TH970R - MR082R - SL Alloy ACB 1-1/4diam.46.8x diam.34x7
FORK	Full Carbon aero, Disc brakes, integrated head 1.1/4, flat mount caliper, thru axle 12x100mm
SHIFTER	Shimano Durace Di2 hydraulic disc brake for road, ST-R9270, BR-R9270, for 160mm rotor
REAR DERAILLEUR	Shimano Durace Di2 12sp, RD-R9250
FRONT DERAILLEUR	Shimano Durace Di2 12sp, FD-R9250
CRANKSET	Shimano, Durace 12sp, FC-R9200, 4iiii precision 3+ dual side power meter, 52x36T, Crank Length: 170mm-47/54cm, 172.5mm-55/59cm
BOTTOM BRACKET	Shimano, SM-BB92-41B, press fit for road
CHAIN	Shimano Durace 12sp, CN-M9100
CASSETTE / FREEWHEEL	Shimano Durace 12sp, CS-R9200, 11-12-13-14-15-16-17-19-21-24-27-30T

BRAKE	Shimano BR-R9270 Hydraulic disc brake, included in the shifter
BRAKE LEVER	included
DISC ROTOR	Shimano CL900, centerlock type w/Ice Tech, 160mm front and rear
RIM/WHEELSET	Reparto Corse Carbon SPB 50mm profile, 700x21c (front), Reparto Corse Carbon SPB 65mm profile, 700x21c, HG11 body (rear), 3K and UD high strength carbon fiber, tubeless ready, weight per set: 1520 gr (+/-5%)
TIRE	Pirelli P ZERO™ Race SL TLR , 28-622, 120 tpi
STEM	Integrated handlebar Integrated Aero bar, material Carbon, drop 125mm, reach 80mm, Di2 compatible Ext: 90x400-47/50cm ; 100x420-53cm; 110x420-55/57cm; 120x440-59cm
HANDLEBAR	included in the stem
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/55cm, 350mm-57/59cm
SADDLE	Bianchi RC139 Carbon Air, weight 168g, Length: 250mm, Wide: 139mm, Rails: 7x9,3mm

OLTRE RC | DURACE DI2 12SP | YUB21



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZE - Metallic Celeste/CK16 - full glossy
FRAME	Oltre RC carbon aero shape, electronic drivetrain only, headset 1.1/4-1.1/4, BB-PressFit 86,5x41mm, integrated seat clamp, for flat mount caliper, internal cable routing for disc brakes, thru axle 12x142mm sizes 47-50-53-55-57-59cm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa No. 54 - MR137 - ACB 1-1/4diam.46.9x diam.37x7 Fsa TH970R - MR082R - SL Alloy ACB 1-1/4diam.46.8x diam.34x7
FORK	Full Carbon aero, Disc brakes, integrated head 1.1/4, flat mount caliper, thru axle 12x100mm
SHIFTER	Shimano Durace Di2 hydraulic disc brake for road, ST-R9270, BR-R9270, for 160mm rotor
REAR DERAILLEUR	Shimano Durace Di2 12sp, RD-R9250
FRONT DERAILLEUR	Shimano Durace Di2 12sp, FD-R9250
CRANKSET	Shimano, Durace 12sp, FC-R9200, 4iiii precision 3+ dual side power meter, 52x36T, Crank Length: 170mm-47/54cm, 172.5mm-55/59cm
BOTTOM BRACKET	Shimano, SM-BB92-41B, press fit for road
CHAIN	Shimano Durace 12sp, CN-M9100
CASSETTE / FREEWHEEL	Shimano Durace 12sp, CS-R9200, 11-12-13-14-15-16-17-19-21-24-27-30T

BRAKE	Shimano BR-R9270 Hydraulic disc brake, included in the shifter
BRAKE LEVER	included
DISC ROTOR	Shimano CL900, centerlock type w/Ice Tech, 160mm front and rear
RIM/WHEELSET	Reparto Corse Carbon SPB 50mm profile, 700x21c (front), Reparto Corse Carbon SPB 65mm profile, 700x21c, HG11 body (rear), 3K and UD high strength carbon fiber, tubeless ready, weight per set: 1520 gr (+/-5%)
TIRE	Pirelli P ZERO™ Race SL TLR , 28-622, 120 tpi
STEM	Integrated handlebar Integrated Aero bar, material Carbon, drop 125mm, reach 80mm, Di2 compatible Ext: 90x400-47/50cm ; 100x420-53cm; 110x420-55/57cm; 120x440-59cm
HANDLEBAR	included in the stem
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/55cm, 350mm-57/59cm
SADDLE	Bianchi RC139 Carbon Air, weight 168g, Length: 250mm, Wide: 139mm, Rails: 7x9,3mm

OLTRE RC | SRAM RED ETAP AXS 12SP | YUB20



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZE - Metallic Celeste/CK16 - full glossy ZW - Carbon UD/Metallic Celeste - full matt
FRAME	Oltre RC carbon aero shape, electronic drivetrain only, headset 1.1/4-1.1/4, BB-PressFit 86,5x41mm, integrated seat clamp, for flat mount caliper, internal cable routing for disc brakes, thru axle 12x142mm sizes 47-50-53-55-57-59cm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa No. 54 - MR137 - ACB 1-1/4diam.46.9x diam.37x7
FORK	Full Carbon aero, Disc brakes, integrated head 1.1/4, flat mount caliper, thru axle 12x100mm
SHIFTER	Sram Red eTap AXS E1 Hydraulic Disc Brake
REAR DERAILLEUR	Sram Red eTap AXS E1 12sp
FRONT DERAILLEUR	Sram Red eTap AXS E1
CRANKSET	Sram Red E1, 12sp, Quark power meter, 48/35, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm
BOTTOM BRACKET	Sram Press fit Road 86,5x41
CHAIN	Sram Red E1, 114 links
CASSETTE / FREEWHEEL	Sram Red XG 1290, E1, 10-33, 10-11-12-13-14-15-17-19-21-24-28-33T
BRAKE	Sram included in the shifter
DISC ROTOR	Sram Paceline X, centerlock, 160mm front and rear

RIM/WHEELSET	Reparto Corse Carbon SPB 50mm profile, 700x21c (front), Reparto Corse Carbon SPB 65mm profile, 700x21c, XDR body (rear), 3K and UD high strength carbon fiber, tubeless ready, weight per set: 1520 gr (+/-5%)
TIRE	Pirelli P ZERO™ Race SL TLR , 28-622, 120 tpi
STEM	Integrated handlebar Integrated Aero bar, material Carbon, drop 125mm, reach 80mm, Di2 compatible Ext: 90x400-47/50cm ; 100x420-53cm ; 110x420-55/57cm; 120x440-59cm
HANDLEBAR	included in the stem
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/55cm, 350mm-57/59cm
SADDLE	Bianchi RC139 Carbon Air, weight 168g, Length: 250mm, Wide: 139mm, Rails: 7x9,3mm

OLTRE RC | SRAM RED ETAP AXS 12SP | YUB20



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZE - Metallic Celeste/CK16 - full glossy ZW - Carbon UD/Metallic Celeste - full matt
FRAME	Oltre RC carbon aero shape, electronic drivetrain only, headset 1.1/4-1.1/4, BB-PressFit 86,5x41mm, integrated seat clamp, for flat mount caliper, internal cable routing for disc brakes, thru axle 12x142mm sizes 47-50-53-55-57-59cm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa No. 54 - MR137 - ACB 1-1/4diam.46.9x diam.37x7
FORK	Full Carbon aero, Disc brakes, integrated head 1.1/4, flat mount caliper, thru axle 12x100mm
SHIFTER	Sram Red eTap AXS E1 Hydraulic Disc Brake
REAR DERAILLEUR	Sram Red eTap AXS E1 12sp
FRONT DERAILLEUR	Sram Red eTap AXS E1
CRANKSET	Sram Red E1, 12sp, Quark power meter, 48/35, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm
BOTTOM BRACKET	Sram Press fit Road 86,5x41
CHAIN	Sram Red E1, 114 links
CASSETTE / FREEWHEEL	Sram Red XG 1290, E1, 10-33, 10-11-12-13-14-15-17-19-21-24-28-33T
BRAKE	Sram included in the shifter
DISC ROTOR	Sram Paceline X, centerlock, 160mm front and rear



RIM/WHEELSET	Reparto Corse Carbon SPB 50mm profile, 700x21c (front), Reparto Corse Carbon SPB 65mm profile, 700x21c, XDR body (rear), 3K and UD high strength carbon fiber, tubeless ready, weight per set: 1520 gr (+/-5%)
TIRE	Pirelli P ZERO™ Race SL TLR , 28-622, 120 tpi
STEM	Integrated handlebar Integrated Aero bar, material Carbon, drop 125mm, reach 80mm, Di2 compatible Ext: 90x400-47/50cm ; 100x420-53cm ; 110x420-55/57cm; 120x440-59cm
HANDLEBAR	included in the stem
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/55cm, 350mm-57/59cm
SADDLE	Bianchi RC139 Carbon Air, weight 168g, Length: 250mm, Wide: 139mm, Rails: 7x9,3mm

OLTRE RC | FRAMESET | XTB05



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	XR : Carbon/CK16 Moon; XA: Graphite Carbon/Blue Violet
FRAME	Oltre RC carbon aero shape, electronic drivetrain only, headset 1.1/4-1.1/4, BB-PressFit 86,5x41mm, integrated seat clamp, for flat mount caliper, internal cable routing for brakes, thru axle 12x142mm, compatible with 700x30 tire sizes 47-50-53-55-57-59cm
SEATPOST CLAMP	Included in the frame
HEADSET	Fsa No. 54 - MR137 - ACB 1-1/4 diam.46.9 x diam.37x7 Fsa TH970R - MR082R - SL Alloy ACB 1-1/4 diam.46.8 x diam.34x7
FORK	Full Carbon aero, brakes, integrated head 1.1/4, flat mount caliper, thru axle 12x100mm, compatible with 700x30 tire


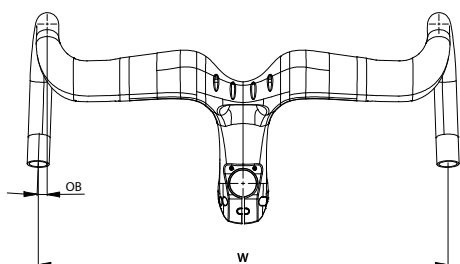


Oltre RC/PRO Integrated Handlebar										
Size	Width (W)	Lenght (L)	Reach (R)	Drop (D)	Stem/HB reach (SR)	Outward bend (OB)	X	Y	A	B
90x400	400	90	80,9	128,3	165,7	2°	72	71,5	143,6	164,5
90x420	420	90	80,9	128,3	165,7	2°	72	71,5	143,6	164,5
90x440	440	90	80,9	128,3	165,7	2°	72	71,5	143,6	164,5
100x400	400	100	79	129,7	173,6	2°	79,6	80,1	143,6	170,5
100x420	420	100	79	129,7	173,6	2°	79,6	80,1	143,6	170,5
100x440	440	100	79	129,7	173,6	2°	79,6	80,1	143,6	170,5
110x400	400	110	79	129,7	183,6	2°	90,1	80,1	143,6	181
110x420	420	110	79	129,7	183,6	2°	90,1	80,1	143,6	181
110x440	440	110	79	129,7	183,6	2°	90,1	80,1	143,6	181
120x400	400	120	79	129,7	193,6	2°	100,6	80,1	143,6	191,4
120x420	420	120	79	129,7	193,6	2°	100,6	80,1	143,6	191,4
120x440	440	120	79	129,7	193,6	2°	100,6	80,1	143,6	191,4
130x400	400	130	79	129,7	203,6	2°	111,1	80,1	143,6	202,1
130x420	420	130	79	129,7	203,6	2°	111,1	80,1	143,6	202,1
130x440	440	130	79	129,7	203,6	2°	111,1	80,1	143,6	202,1
140x400	400	140	79	129,7	213,6	2°	117,8	92	143,6	208,7
140x420	420	140	79	129,7	213,6	2°	117,8	92	143,6	208,7
140x440	440	140	79	129,7	213,6	2°	117,8	92	143,6	208,7

*Frame price does not include cockpit.

AERO COCKPIT

EXCLUSIVE BIANCHI DESIGN

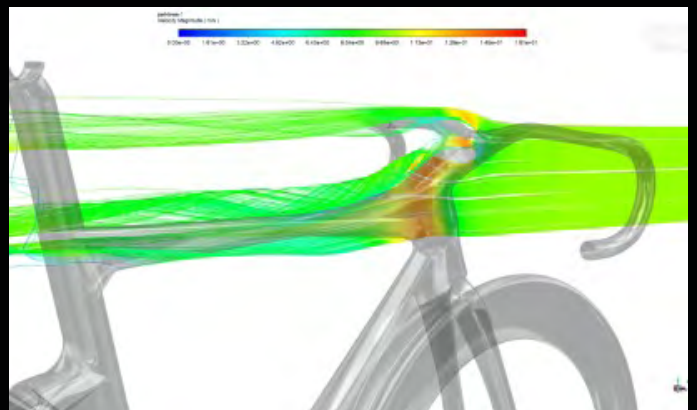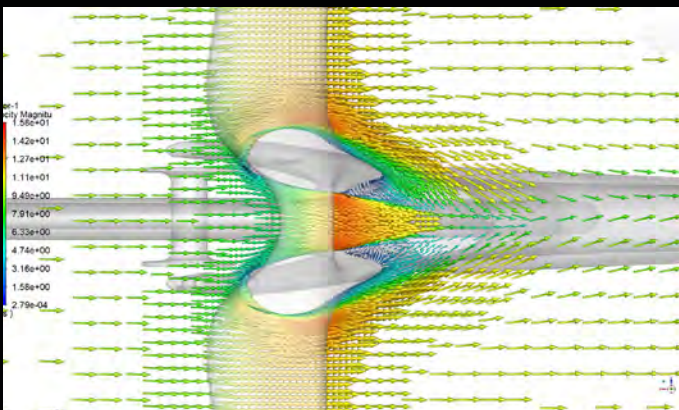

ADVANTAGES _REDUCED AERODYNAMIC DRAG THANKS TO HANDLEBAR AND TOP TUBE INTEGRATION.

OLTRE PRO | DURACE DI2 12SP | YTB07



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	XE - GRAPHITE MATTE/BLACK GLOSSY
FRAME	Oltre PRO carbon w/Bianchi CV System aero shape, electronic drivetrain only, headset 1.1/4-1.1/4,BB-PressFit 86,5x41mm, integrated seat clamp, for flat mount caliper, internal cable routing for disc brakes, thru axle 12x142mm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa No. 54 - MR137 - ACB 1-1/4diam.46.9x diam.37x7 Fsa TH970E - MR168 - Alloy ACB 1-1/4diam.46.8x diam.34x7
FORK	Full Carbon aero w/Bianchi CV System, Disc brakes, integrated head 1.1/4, flat mount caliper, thru axle 12x100mm
SHIFTER	Shimano Durace Di2 12sp
REAR DERAILEUR	Shimano Durace Di2 12sp
FRONT DERAILEUR	Shimano Durace Di2 12sp,
CRANKSET	Shimano Durace 12sp, CS-R9200, 11-12-13-14-15-16-17-19-21-24-27-30T
BOTTOM BRACKET	Shimano, SM-BB92-41B, press fit for road
CHAIN	Shimano 12sp

CASSETTE / FREEWHEEL	Shimano Durace 12sp, CS-R9200, 11-12-13-14-15-16-17-19-21-24-27-30T
BRAKE	Included in the shifter
DISC ROTOR	Shimano CL900, centerlock type w/Ice Tech, 160mm front and rear
RIM/WHEELSET	Velomann Plutonium , 50mm profile, 700x21c, 24h, XDR body
TIRE	Pirelli P ZERO™ Race SL TLR , 28-622, 120 tpi
STEM	Integrated handlebar Integrated Aero bar, material Carbon, drop 125mm, reach 80mm, Di2 compatible Ext: 90x400-47/50cm ; 100x420-53cm; 110x420-55/57cm; 120x440-59cm
HANDLEBAR	included in the stem
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/55cm, 350mm-57/59cm
SADDLE	Velomann Mitora139 Lite, open flow, carbon rails 7x9,3mm, carbon-reinforced nylon, Wide: 139mm, Length: 250mm

OLTRE PRO | DURACE DI2 12SP | YTB07



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	XJ - GRAPHITE/CELESTE FULL MATTE
FRAME	Oltre PRO carbon w/Bianchi CV System aero shape, electronic drivetrain only, headset 1.1/4-1.1/4, BB-PressFit 86,5x41mm, integrated seat clamp, for flat mount caliper, internal cable routing for disc brakes, thru axle 12x142mm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa No. 54 - MR137 - ACB 1-1/4diam.46.9x diam.37x7 Fsa TH970E - MR168 - Alloy ACB 1-1/4diam.46.8x diam.34x7
FORK	Full Carbon aero w/Bianchi CV System, Disc brakes, integrated head 1.1/4, flat mount caliper, thru axle 12x100mm
SHIFTER	Shimano Durace Di2 12sp
REAR DERAILEUR	Shimano Durace Di2 12sp
FRONT DERAILEUR	Shimano Durace Di2 12sp,
CRANKSET	Shimano Durace 12sp, CS-R9200, 11-12-13-14-15-16-17-19-21-24-27-30T
BOTTOM BRACKET	Shimano, SM-BB92-41B, press fit for road
CHAIN	Shimano 12sp

CASSETTE / FREEWHEEL	Shimano Durace 12sp, CS-R9200, 11-12-13-14-15-16-17-19-21-24-27-30T
BRAKE	Shimano included in the shifter
DISC ROTOR	Shimano CL900, centerlock type w/Ice Tech, 160mm front and rear
RIM/WHEELSET	Velomann Plutonium , 50mm profile, 700x21c, 24h, XDR body
TIRE	Pirelli P ZERO™ Race SL TLR , 28-622, 120 tpi
STEM	Integrated handlebar Integrated Aero bar, material Carbon, drop 125mm, reach 80mm, Di2 compatible Ext: 90x400-47/50cm ; 100x420-53cm; 110x420-55/57cm; 120x440-59cm
HANDLEBAR	included in the stem
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/55cm, 350mm-57/59cm
SADDLE	Velomann Mitora139 Lite, open flow, carbon rails 7x9,3mm, carbon-reinforced nylon, Wide: 139mm, Length: 250mm

OLTRE PRO | SRAM FORCE ETAP AXS | YUB27



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZF - Metallic Celeste/Graphite - full matte
FRAME	Oltre PRO carbon w/Bianchi CV System aero shape, electronic drivetrain only, headset 1.1/4-1.1/4, BB-PressFit 86,5x41mm, integrated seat clamp, for flat mount caliper, internal cable routing for disc brakes, thru axle 12x142mm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa No. 54 - MR137 - ACB 1-1/4diam.46.9x diam.37x7 Fsa TH970E - MR168 - Alloy ACB 1-1/4diam.46.8x diam.34x7
FORK	Full Carbon aero w/Bianchi CV System, Disc brakes, integrated head 1.1/4, flat mount caliper, thru axle 12x100mm
SHIFTER	Sram Force eTap AXS D2 Hydraulic Disc Brake
REAR DERAILEUR	Sram Force eTap AXS D2 12sp
FRONT DERAILEUR	Sram Force eTap AXS D2
CRANKSET	Sram Force D2, 12sp, Quark power meter, 48/35, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm
BOTTOM BRACKET	Sram Press fit Road 86,5x41
CHAIN	Sram Force D1 12sp

CASSETTE / FREEWHEEL	Sram Force XG-1270 D1, 12sp, 10-11-12-13-14-15-17-19-21-24-28-33T
BRAKE	Sram included in the shifter
DISC ROTOR	Sram Paceline X, centerlock, 160mm front and rear
RIM/WHEELSET	Velomann Plutonium , 50mm profile, 700x21c, 24h, XDR body
TIRE	Pirelli P ZERO™ Race SL TLR , 28-622, 120 tpi
STEM	Integrated handlebar Integrated Aero bar, material Carbon, drop 125mm, reach 80mm, Di2 compatible Ext: 90x400-47/50cm ; 100x420-53cm; 110x420-55/57cm; 120x440-59cm
HANDLEBAR	included in the stem
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/55cm, 350mm-57/59cm
SADDLE	Velomann Mitora139 Lite, open flow, carbon rails 7x9,3mm, carbon-reinforced nylon, Wide: 139mm, Length: 250mm

OLTRE PRO | SRAM FORCE ETAP AXS | YUB27



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZH - CARBON IRIDESCENT GLOSSY
FRAME	Oltre PRO carbon w/Bianchi CV System aero shape, electronic drivetrain only, headset 1.1/4-1.1/4, BB-PressFit 86,5x41mm, integrated seat clamp, for flat mount caliper, internal cable routing for disc brakes, thru axle 12x142mm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa No. 54 - MR137 - ACB 1-1/4diam.46.9x diam.37x7 Fsa TH970E - MR168 - Alloy ACB 1-1/4diam.46.8x diam.34x7
FORK	Full Carbon aero w/Bianchi CV System, Disc brakes, integrated head 1.1/4, flat mount caliper, thru axle 12x100mm
SHIFTER	Sram Force eTap AXS D2 Hydraulic Disc Brake
REAR DERAILEUR	Sram Force eTap AXS D2 12sp
FRONT DERAILEUR	Sram Force eTap AXS D2
CRANKSET	Sram Force D2, 12sp, Quark power meter, 48/35, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm
BOTTOM BRACKET	Sram Press fit Road 86,5x41
CHAIN	Sram Force D1 12sp

CASSETTE / FREEWHEEL	Sram Force XG-1270 D1, 12sp, 10-11-12-13-14-15-17-19-21-24-28-33T
BRAKE	Sram included in the shifter
DISC ROTOR	Sram Paceline X, centerlock, 160mm front and rear
RIM/WHEELSET	Velomann Plutonium , 50mm profile, 700x21c, 24h, XDR body
TIRE	Pirelli P ZERO™ Race SL TLR , 28-622, 120 tpi
STEM	Integrated handlebar Integrated Aero bar, material Carbon, drop 125mm, reach 80mm, Di2 compatible Ext: 90x400-47/50cm ; 100x420-53cm; 110x420-55/57cm; 120x440-59cm
HANDLEBAR	included in the stem
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/55cm, 350mm-57/59cm
SADDLE	Velomann Mitora139 Lite, open flow, carbon rails 7x9,3mm, carbon-reinforced nylon, Wide: 139mm, Length: 250mm

OLTRE PRO | ULTEGRA DI2 12SP | YUB28



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZF - Metallic Celeste/Graphite - full matte
FRAME	Oltre PRO carbon w/Bianchi CV System aero shape, electronic drivetrain only, headset 1.1/4-1.1/4, BB-PressFit 86,5x41mm, integrated seat clamp, for flat mount caliper, internal cable routing for disc brakes, thru axle 12x142mm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa No. 54 - MR137 - ACB 1-1/4diam.46.9x diam.37x7 Fsa TH970E - MR168 - Alloy ACB 1-1/4diam.46.8x diam.34x7
FORK	Full Carbon aero w/Bianchi CV System, Disc brakes, integrated head 1.1/4, flat mount caliper, thru axle 12x100mm
SHIFTER	Shimano Ultegra Di2 hydraulic disc brake for road, ST-R8170, BR-R8170, for 160mm rotor
REAR DERAILLEUR	Shimano Ultegra Di2 12sp, RD-R8150
FRONT DERAILLEUR	Shimano Ultegra Di2 12sp, FD-R8150
CRANKSET	Shimano, Ultegra 12sp, FC-R8100, 4iiii precision 3+ power meter, for rear 12- speed, 52x36T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm
BOTTOM BRACKET	Shimano, SM-BB72-41B, press fit for road, bearing, inner cover
CHAIN	Shimano, Ultegra 12 sp, CN-M8100
CASSETTE / FREEWHEEL	Shimano Ultegra, CS-R8100, 11-12-13-14-15-16-17-19-21-24-27-30T

BRAKE	Shimano BR-RB170 Hydraulic disc brake.
BRAKE LEVER	included
DISC ROTOR	Shimano CL900, centerlock type w/Ice Tech, 160mm front and rear
RIM/WHEELSET	Velomann Plutonium , 50mm profile, 700x21c, 24h, HG body
TIRE	Pirelli P ZERO™ Race SL TLR , 28-622, 120 tpi
STEM	Integrated handlebar Integrated Aero bar, material Carbon, drop 125mm, reach 80mm, Di2 compatible Ext: 90x400-47/50cm; 100x420-53cm; 110x420-55/57cm; 120x440-59cm
HANDLEBAR	included in the stem
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/55cm, 350mm-57/59cm
SADDLE	Velomann Mitora139 Lite, open flow, carbon rails 7x9,3mm, carbon-reinforced nylon, Wide: 139mm, Length: 250mm

OLTRE PRO | ULTEGRA DI2 12SP | YUB28



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZH - CARBON IRIDESCENT GLOSSY
FRAME	Oltre PRO carbon w/Bianchi CV System aero shape, electronic drivetrain only, headset 1.1/4-1.1/4, BB-PressFit 86,5x41mm, integrated seat clamp, for flat mount caliper, internal cable routing for disc brakes, thru axle 12x142mm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa No. 54 - MR137 - ACB 1-1/4diam.46.9x diam.37x7 Fsa TH970E - MR168 - Alloy ACB 1-1/4diam.46.8x diam.34x7
FORK	Full Carbon aero w/Bianchi CV System, Disc brakes, integrated head 1.1/4, flat mount caliper, thru axle 12x100mm
SHIFTER	Shimano Ultegra Di2 hydraulic disc brake for road, ST-R8170, BR-R8170, for 160mm rotor
REAR DERAILLEUR	Shimano Ultegra Di2 12sp, RD-R8150
FRONT DERAILLEUR	Shimano Ultegra Di2 12sp, FD-R8150
CRANKSET	Shimano, Ultegra 12sp, FC-R8100, 4iiii precision 3+ power meter, for rear 12- speed, 52x36T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm
BOTTOM BRACKET	Shimano, SM-BB72-41B, press fit for road, bearing, inner cover
CHAIN	Shimano, Ultegra 12 sp, CN-M8100
CASSETTE / FREEWHEEL	Shimano Ultegra, CS-R8100, 11-12-13-14-15-16-17-19-21-24-27-30T

BRAKE	Shimano BR-RB170 Hydraulic disc brake.
BRAKE LEVER	included
DISC ROTOR	Shimano CL900, centerlock type w/Ice Tech, 160mm front and rear
RIM/WHEELSET	Velomann Plutonium , 50mm profile, 700x21c, 24h, HG body
TIRE	Pirelli P ZERO™ Race SL TLR , 28-622, 120 tpi
STEM	Integrated handlebar Integrated Aero bar, material Carbon, drop 125mm, reach 80mm, Di2 compatible Ext: 90x400-47/50cm; 100x420-53cm; 110x420-55/57cm; 120x440-59cm
HANDLEBAR	included in the stem
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/55cm, 350mm-57/59cm
SADDLE	Velomann Mitora139 Lite, open flow, carbon rails 7x9,3mm, carbon-reinforced nylon, Wide: 139mm, Length: 250mm

OLTRE COMP | ULTEGRA DI2 12SP | YTB23



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZN - Metallic Celeste/Black - full glossy ZP - Blue-Grey//Off White- full matt
FRAME	Oltre Comp, carbon, disc brakes, electronic and mechanical shifting compatible, internal cable routing 1.5-1.5 headset, BB-PressFit 86,5x41, flat mount brakes, thru axle 12x142mm sizes 47-50-53-55-57-59cm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa TH-073E ACB 1.5 51.8x40x8
FORK	Full Carbon aero, disc brakes, integrated head 1.5, thru axle 12x100mm, compatible with 700x30 tire
SHIFTER	Shimano Ultegra Di2 hydraulic disc brake for road, ST-R8170, BR-R8170, for 160mm rotor
REAR DERAILLEUR	Shimano Ultegra Di2 12sp, RD-R8150
FRONT DERAILLEUR	Shimano Ultegra Di2 12sp, FD-R8150
CRANKSET	Shimano, Ultegra 12sp, FC-R8100, for rear 12- speed, 52x36T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm
BOTTOM BRACKET	Shimano, SM-BB72-41B, press fit for road, bearing, inner cover
CHAIN	Shimano, Ultegra 12 sp, CN-M8100
CASSETTE / FREEWHEEL	Shimano Ultegra, CS-R8100, 11-12-13-14-15-16-17-19-21-24-27-30T
BRAKE	Shimano BR-R8170 Hydraulic disc brake, included in the shifter

BRAKE LEVER	included
DISC ROTOR	Shimano center lock type w/Ice Tech, 160mm front rear
RIM/WHEELSET	Velomann Plutonium , 50mm profile, 700x21c, 24h, HG body
TIRE	Vittoria Rubino V 28-622 TLR full black G2.0, graphene + silica, 100TPI,
STEM	Velomann Aero stem, material alloy, Oversize, 1.1/8, size: 90mm-47/50cm, 100mm-53cm, 110mm-55/57cm, 120mm-59cm
HANDLEBAR	Velomann Aero Compact handlebar, alloy diam. 31,8mm, reach 74mm, drop 116mm, for fully internal cable routing Size: 400mm-47~53cm, 420mm-55~59cm
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm50/55cm, 350mm-57/59cm
SADDLE	Velomann Mitoral39, open flow, AISI rails 7x7mm, carbon-reinforced nylon, Wide: 139mm, Lenght: 250mm

OLTRE COMP | 105 Di2 12SP | YTB26



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZN - Metallic Celeste/Black - full glossy ZP - Velvet Navy/Off White- full matt
FRAME	Oltre Comp, carbon, disc brakes, electronic and mechanical shifting compatible, internal cable routing 1.5-1.5 headset, BB-PressFit 86,5x41, flat mount brakes, thru axle 12x142mm sizes 47-50-53-55-57-59cm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa TH-073E ACB 1.5 51.8x40x8
FORK	Full Carbon aero, disc brakes, integrated head 1.5, thru axle 12x100mm, compatible with 700x30 tire
SHIFTER	Shimano 105 Di2 hydraulic disc brake for road, ST-R7170, BR-R7170, for 160mm rotor
REAR DERAILLEUR	Shimano, 105 Di2 RD-R7150, 12-speed
FRONT DERAILLEUR	Shimano 105 Di2, FD-R7150 12-speed
CRANKSET	Shimano 105 12sp, FC-R7100, Ultegra hollowtech 2, for rear 12- speed, 50x34T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm
BOTTOM BRACKET	Shimano, SM-BB72-41B, press fit for road, bearing, inner cover
CHAIN	Shimano, 105 12sp, CN-M7100
CASSETTE / FREEWHEEL	Shimano, 105 12sp, CS-R7100, 11-12-13-14-15-17-19-21-24-27-30-34T
BRAKE	Shimano BR-R8170 Hydraulic disc brake, included in the shifter

BRAKE LEVER	included
DISC ROTOR	Shimano RT70 rotor for disc brake center lock, 160mm front and rear
RIM/WHEELSET	Velomann Plutonium , 50mm profile, 700x21c, 24h, HG body
TIRE	Vittoria Rubino V 28-622 TLR full black G2.0, graphene + silica, 100TPI,
STEM	Velomann Aero stem, material alloy, Oversize, 1.1/8, size: 90mm-47/50cm, 100mm-53cm, 110mm-55/57cm, 120mm-59cm
HANDLEBAR	Velomann Aero Compact handlebar, alloy diam. 31,8mm, reach 74mm, drop 116mm, for fully internal cable routing Size: 400mm-47~53cm, 420mm-55~59cm
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm50/55cm, 350mm-57/59cm
SADDLE	Velomann Mitora139, open flow, AISI rails 7x7mm, carbon-reinforced nylon, Wide: 139mm, Length: 250mm

OLTRE COMP | ULTEGRA DI2 12SP | YTB23



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZN - Metallic Celeste/Black - full glossy ZP - Blue-Grey//Off White- full matt
FRAME	Oltre Comp, carbon, disc brakes, electronic and mechanical shifting compatible, internal cable routing 1.5-1.5 headset, BB-PressFit 86,5x41, flat mount brakes, thru axle 12x142mm sizes 47-50-53-55-57-59cm
SEATPOST CLAMP	included in the frame
HEADSET	Fsa TH-073E ACB 1.5 51.8x40x8
FORK	Full Carbon aero, disc brakes, integrated head 1.5, thru axle 12x100mm, compatible with 700x30 tire
SHIFTER	Shimano Ultegra Di2 hydraulic disc brake for road, ST-R8170, BR-R8170, for 160mm rotor
REAR DERAILLEUR	Shimano Ultegra Di2 12sp, RD-R8150
FRONT DERAILLEUR	Shimano Ultegra Di2 12sp, FD-R8150
CRANKSET	Shimano, Ultegra 12sp, FC-R8100, for rear 12- speed, 52x36T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm
BOTTOM BRACKET	Shimano, SM-BB72-41B, press fit for road, bearing, inner cover
CHAIN	Shimano, Ultegra 12 sp, CN-M8100
CASSETTE / FREEWHEEL	Shimano Ultegra, CS-R8100, 11-12-13-14-15-16-17-19-21-24-27-30T
BRAKE	Shimano BR-R8170 Hydraulic disc brake, included in the shifter

BRAKE LEVER	included
DISC ROTOR	Shimano center lock type w/Ice Tech, 160mm front rear
RIM/WHEELSET	Velomann Plutonium , 50mm profile, 700x21c, 24h, HG body
TIRE	Vittoria Rubino V 28-622 TLR full black G2.0, graphene + silica, 100TPI,
STEM	Velomann Aero stem, material alloy, Oversize, 1.1/8, size: 90mm-47/50cm, 100mm-53cm, 110mm-55/57cm, 120mm-59cm
HANDLEBAR	Velomann Aero Compact handlebar, alloy diam. 31,8mm, reach 74mm, drop 116mm, for fully internal cable routing Size: 400mm-47~53cm, 420mm-55~59cm
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Oltre Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm50/55cm, 350mm-57/59cm
SADDLE	Velomann Mitoral39, open flow, AISI rails 7x7mm, carbon-reinforced nylon, Wide: 139mm, Lenght: 250mm

ROAD RACING ALL ROUNDER

SPECIALISSIMA RC

SPECIALISSIMA PRO

SPECIALISSIMA COMP

SPRINT

SPECIALISSIMA

RC





THE IDEA

CREATE
THE NEXT GENERATION
ALL-ROUNDER,
WITHOUT
COMPROMISE.

LIGHTWEIGHT


REACTIVITY

AERO

DESIGN
THINKING

HANDLING

INTEGRATION

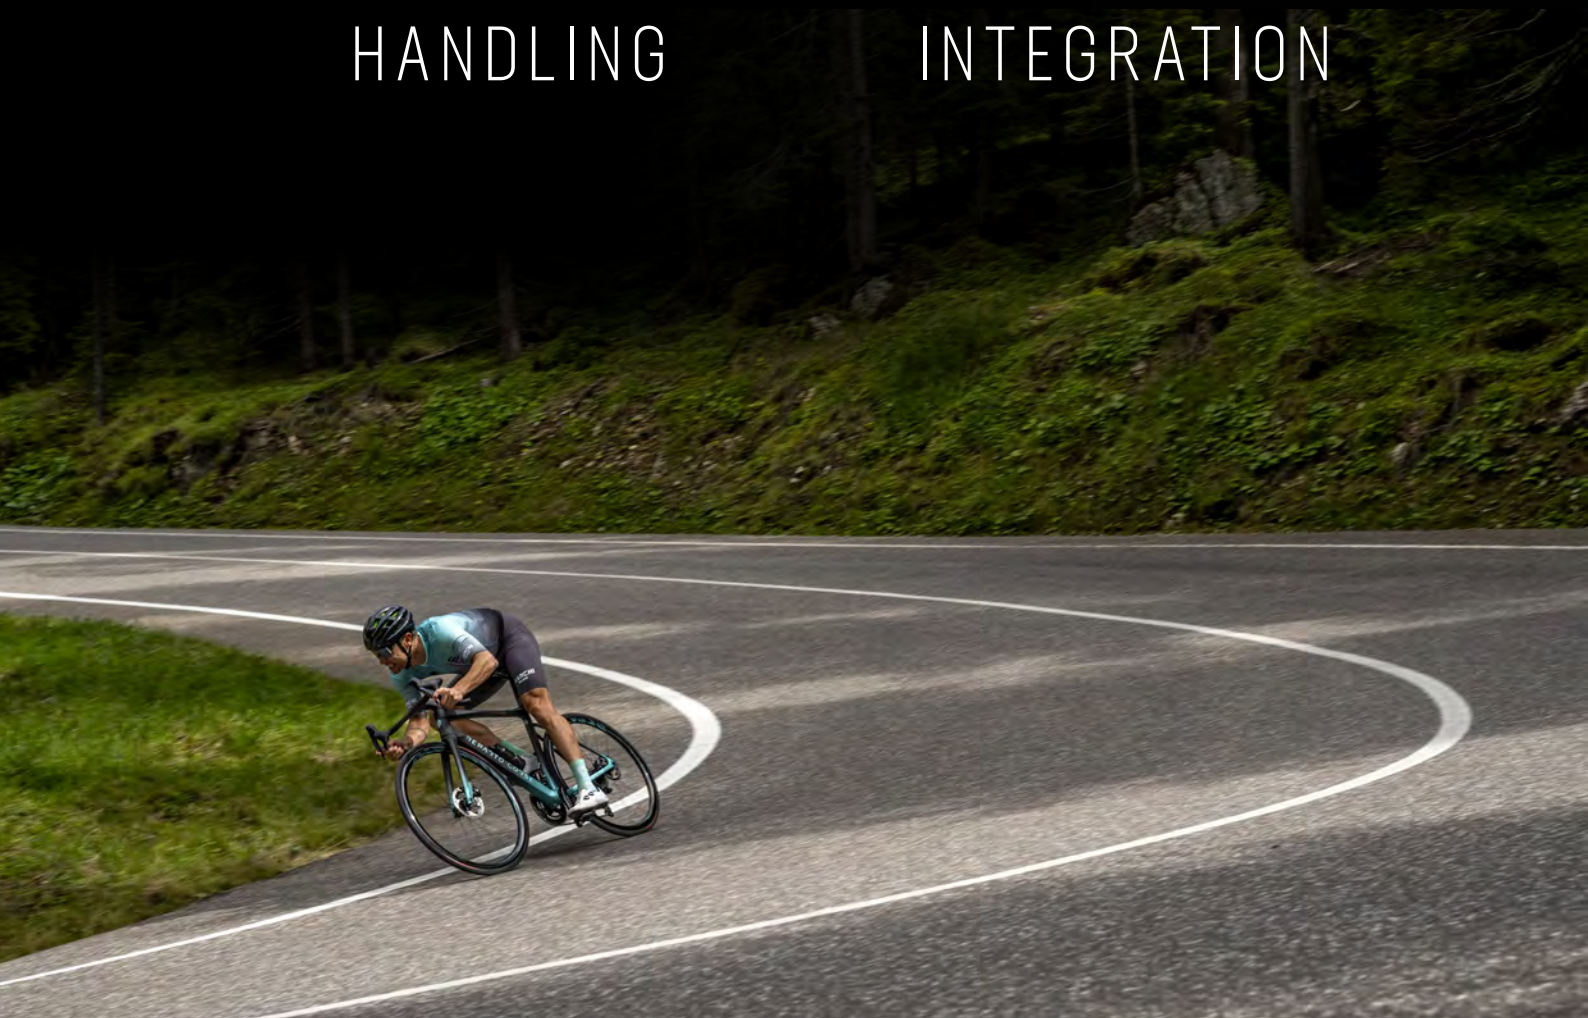

WHY CAN'T
LIGHT BE
AERO?



BIANCHI
SPECIALISSIMA RC
REPARTO CORSE

This was the question that prompted Reparto Corse to re-design the Specialissima. The answer was a bike with increased aero efficiency at lower gradient inclines, combined with excellent reactivity and a lower overall weight.

The next-gen Specialissima says no to compromise, giving you the very best tool for mountains and steep gradients. The Specialissima is impressively light at just 6.6kg for the entire bike, and with world-class stiffness-to-weight, it climbs with venom. The aero-optimised frame and proprietary componentry ensure you can also excel on the flat roads and technical descents that come before and after the climb.

6.60 KG *

FOR THE
ENTIRE
BIKE



This bike gives elite professional riders more tools in their repertoire, more options for attacking the parcours, an extra weapon in their competitive arsenal. In fact, it turns the whole concept of 'allrounder' on its head.



*SIZE 55, +/- 5%

PUSHING THRESHOLD



In response to our WorldTour athletes' feedback, we wanted to make the Specialissima a more efficient performer in the mountains. That meant upping the aero performance while preserving world-class stiffness-to-weight, so that at lower gradient inclines it could still provide a competitive advantage.

It took precision engineering to get here. Our racing division, Reparto Corse, set out to shift the tipping point of climbing gradient and power output at which the Specialissima could outperform an aero bike.


We call this tipping point where one bike becomes the better choice over the other, the Threshold.

Where the previous generation Specialissima did not become a more efficient choice for pro riders until the gradients hit 8.8%, Reparto Corse has successfully pushed the Threshold down to 6.2%.

RIDER LEVEL: PRO, UCI WORLD TOUR

420 WATTS OR 6 W/KG


10 KM COURSE

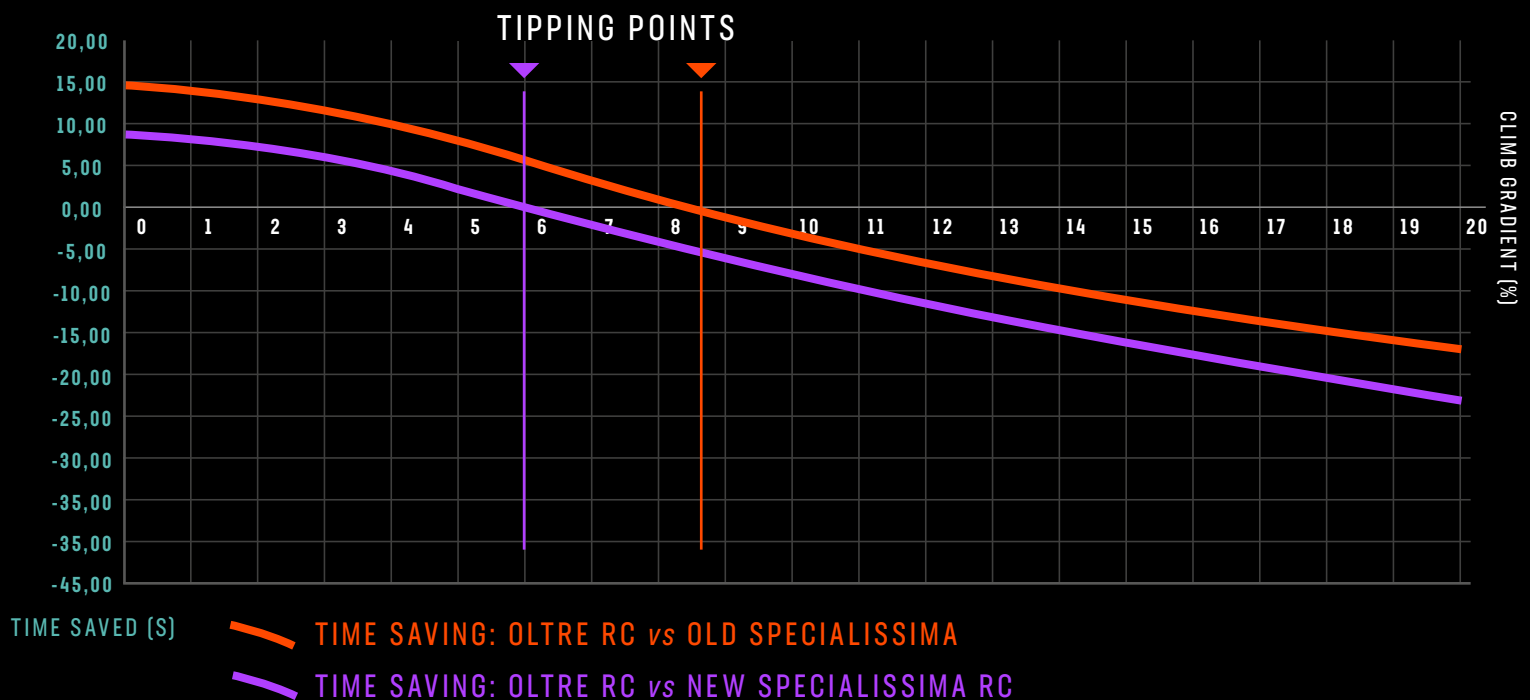

RIDER LEVEL: HIGH AMATEUR

300 WATTS OR 4.3 W/KG


10 KM COURSE

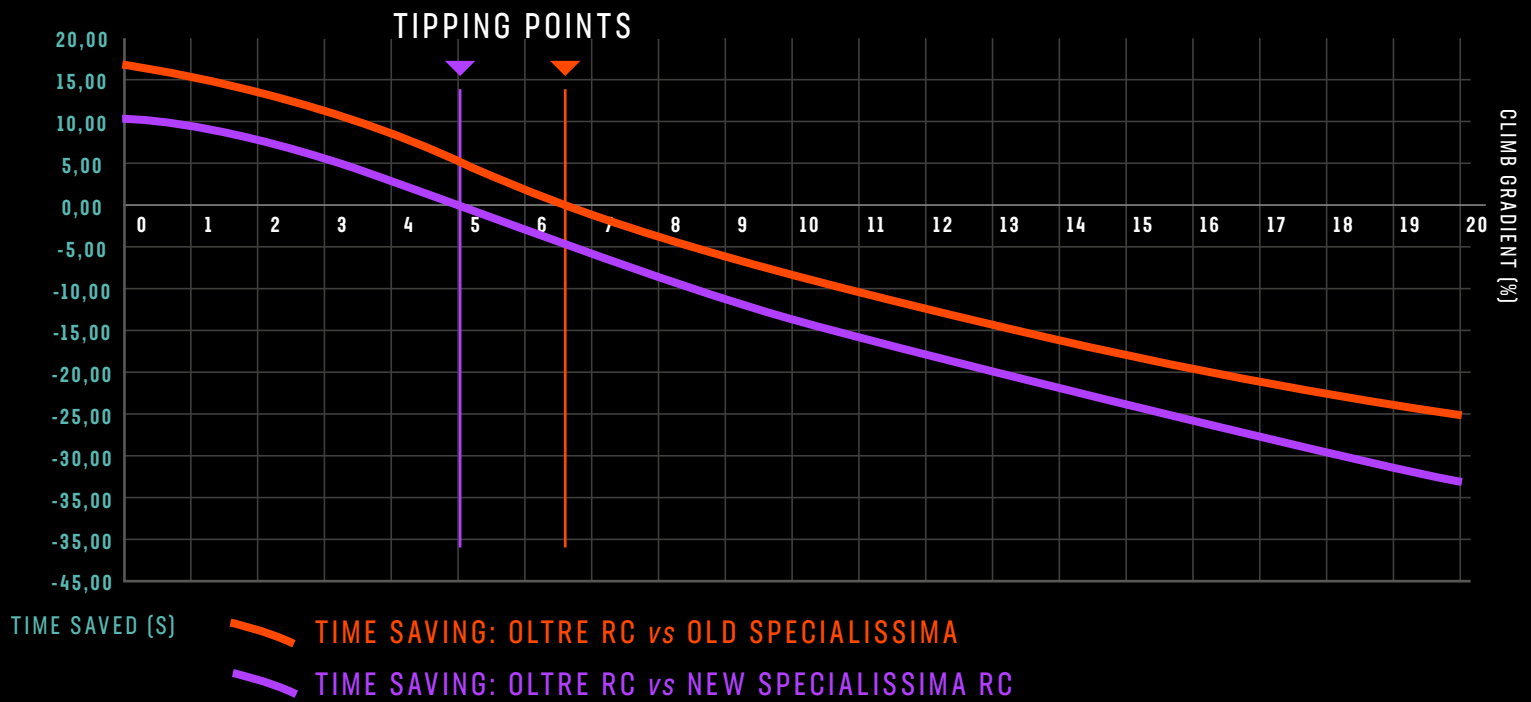


RIDER LEVEL: MEDIUM AMATEUR

250 WATTS OR 3.6 W/KG

10 KM COURSE

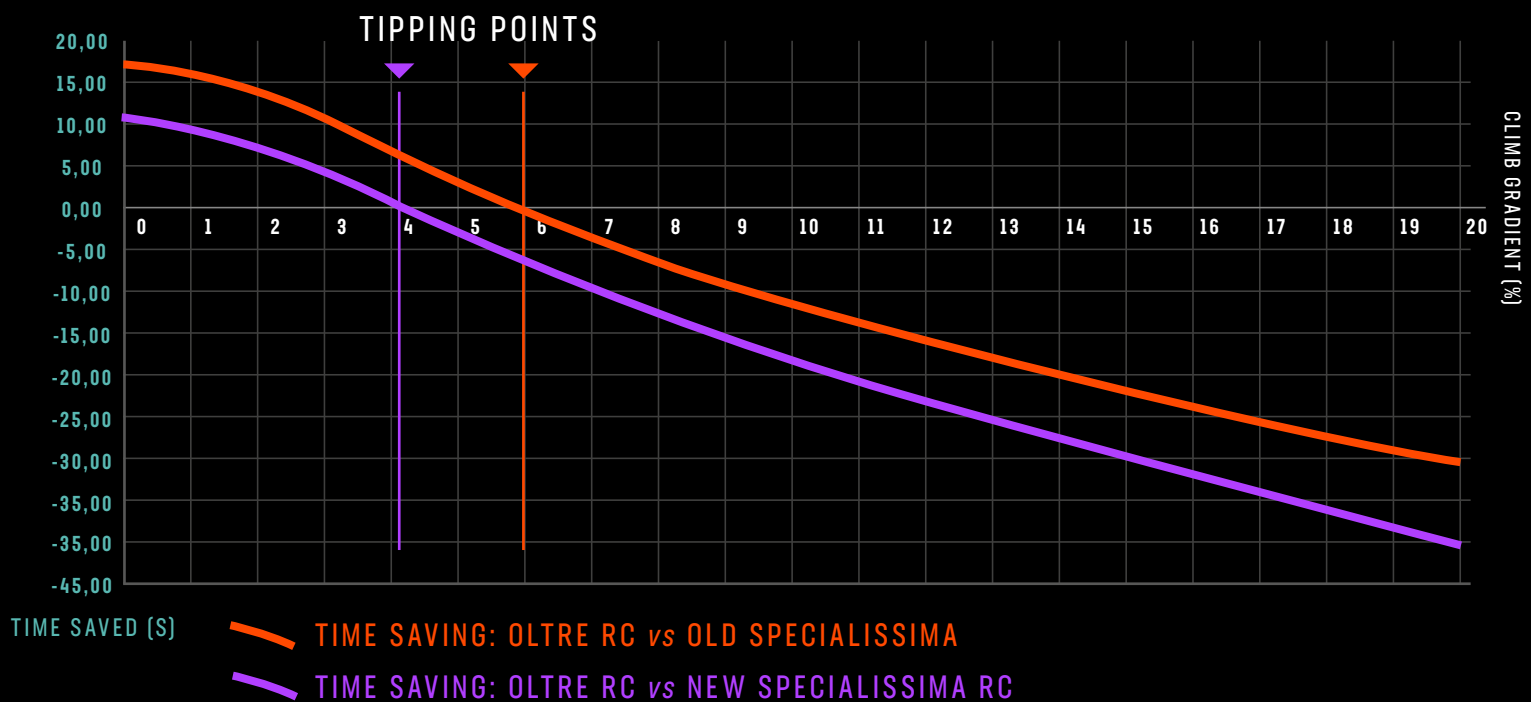

SPECIALISSIMA RC | SPECIALISSIMA PRO | SPECIALISSIMA COMP

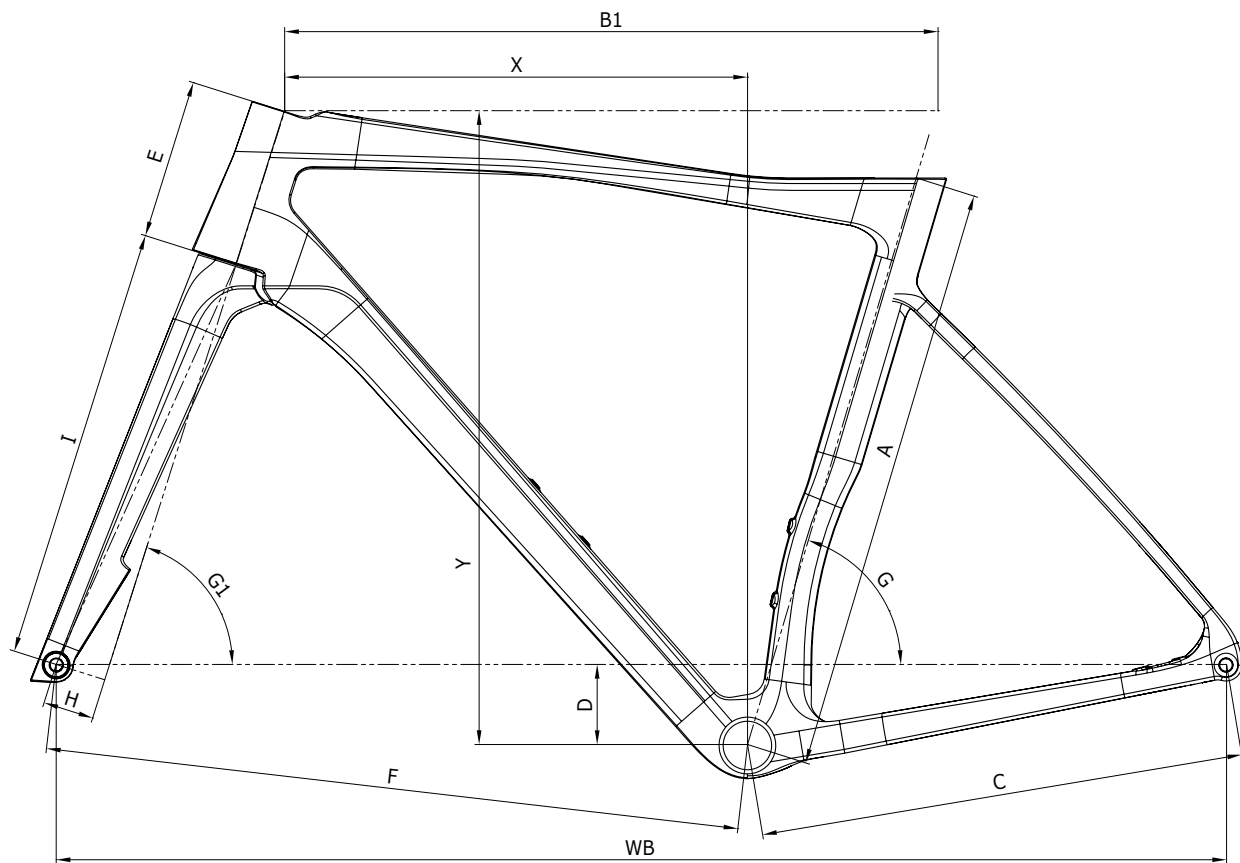

Specialissima RC / Specialissima PRO / Specialissima COMP													
SIZE	A	B1	C	D	E	F	G	G1	H	I	X	Y	WB
470	420	514	410	58	100	579	74.5°	70.5°	43	368	379	486	982
500	450	524	410	58	105	581	74.5°	71.5°	43	368	387	494	983
530	480	535	410	68	120	582	74°	72°	43	368	386	520	984
550	500	550	410	68	135	588	73.5°	72.5°	43	368	391	536	988
570	520	560	412	68	150	593	73.5°	73°	43	368	397	552	996
590	540	575	412	68	170	603	73°	73°	43	368	400	571	1005

SPECIALISSIMA RC | SRAM RED ETAP AXS 12SP | YUB42



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	MR - Carbon/CK Metallic/CK16
FRAME	Specialissima RC carbon HM, only electronic groupsets, fully internal cable routing, headset Acros ICR, direct mount brakes, BB-PressFit 86,5x41 sizes 47-50-53-55-57-59cm
HEADSET	Acros IS52 ICR SSbearings: custom headtube cover Specialissima 35mm spacers
FORK	Specialissima RC full Carbon HM aero, integrated head, disc, 1.5 head, 12x100mm thru axle
SHIFTER	Sram Red eTap AXS D1 12sp Hydraulic Disc Brake, 20mm Flat Mount
REAR DERAILLEUR	Sram Red eTap AXS D1 12sp
FRONT DERAILLEUR	Sram Red eTap AXS D1 braze on
CRANKSET	Sram Red D1 12sp Power Meter double, 48/35T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm
BOTTOM BRACKET	Sram Press fit Road 86,5x41
CHAIN	Sram Red D1 12sp

CASSETTE / FREEWHEEL	Sram Red XG-1290 D1 12sp, 10-11-12-13-14-15-16-17-19-21-24-28T
BRAKE	Included in the shifter
DISC ROTOR	Sram Rotor centerlock centerline x Road 160mm Rotor centerlock centerline x Road 140mm
RIM/WHEELSET	Reparto Corse 33R Ceramitech 33mm profile, 700x21c, 24h, XDR
TIRE	Pirelli P ZERO™ Race TT , 26-622, 127TPI
STEM	Reparto Corse integrated handlebar, material Carbon, for Acros ICR system drop 125mm, reach 80mm Ext: 90/380 (47-50cm) ; 100/400 (53cm) ; 110/400 (55-57cm); 120/420 (59cm)
HANDLEBAR	included in the stem
GRIP / TAPE	Velo Black soft Microfiber tapes
SEATPOST	Specialissima Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/53cm, 350mm-55/59cm
SADDLE	Reparto Corse Rc139Carbon, full carbon, open flow, Large 139mm Length 250mm

SPECIALISSIMA RC | DURA-ACE DI2 12SP | YUB40



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	MR - Carbon/CK16 Metallic/CK16
FRAME	Specialissima RC carbon HM, only electronic groupsets, fully internal cable routing, headset Acros ICR, direct mount brakes, BB-PressFit 86,5x41 sizes 47-50-53-55-57-59cm
HEADSET	Acros IS52 ICR SSbearings: custom headtube cover Specialissima
FORK	Specialissima RC full Carbon HM aero, integrated head, disc, 1.5 head, 12x100mm thru axle
SHIFTER	Shimano Dura-Ace Di2, ST-R9270(L), BR R9270(F)
REAR DERAILLEUR	Shimano, FD-R9250, Dura-Ace Di2
FRONT DERAILLEUR	Shimano, FD-R9250, Dura-Ace Di2
CRANKSET	Shimano, Dura-Ace 12sp, FC-R9200, 4iiii precision 3 + dual side power meter, 52x36T, Crank Length: 170mm-47/54cm, 172.5mm-55/59cm
BOTTOM BRACKET	Shimano SM-BB92-41B, press fit type for road
CHAIN	Shimano Durace, CN-M9100, 12sp
CASSETTE / FREEWHEEL	Shimano, CS-R9200 DURA-ACE 12sp, 11-12-13-14-15-16-17-19-21-24-27-30T


BRAKE	Shimano BR-R9270 Hydraulic disc brake included in the shifter
BRAKE LEVER	Included
DISC ROTOR	Shimano RT-CL900 center lock type w/Ice Tech, 160mm front, 140mm rear
RIM/WHEELSET	Reparto Corse 33R Ceramitech 33mm profile, 700x21c, 24h, HG11
TIRE	Pirelli P ZERO™ Race TLR RS, 28-622, 120TPI
STEM	Reparto Corse integrated handlebar, material Carbon, for Acros ICR system drop 125mm, reach 80mm Ext: 90/380 (47-50cm); 100/400 (53cm); 110/400 (55-57cm); 120/420 (59cm)
HANDLEBAR	Included in the stem
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Specialissima Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/53cm, 350mm-55/59cm
SADDLE	Reparto Corse Rc139Carbon, full carbon, open flow, Large 139mm Length 250mm

SPECIALISSIMA RC | FRAMEKIT | XTB07



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	MR - Carbon/CK16 Metallic/CK16
FRAME	Specialissima RC carbon HM, only electronic groupsets, fully internal cable routing, headset Acros ICR, direct mount brakes, BB-PressFit 86,5x41; sizes 47-50-53-55-57-59cm
HEADSET	Acros IS52 ICR SS bearings
FORK	Specialissima RC full Carbon HM aero, integrated head, disc, 1.5" head, 12x100mm thru axle
SEATPOST	Specialissima Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/53cm, 350mm-55/59cm

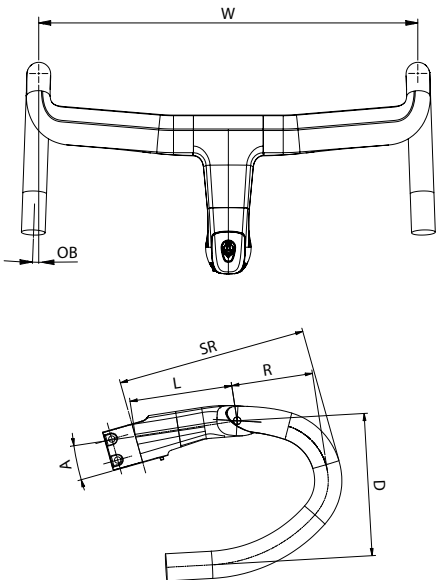

Specialissima RC/PRO Integrated Handlebar (C2306194)							
Size	Width (W)	Lenght (L)	Reach (R)	Drop (D)	Stem/HB reach (SR)	Outward bend (OB)	Angle (A)
90x380	380	90	72,6	124,8	167	2°	-7°
90x400	400	90	72,6	124,8	167	2°	-7°
90x420	420	90	72,6	124,8	167	2°	-7°
100x380	380	100	72,6	124,8	177	2°	-7°
100x400	400	100	72,6	124,8	177	2°	-7°
100x420	420	100	72,6	124,8	177	2°	-7°
110x380	380	110	72,6	124,8	187	2°	-7°
110x400	400	110	72,6	124,8	187	2°	-7°
110x420	420	110	72,6	124,8	187	2°	-7°
120x380	380	120	72,6	124,8	197	2°	-7°
120x400	400	120	72,6	124,8	197	2°	-7°
120x420	420	120	72,6	124,8	197	2°	-7°
120x440	440	120	72,6	124,8	197	2°	-7°
130x380	380	130	72,6	124,8	207	2°	-7°
130x400	400	130	72,6	124,8	207	2°	-7°
130x420	420	130	72,6	124,8	207	2°	-7°
130x440	440	130	72,6	124,8	207	2°	-7°

*Frame price does not include cockpit.

Crucial to its new and improved aero performance is the Specialissima's integrated handlebar. Available in five lengths and with a full carbon construction, it weighs just 330g for the 110mm x 380mm option. It's compatible with Acros internal cable routing and offers a 73mm reach with 125mm drop and a 2° flare.

To ensure that more riders can experience the epic performance of the Specialissima RC handlebar, our engineers have ensured it is fully cross-compatible with the Pro and Comp models, should owners wish to upgrade after purchase.

COCKPIT

COMPATIBLE
WITH ACROS ICR
internal
cable
routing

FROM 90 TO 130MM
AND FROM 380 TO 440MM
(C-C) IN WIDTH

FULL CARBON
330G OF WEIGHT
110x38

REACH 73MM DROP
125MM
2° FLARE ANGLE

2-BOLT COMPUTER
MOUNT COMPATIBLE



SPECIALISSIMA PRO | SRAM FORCE ETAP AXS | YTB43



COLOR	MW - Carbon/Ck Metallic/CK16 MV - Carbon/Graphite Irid/Black
FRAME	Specialissima PRO carbon HM with Bianchi CV System, only electronic groupsets, fully internal cable routing, headset Acros ICR, direct mount brakes, BB-PressFit 86,5x41 sizes 47-50-53-55-57-59cm
HEADSET	Acros IS52 ICR SS custom headtube cover Specialissima
FORK	Specialissima PRO full Carbon HM with CV, aero, integrated head, disc, 1.5 head, 12x100mm thru axle
SHIFTER	Sram Force eTap AXS D2 Hydraulic Disc Brake, 20mm Flat Mount
REAR DERAILLEUR	Sram Force eTap AXS D2 12sp
FRONT DERAILLEUR	Sram Force eTap AXS D2 braze on
CRANKSET	Sram Force D2 12sp, 48/35T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm, 175mm-61cm
BOTTOM BRACKET	Sram Press fit Road 86,5x41
CHAIN	Sram Force D1 12sp

CASSETTE / FREEWHEEL	Sram Force XG-1270 D1 12sp, 10-11-12-13-14-15-17-19-21-24-28-33T
BRAKE	Included in the shifter
DISC ROTOR	Sram Rotor centerlock paceline x Road 160mm
RIM/WHEELSET	Velomann Palladium , 33mm profile, 700x21c, 24h, XDR body
TIRE	Pirelli P ZERO™ Race , 26-622, 127TPI
STEM	Reparto Corse integrated handlebar, material Carbon, for Acros ICR system drop 125mm, reach 80mm Ext: 90/380 (47-50cm) ; 100/400 (53cm) ; 110/400 (55-57cm); 120/420 (59cm)
HANDLEBAR	Included in the stem
GRIP / TAPE	Velo Black soft Microfiber tapes
SEATPOST	Specialissima Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/53cm, 350mm-55/59cm
SADDLE	Velomann Mitoral39 Hyper, open flow, carbon rails, carbon-reinforced nylon Large 139mm Length 250mm

SPECIALISSIMA PRO | SRAM FORCE ETAP AXS | YTB43



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	MW - Carbon/Ck Metallic/CK16 MV - Carbon/Graphite Irid/Black	CASSETTE / FREEWHEEL	Sram Force XG-1270 D1 12sp, 10-11-12-13-14-15-17-19-21-24-28-33T
FRAME	Specialissima PRO carbon HM with Bianchi CV System, only electronic groupsets, fully internal cable routing, headset Acros ICR, direct mount brakes, BB-PressFit 86,5x41 sizes 47-50-53-55-57-59cm	BRAKE	Included in the shifter
HEADSET	Acros IS52 ICR SS custom headtube cover Specialissima	DISC ROTOR	Sram Rotor centerlock paceline x Road 160mm
FORK	Specialissima PRO full Carbon HM with CV, aero, integrated head, disc, 1.5 head, 12x100mm thru axle	RIM/WHEELSET	Velomann Palladium , 33mm profile, 700x21c, 24h, XDR body
SHIFTER	Sram Force eTap AXS D2 Hydraulic Disc Brake, 20mm Flat Mount	TIRE	Pirelli P ZERO™ Race , 26-622, 127TPI
REAR DERAILLEUR	Sram Force eTap AXS D2 12sp	STEM	Reparto Corse integrated handlebar, material Carbon, for Acros ICR system drop 125mm, reach 80mm Ext: 90/380 (47-50cm) ; 100/400 (53cm) ; 110/400 (55-57cm); 120/420 (59cm)
FRONT DERAILLEUR	Sram Force eTap AXS D2 braze on	HANDLEBAR	Included in the stem
CRANKSET	Sram Force D2 12sp, 48/35T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm, 175mm-61cm	GRIP / TAPE	Velo Black soft Microfiber tapes
BOTTOM BRACKET	Sram Press fit Road 86,5x41	SEATPOST	Specialissima Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/53cm, 350mm-55/59cm
CHAIN	Sram Force D1 12sp	SADDLE	Velomann Mitoral39 Hyper, open flow, carbon rails, carbon-reinforced nylon Large 139mm Length 250mm

SPECIALISSIMA PRO | ULTEGRA DI2 12SP | YUB45



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	MW - Carbon/Ckmetallic/CK16 MV - Carbon/Graphite irid/Black	BRAKE	Shimano BR-R8170 Hydraulic disc brake included in the shifter
FRAME	Specialissima PRO carbon HM with Bianchi CV System, only electronic groupsets, fully internal cable routing, headset Acros ICR, direct mount brakes, BB-PressFit 86,5x41 sizes 47-50-53-55-57-59cm	BRAKE LEVER	included
HEADSET	Acros IS52 ICR SS custom headtube cover Specialissima	DISC ROTOR	Shimano RT-CL800 center lock type w/Ice Tech, 160mm front rear
FORK	Specialissima PRO full Carbon HM with CV, aero, integrated head, disc, 1.5 head, 12x100mm thru axle	RIM/WHEELSET	Velomann PALLADIUM, 33mm profile, 700x21c, 24h, HG11
SHIFTER	Shimano Ultegra Di2 hydraulic disc brake for road, ST-R8170, BR-R8170, for 160mm rotor, resin pad	TIRE	Pirelli P ZERO™ Race , 26-622, 127TPI
REAR DERAILLEUR	Shimano Ultegra Di2 12sp, RD-R8150	STEM	Reparto Corse integrated handlebar, material Carbon, for Acros ICR system drop 125mm, reach 80mm Ext: 90/380 (47-50cm) ; 100/400 (53cm) ; 110/400 (55-57cm); 120/420 (59cm)
FRONT DERAILLEUR	Shimano, FD-R8150, Ultegra Di2, brazed-on type, down swing, top gear 50-54T, for rear 12-speed	HANDLEBAR	included in the stem
CRANKSET	Shimano Ultegra 12sp W/4iii Power Meter, FC-R8100, 12- speed, 52x36T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm	GRIP / TAPE	Velo Black soft Microfiber tapes
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit for road	SEATPOST	Specialissima Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm- 50/53cm, 350mm-55/59cm
CHAIN	Shimano Ultegra 12 sp CN-M8100	SADDLE	Velomann Mitorai39 Hyper, open flow, carbon rails, carbon-reinforced nylon Large 139mm Lenght 250mm
CASSETTE / FREEWHEEL	Shimano Ultegra, CS-R8100,Ultegra 12sp, 11-12-13- 14-15-16-17-19-21-24-27-30T		

SPECIALISSIMA PRO | ULTEGRA DI2 12SP | YUB45



COLOR	MW - Carbon/Ckmetallic/CK16 MV - Carbon/Graphite irid/Black
FRAME	Specialissima PRO carbon HM with Bianchi CV System, only electronic groupsets, fully internal cable routing, headset Acros ICR, direct mount brakes, BB-PressFit 86,5x41 sizes 47-50-53-55-57-59cm
HEADSET	Acros IS52 ICR SS custom headtube cover Specialissima
FORK	Specialissima PRO full Carbon HM with CV, aero, integrated head, disc, 1.5 head, 12x100mm thru axle
SHIFTER	Shimano Ultegra Di2 hydraulic disc brake for road, ST-R8170, BR-R8170, for 160mm rotor, resin pad
REAR DERAILLEUR	Shimano Ultegra Di2 12sp, RD-R8150
FRONT DERAILLEUR	Shimano, FD-R8150, Ultegra Di2, brazed-on type, down swing, top gear 50-54T, for rear 12-speed
CRANKSET	Shimano Ultegra 12sp W/4iii Power Meter, FC-R8100, 12-speed, 52x36T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit for road
CHAIN	Shimano Ultegra 12 sp CN-M8100
CASSETTE / FREEWHEEL	Shimano Ultegra, CS-R8100, Ultegra 12sp, 11-12-13-14-15-16-17-19-21-24-27-30T

BRAKE	Shimano BR-R8170 Hydraulic disc brake included in the shifter
BRAKE LEVER	included
DISC ROTOR	Shimano RT-CL800 center lock type w/Ice Tech, 160mm front rear
RIM/WHEELSET	Velomann PALLADIUM, 33mm profile, 700x21c, 24h, HG11
TIRE	Pirelli P ZERO™ Race , 26-622, 127TPI
STEM	Reparto Corse integrated handlebar, material Carbon, for Acros ICR system drop 125mm, reach 80mm Ext: 90/380 (47-50cm) ; 100/400 (53cm) ; 110/400 (55-57cm); 120/420 (59cm)
HANDLEBAR	included in the stem
GRIP / TAPE	Velo Black soft Microfiber tapes
SEATPOST	Specialissima Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/53cm, 350mm-55/59cm
SADDLE	Velomann Mitoro139 Hyper, open flow, carbon rails, carbon-reinforced nylon Large 139mm Lenght 250mm

SPECIALISSIMA PRO | FRAMEKIT | XTB08



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	MW - Carbon/CK16 Metallic/CK16 MV - Carbon/Graphite Irid./Black
FRAME	Specialissima PRO carbon HM with Bianchi CV, only electronic groupsets, fully internal cable routing, headset Acros ICR, direct mount brakes, BB-PressFit 86,5x41 sizes 47-50-53-55-57-59cm
HEADSET	Acros IS52 ICR
FORK	Specialissima PRO full Carbon HM with CV, aero, integrated head, disc, 1.5" head, 12x100mm thru axle
SEATPOST	Specialissima Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50~53cm, 350mm-55~59cm

*Frame price does not include cockpit.



SPECIALISSIMA COMP | ULTEGRA DI2 12SP | YTB46



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	MQ - CK16/Graphite MF - Graphite/Black	BRAKE LEVER	Included
FRAME	Specialissima COMP carbon, only electronic groupsets, fully internal cable routing, headset Acros ICR, direct mount brakes, BB-PressFit 86,5x41 sizes 47-50-53-55-57-59cm	DISC ROTOR	Shimano RT-CL800 center lock type w/Ice Tech, 160mm front rear
HEADSET	Acros IS52 ICR: custom headtube cover Specialissima	RIM/WHEELSET	Velomann PALLADIUM, 33mm profile, 700x21c, 24h, HG11
FORK	Specialissima COMP full Carbon, aero, integrated head, disc, 1.5 head, 12x100mm thru axle	TIRE	Vittoria Rubino V 28-622 TLR full black G2.0, graphene + silica, 100TPI,
SHIFTER	Shimano Ultegra Di2 hydraulic disc brake for road, ST-R8170, BR-R8170, for 160mm rotor, resin pad	STEM	Velomann, AL6061, fully internal cable routing stem, compatible with Acros AICR system, Ext: 90mm (47), 100mm(50/53), 110mm(55/57), 120mm(59)
REAR DERAILLEUR	Shimano Ultegra Di2 12sp, RD-R8150	HANDLEBAR	Velomann Aero Compact handlebar, alloy diam. 31,8mm, reach 74mm, drop 116mm, Size: 400mm-47/53cm, 420mm-55/59cm
FRONT DERAILLEUR	Shimano, FD-R8150, Ultegra Di2, brazed-on type, down swing, top gear 50-54T, for rear 12-speed	GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
CRANKSET	Shimano Ultegra 12sp, FC-R8100, 12- speed, 50/34T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm	SEATPOST	Specialissima Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/53cm, 350mm-55/59cm
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit for road	SADDLE	Velomann Mitora139, open flow, AISI rails, carbon-reinforced nylon Large 139mm Length 250mm
CHAIN	Shimano Ultegra 12sp CN-M8100		
CASSETTE / FREEWHEEL	Shimano Ultegra, CS-R8100,Ultegra 12sp, 11-12-13-14-15-16-17-19-21-24-27-30T		
BRAKE	Shimano BR-R8170 Hydraulic disc brake included in the shifter		

SPECIALISSIMA COMP | ULTEGRA DI2 12SP | YTB46



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	MQ - CK16/Graphite MF - Graphite/Black	BRAKE LEVER	Included
FRAME	Specialissima COMP carbon, only electronic groupsets, fully internal cable routing, headset Acros ICR, direct mount brakes, BB-PressFit 86,5x41 sizes 47-50-53-55-57-59cm	DISC ROTOR	Shimano RT-CL800 center lock type w/Ice Tech, 160mm front rear
HEADSET	Acros IS52 ICR: custom headtube cover Specialissima	RIM/WHEELSET	Velomann PALLADIUM, 33mm profile, 700x21c, 24h, HG11
FORK	Specialissima COMP full Carbon, aero, integrated head, disc, 1.5 head, 12x100mm thru axle	TIRE	Vittoria Rubino V 28-622 TLR full black G2.0, graphene + silica, 100TPI,
SHIFTER	Shimano Ultegra Di2 hydraulic disc brake for road, ST-R8170, BR-R8170, for 160mm rotor, resin pad	STEM	Velomann, AL6061, fully internal cable routing stem, compatible with Acros AICR system, Ext: 90mm (47), 100mm(50/53), 110mm(55/57), 120mm(59)
REAR DERAILLEUR	Shimano Ultegra Di2 12sp, RD-R8150	HANDLEBAR	Velomann Aero Compact handlebar, alloy diam. 31,8mm, reach 74mm, drop 116mm, Size: 400mm-47/53cm, 420mm-55/59cm
FRONT DERAILLEUR	Shimano, FD-R8150, Ultegra Di2, brazed-on type, down swing, top gear 50-54T, for rear 12-speed	GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
CRANKSET	Shimano Ultegra 12sp, FC-R8100, 12- speed, 50/34T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm	SEATPOST	Specialissima Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/53cm, 350mm-55/59cm
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit for road	SADDLE	Velomann Mitoro139, open flow, AISI rails, carbon-reinforced nylon Large 139mm Length 250mm
CHAIN	Shimano Ultegra 12sp CN-M8100		
CASSETTE / FREEWHEEL	Shimano Ultegra, CS-R8100,Ultegra 12sp, 11-12-13-14-15-16-17-19-21-24-27-30T		
BRAKE	Shimano BR-R8170 Hydraulic disc brake included in the shifter		

SPECIALISSIMA COMP | 105 DI2 12SP | YTB47




The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	MQ - CK16/Graphite MF - Graphite/Black
FRAME	Specialissima COMP carbon, only electronic groupsets, fully internal cable routing, headset Acros ICR, direct mount brakes, BB-PressFit 86,5x41 sizes 47-50-53-55-57-59cm
HEADSET	Acros IS52 ICR: custom headtube cover Specialissima
FORK	Specialissima COMP full Carbon, aero, integrated head, disc, 1.5 head, 12x100mm thru axle
SHIFTER	Shimano 105 Di2 hydraulic disc brake for road, ST-R7170, BR-R7170, for 160mm rotor, resin pad
REAR DERAILLEUR	Shimano 105 Di2 12sp, RD-R7150
FRONT DERAILLEUR	Shimano, FD-R7150, 105 Di2, brazed-on type, down swing, top gear 50-52T, for rear 12-speed
CRANKSET	Shimano 105 12sp, FC-R7100, 12- speed, 50x34T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit for road
CHAIN	Shimano 105 12sp CN-M7100
CASSETTE / FREEWHEEL	Shimano, CS-R7100, 105, 12-SPEED, 11-12-13-14-15-17-19-21-24-27-30-34T
BRAKE	Shimano BR-R8170 Hydraulic disc brake included in the shifter

BRAKE LEVER	Included
DISC ROTOR	Shimano SM-RT70 rotor for disc brake center lock , with Ice Technology, S 160mm
RIM/WHEELSET	Velomann PALLADIUM, 33mm profile, 700x21c, 24h, HG11
TIRE	Vittoria Rubino V 28-622 TLR full black G2.0, graphene + silica, 100TPI,
STEM	Velomann, AL6061, fully internal cable routing stem, compatible with Acros AICR system, Ext: 90mm (47), 100mm(50/53), 110mm(55/57), 120mm(59)
HANDLEBAR	Velomann Aero Compact handlebar, alloy diam. 31,8mm, reach 74mm, drop 116mm, Size: 400mm-47/53cm, 420mm-55/59cm
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, black
SEATPOST	Specialissima Full Carbon Aero special dimension seatpost, 20mm offset, length: 280mm-47cm, 300mm-50/53cm, 350mm-55/59cm
SADDLE	Velomann Mitoral39, open flow, AISI rails, carbon-reinforced nylon Large 139mm Length 250mm

SPRINT

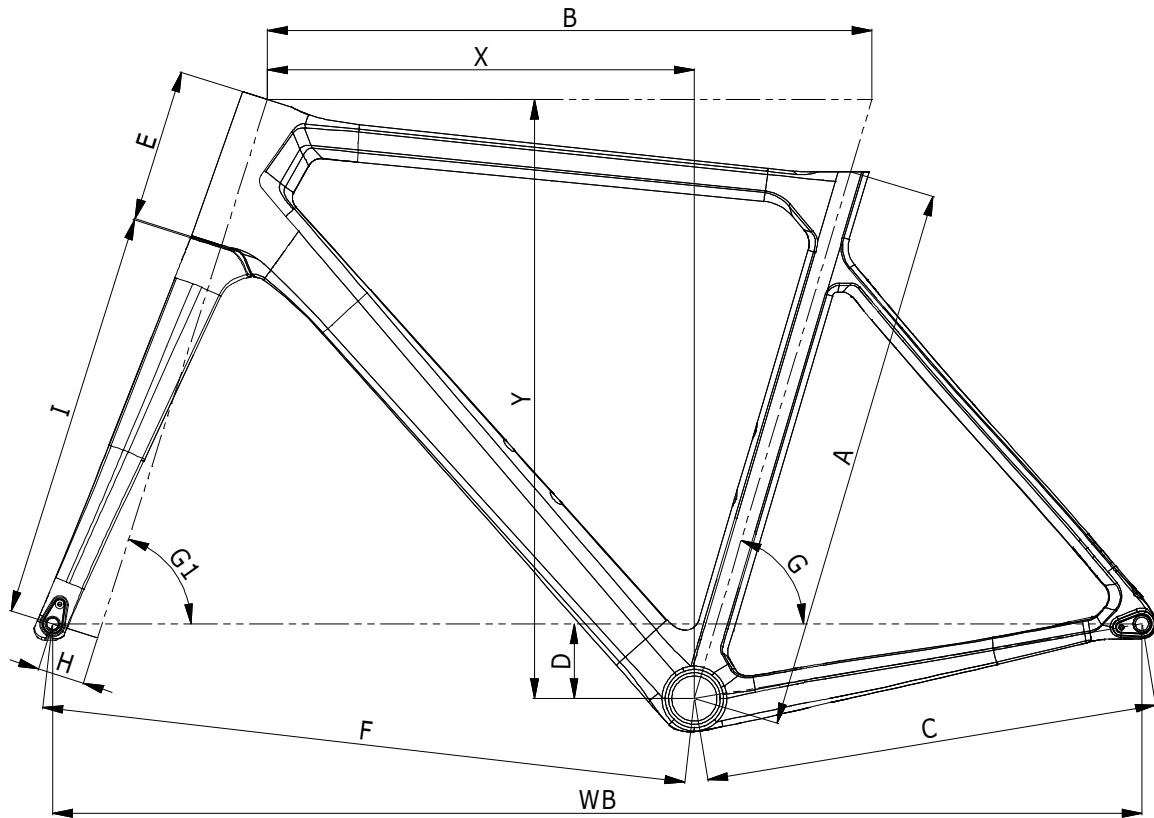

Sprint ICR													
SIZE	A	B	C	D	E	F	G	G1	H	I	X	Y	WB
470	420	515	410	60	105	580	74.5°	70.5°	43	373	377	497	982
500	450	525	410	60	110	582	74.5°	71.5°	43	373	383	505	983
530	480	535	410	68	125	583	74°	72°	43	373	384	529	984
550	500	550	413	68	140	588	73.5°	73°	43	373	388	545	991
570	520	560	413	68	155	593	73.5°	73°	43	373	393	561	996
590	540	575	413	68	175	603	73°	73°	43	373	396	580	1006
610	560	585	415	68	195	607	72.5°	73°	43	373	397	599	1012

SPRINT | 105 Di2 12 SP | YTBR5



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	SX - CK16 / Black - Full Glossy
FRAME	Sprint carbon monocoque, mechanical/electronic shifting compatible, BB-PressFit 86,5x41, head tube 12/4-1.5, integrated seat clamp, disc brake flat mount, thru axle 12x142 sizes 47-50-53-55-57-59-61cm
SEATPOST CLAMP	Included in the frame
HEADSET	ACROS & FSA, for internal cable routing
FORK	Full Carbon Aero Road 1.4x1.5 integrated head, disc brake flat mount, thru axle 12x100
SHIFTER	Shimano 105 Di2 hydraulic disc brake for road, ST-R7170, BR-R7170, for 160mm rotor
REAR DERAILLEUR	Shimano 105 Di2, RD-R7150 12-speed
FRONT DERAILLEUR	Shimano 105 Di2, FD-R7150 12-speed
CRANKSET	Shimano 105 12sp, FC-R7100, 50/34T for rear 12- speed, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm, 175mm-61cm
BOTTOM BRACKET	Token Ninja Lite BB4124PS, for 24mm spindle, threaded design
CHAIN	Shimano 12sp, CN-M7100
CASSETTE / FREEWHEEL	Shimano, 105 12sp, CS-R7100, 11-12-13-14-15-17-19-21-24-27-30-34T
BRAKE	Shimano, BR-R7170 Hydraulic disc brake, included in the shifter

DISC ROTOR	Shimano rotor for disc brake center lock, SM-RT70, 160mm
RIM/WHEELSET	Velomann V30R, alloy, 23mm channel, 30mm profile. 2 to 1 spoke pattern, j-bend spokes, black, HG11 body, weight : 1790g
TIRE	Vittoria Rubino V 28-622 TLR full black G2.0, graphene + silica, 100TPI,
STEM	Velomann, Alloy 6061, raise - 7° Ext: 90mm-47/50cm, 100mm-53cm, 110mm-55/57cm, 120mm-59/61cm
HANDLEBAR	Velomann Compact, alloy 6061, diam. 31,8mm, reach 80mm, drop 130mm Size: 400mm-47/53cm, 420mm-55/59cm, 440mm-61cm
GRIP / TAPE	Bianchi Hexagon tape, 2.5mm thickness, black
SEATPOST	Velomann carbon, 15mm offset, 27.2mm, 350mm
SADDLE	Velomann Mitoro139.1 saddle, 250x139mm, steel rail

SPRINT | 105 Di2 12V | YTBR6



Immagine a scopo indicativo. Componenti e dettagli grafici potrebbero non corrispondere al modello reale. Bianchi si riserva il diritto di modificare le specifiche.

COLORI	SX - CK16 - Nero [Lucido] SZ - Grigio chiaro - Iridescente [Lucido] SI - Celeste Metallico - CK16 [Lucido] SK - Bianco - Blu Viola [Lucido]
TELAIO	Bianchi Sprint, Carbonio monoscocca, compatibile con gruppi meccanici ed elettronici, BB-PressFit 86,5x41, tubo sterzo 1,5"/1,5", bloccaggio reggisella integrato, freno a disco flat mount, perno passante 12x142 mm taglie 47-50-53-55-57-59-61
MORSETTO REGGISELLA	Bianchi Personalizzato
REGGISELLA	Velomann Carbonio, offset 15 mm, diametro 27,2 mm lunghezza: 350 mm
SERIE STERZO	Acros & FSA per cavi integrati
FORCELLA	Bianchi Sprint, carbonio, aero, testa integrata 1,5", freno a disco flat mount, perno passante 12x100 mm
ATTACCO MANUBRIO	Velomann AL6061, rise -7° Taglie: 90 mm (47-50 cm); 100 mm (53 cm); 110 mm (55-57 cm); 120 mm (59-61 cm)
MANUBRIO	Velomann Compact, alluminio, diametro 31.8 mm, reach 80 mm, drop 130 mm Taglie: 400 mm (47-53 cm); 420 mm (55-59 cm); 440 mm (61 cm)
MANOPOLE / NASTRO	Bianchi nastro Hexagon, spessore 2,5 mm, nero
SELLA	Velomann Mitora 139.1, steel rails, length 250 mm, width 139 mm

RUOTE	Velomann V30R, alluminio, larghezza canale interno 23 mm, altezza profilo 30 mm, raggiatura 2 a 1, raggi a testa curva, nero, corpetto HG11, peso: 1790 g
COPERTURE	Vittoria Rubino V, 28-622, Full Black, G2.0, Graphene + Silica, 100 TPI
COMANDI	Shimano 105 Di2, comando-leva ST-R7170, pinza BR-R7170
DERAGLIATORE POSTERIORE	Shimano 105 Di2, RD-R7150, 12v
DERAGLIATORE ANTERIORE	Shimano 105 Di2, FD-R7150
GUARNITURA	Shimano 105, FC-R7100, Hollowtech 2, 50x34T Lunghezza pedivella: 170 mm (47-53 cm); 172.5 mm (55-59 cm); 175 mm (61 cm)
MOVIMENTO CENTRALE	Shimano SM-BB72-41B, press fit per road
CATENA	Shimano 105, CN-M7100
CASSETTA / RUOTA LIBERA	Shimano 105, CS-R7100 11-34T, 11-12-13-14-15-17-19-21-24-27-30-34T
LEVE FRENO	Inclusa nel comando
PINZE FRENO	Shimano BR-R7170 Freno a disco idraulico
ROTORE ANTERIORE	Shimano SM-RT70 Center Lock con Ice Tech, 160 mm
ROTORE POSTERIORE	Shimano SM-RT70 Center Lock con Ice Tech, 160 mm

SPRINT | 105 12SP | YTBR5



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	SX - CK16 / Black - Full Glossy SZ - Light grey / Iridescent - Full Glossy
FRAME	Sprint carbon monocoque, mechanical/electronic shifting compatible, BB-PressFit 86,5x41, head tube 11.4-1.5, integrated seat clamp, disc brake flat mount, thru axle 12x142 sizes 47-50-53-55-57-59-61cm
SEATPOST CLAMP	Included in the frame
HEADSET	ACROS & FSA, for internal cable routing
FORK	Full Carbon Aero Road 1.4x1.5 integrated head, disc brake flat mount, thru axle 12x100
SHIFTER	Shimano 105 hydraulic disc brake for road, ST-R7120, BR-R7170, for 160mm rotor
REAR DERAILLEUR	Shimano 105 12sp, RD-R7100
FRONT DERAILLEUR	Shimano 105 12sp, FD-R7100
CRANKSET	Shimano 105 12sp, FC-R7100, 50/34T for rear 12-speed, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm, 175mm-61cm
BOTTOM BRACKET	Token Ninja Lite BB4124PS, for 24mm spindle, threaded design
CHAIN	Shimano CN-M6100, 12sp
CASSETTE / FREEWHEEL	Shimano, 105 12sp, CS-R7100, 11-12-13-14-15-17-19-21-24-27-30-34T

BRAKE	Shimano, Hydraulic disc brake, included in the shifter
BRAKE LEVER	included
DISC ROTOR	Shimano rotor for disc brake center lock, SM-RT70, 160mm
RIM/WHEELSET	Velomann V30R, alloy, 23mm channel, 30mm profile. 2 to 1 spoke pattern, j-bend spokes, black, HG11 body, weight : 1790g
TIRE	Vittoria Rubino V 28-622 TLR full black G2.0, graphene + silica, 100TPI,
STEM	Velomann, Alloy 6061, raise - 7° Ext: 90mm-47/50cm, 100mm-53cm, 110mm-55/57cm, 120mm-59/61cm
HANDLEBAR	Velomann Compact, alloy 6061, diam. 31,8mm, reach 80mm, drop 130mm Size: 400mm-47/53cm, 420mm-55/59cm, 440mm-61cm
GRIP / TAPE	Bianchi Hexagon tape, 2.5mm thickness, black
SEATPOST	Velomann carbon, 15mm offset, 27.2mm, 350mm
SADDLE	Velomann Mitoro139.1 saddle, 250x139mm, steel rail

TIME TRIAL TRIATHLON

AQUILA

AQUILA RC | FRAMESET | XUB56



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLORS	ZY - Metallic Celeste / Carbon UD Black [Full Glossy]
FRAME	Bianchi AQUILA, Disc brake: Flat Mount 140/160, Bottom bracket: PressFit 86.5x41, Thru axle: 12x142 mm, Max chainring: 58T (2x) - 62T (1x), Max tire clearance: ETRTO 622-28 mm sizes SM-MD-LG
SEATPOST CLAMP	Bianchi Custom
SEATPOST	Bianchi Custom Airfoil Shape, Offset: Ritchey Rail length: 280 mm (SM); 300 mm (MD); 350 mm (LG)
HEADSET	FSA Custom
FORK	Bianchi Aquila, Disc brake: Flat Mount 140/160, Thru axle: 12x100 mm, Max tire clearance: ETRTO 622-28 mm, Steering tube diameter: 1 1/8"

AQUILA | RIVAL ETAP AXS E1 | YUB58



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLORS	ZY - Metallic Celeste / Carbon UD Black [Full Glossy] AD - White / Petrol Green - Mint [Full Glossy]
FRAME	Bianchi AQUILA, Disc brake: Flat Mount 140/160, Bottom bracket: PressFit 86.5x41, Thru axle: 12x142 mm, Max chainring: 58T (2x) - 62T (1x), Max tire clearance: ETRTO 622-28 mm sizes SM-MD-LG
SEATPOST CLAMP	Bianchi Custom
SEATPOST	Bianchi Custom Airfoil Shape, Offset: Ritchey Rail length: 280 mm (SM); 300 mm (MD); 350 mm (LG)
HEADSET	FSA Custom
FORK	Bianchi Aquila, Disc brake: Flat Mount 140/160, Thru axle: 12x100 mm, Max tire clearance: ETRTO 622-28 mm, Steering tube diameter: 1 1/8"
STEM	Bianchi Included in the handlebar
HANDLEBAR	Bianchi Reparto Corse by Vision, Diameter of steering tube interface: 1 1/8", Misura: 110/400 mm (SM-MD-LG) - Extensions: Vision JS bend Carbon, compatible with Vision TFE extensions (not include), bridge for TFE not included
GRIP / TAPE	Bianchi Hexagon tape, 2.5 mm thickness, black
SADDLE	Selle Italia Watt, 3D, Manganese rail, Triathlon specific

WHEELSET	Velomann V30R, alloy, internal channel width 23 mm, profile height 30 mm, 2 to 1 spoke pattern, j-bend spokes, black, XDR body, weight: 1790 g
TIRE	Pirelli P Zero Race SL TLR, 28-622, 120 TPI
SHIFTER	Sram S-900 Aero HRD with Remote Switch
REAR DERAILLEUR	Sram Rival AXS E1, 12sp
FRONT DERAILLEUR	Sram Rival AXS E1
CRANKSET	Sram Rival E1, 48x35T Crank length: 165 mm (SM) 170 mm (MD); 172.5 mm (LG)
BOTTOM BRACKET	Sram Press fit Road 86.5x41
CHAIN	Sram Rival E1
CASSETTE / FREEWHEEL	Sram Rival XG 1250 D1, 10-36, 10-11-12-13-15-17-19-21-24-28-32-36T
BRAKE LEVER	Included in the shifter
BRAKE	Sram Rival E1, Hydraulic disc brake
FRONT DISK ROTOR	Sram Centerline, Center Lock, 160 mm
REAR DISK ROTOR	Sram Centerline, Center Lock, 160 mm

ENDURANCE

INFINITO CV

INFINITO ICR

INFINITO PRO | ULTEGRA DI2 4III PWM | YVB3K



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLORS	8B - Metallic Celeste/Dark turquoise - CK16 [Full glossy]
	8C - Metallic White Italy - Chrome [Full Glossy]
	9H - Acid Celeste [Glossy] - Black [Matt]
FRAME	Bianchi Infinito, Countervail technology, Flat mount 140/160, PressFit 86.5x41 mm, Thru Axle 12x142 mm, Sram UDH compatible, Max chainring compatibility: 46-54T, Internal cable routing, Tire clearance: ETRTO 622-40 sizes 47-50-53-55-57-59-61
SEATPOST CLAMP	Bianchi Custom
SEATPOST	Bianchi Infinito, Countervail technology, full carbon, aero-flex shape length: 320 mm, 0 offset (47-55 cm); 380 mm, -20 mm offset (57-61 cm)
HEADSET	Acros for internal cable routing
FORK	Bianchi Infinito, Countervail technology, Flat mount disc 140/160, Thru axle, OLD: 100 mm, Steerer tube diameter: 1"1/8
STEM	Bianchi Reparto Corse integrated handlebar, carbon, for Acros Integrated Cable Routing headset, drop 125 mm, reach 80 mm Size: 90/380 mm (47-50 cm); 100/400 mm (53-55 cm); 110/400 mm (57-59 cm); 120/420 mm (61 cm)
HANDLEBAR	Included in the stem
GRIP / TAPE	Bianchi Hexagon tape, 2.5 mm thickness, black
SADDLE	Bianchi Carbon Rail, length 260 mm, width 150 mm

WHEELSET	Bianchi Reparto Corse R49, Carbon rim, 49 mm profile, 700x25c, 24h, Tubeless ready, Straight pull spokes, Ratchet system, HG11 body
TIRE	Pirelli P Zero Race TLR, 35-622, 120 TPI
SHIFTER	Shimano Ultegra Di2, shifter lever ST-R8170, caliper BR-R8170
REAR DERAILLEUR	Shimano Ultegra Di2, RD-R8150, 12sp
FRONT DERAILLEUR	Shimano Ultegra Di2, FD-R8150
CRANKSET	Shimano Ultegra, FC-R8100, 4iiii precision 3 single side power meter, 50x34T Crank length: 165 mm (47-50 cm); 170 mm (53-55 cm); 172.5 mm (57-59 cm); 175 mm (61 cm)
BOTTOM BRACKET	Shimano SM-BB71-41B, press fit type for road
CHAIN	Shimano Ultegra, CN-M8100
CASSETTE / FREEWHEEL	Shimano Ultegra, CS-R8101 11-34T, 11-12-13-14-15-17-19-21-24-27-30-34T
BRAKE LEVER	Included in the shifter
BRAKE	Shimano BR-R8170 Hydraulic disc brake
FRONT DISK ROTOR	Shimano RT-CL800 Center Lock with Ice Tech, 160 mm
REAR DISK ROTOR	Shimano RT-CL800 Center Lock with Ice Tech, 160 mm

INFINITO PRO | ULTEGRA DI2 4iiii PWM | YVB3K



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLORS	8B - Metallic Celeste/Dark turquoise - CK16 [Full glossy]
	8C - Metallic White Italy - Chrome [Full Glossy]
	9H - Acid Celeste [Glossy] - Black [Matt]
FRAME	Bianchi Infinito, Countervail technology, Flat mount 140/160, PressFit 86.5x41 mm, Thru Axle 12x142 mm, Sram UDH compatible, Max chainring compatibility: 46-54T, Internal cable routing, Tire clearance: ETRTO 622-40 sizes 47-50-53-55-57-59-61
SEATPOST CLAMP	Bianchi Custom
SEATPOST	Bianchi Infinito, Countervail technology, full carbon, aero-flex shape length: 320 mm, 0 offset (47-55 cm); 380 mm, -20 mm offset (57-61 cm)
HEADSET	Acros for internal cable routing
FORK	Bianchi Infinito, Countervail technology, Flat mount disc 140/160, Thru axle, OLD: 100 mm, Steerer tube diameter: 1"1/8
STEM	Bianchi Reparto Corse integrated handlebar, carbon, for Acros Integrated Cable Routing headset, drop 125 mm, reach 80 mm Size: 90/380 mm (47-50 cm); 100/400 mm (53-55 cm); 110/400 mm (57-59 cm); 120/420 mm (61 cm)
HANDLEBAR	Included in the stem
GRIP / TAPE	Bianchi Hexagon tape, 2.5 mm thickness, black
SADDLE	Bianchi Carbon Rail, length 260 mm, width 150 mm

WHEELSET	Bianchi Reparto Corse R49, Carbon rim, 49 mm profile, 700x25c, 24h, Tubeless ready, Straight pull spokes, Ratchet system, HG11 body
TIRE	Pirelli P Zero Race TLR, 35-622, 120 TPI
SHIFTER	Shimano Ultegra Di2, shifter lever ST-R8170, caliper BR-R8170
REAR DERAILLEUR	Shimano Ultegra Di2, RD-R8150, 12sp
FRONT DERAILLEUR	Shimano Ultegra Di2, FD-R8150
CRANKSET	Shimano Ultegra, FC-R8100, 4iiii precision 3 single side power meter, 50x34T Crank length: 165 mm (47-50 cm); 170 mm (53-55 cm); 172.5 mm (57-59 cm); 175 mm (61 cm)
BOTTOM BRACKET	Shimano SM-BB71-41B, press fit type for road
CHAIN	Shimano Ultegra, CN-M8100
CASSETTE / FREEWHEEL	Shimano Ultegra, CS-R8101 11-34T, 11-12-13-14-15-17-19-21-24-27-30-34T
BRAKE LEVER	Included in the shifter
BRAKE	Shimano BR-R8170 Hydraulic disc brake
FRONT DISK ROTOR	Shimano RT-CL800 Center Lock with Ice Tech, 160 mm
REAR DISK ROTOR	Shimano RT-CL800 Center Lock with Ice Tech, 160 mm

INFINITO PRO | FORCE ETAP AXS E1 PWM | YVB4K



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLORS	8B - Metallic Celeste/Dark turquoise - CK16 [Full glossy]
	8C - Metallic White Italy - Chrome [Full Glossy]
	9H - Acid Celeste [Glossy] - Black [Matt]
FRAME	Bianchi Infinito, Countervail technology, Flat mount 140/160, PressFit 86.5x41 mm, Thru Axle 12x142 mm, Sram UDH compatible, Max chainring compatibility: 46-54T, Internal cable routing, Tire clearance: ETRTO 622-40 sizes 47-50-53-55-57-59-61
SEATPOST CLAMP	Bianchi Custom
SEATPOST	Bianchi Infinito, Countervail technology, full carbon, aero-flex shape length: 320 mm, 0 offset (47-55 cm); 380 mm, -20 mm offset (57-61 cm)
HEADSET	Acros for internal cable routing
FORK	Bianchi Infinito, Countervail technology, Flat mount disc 140/160, Thru axle, OLD: 100 mm, Steerer tube diameter: 1"1/8
STEM	Bianchi Reparto Corse integrated handlebar, carbon, for Acros Integrated Cable Routing headset, drop 125 mm, reach 80 mm Size: 90/380 mm (47-50 cm); 100/400 mm (53-55 cm); 110/400 mm (57-59 cm); 120/420 mm (61 cm)
HANDLEBAR	Included in the stem
GRIP / TAPE	Bianchi Hexagon tape, 2.5 mm thickness, black
SADDLE	Bianchi Carbon Rail, length 260 mm, width 150 mm

WHEELSET	Bianchi Reparto Corse R49, Carbon rim, 49 mm profile, 700x25c, 24h, Tubeless ready, Straight pull spokes, Ratchet system, XDR body
TIRE	Pirelli P Zero Race TLR, 35-622, 120 TPI
SHIFTER	Sram Force AXS E1
REAR DERAILLEUR	Sram Force AXS E1, 12sp
FRONT DERAILLEUR	Sram Force AXS E1
CRANKSET	Sram Force E1, Quarq Spindle Power Meter, 46x33T Crank length: 165 mm (47-50 cm); 170 mm (53-55 cm); 172.5 mm (57-59 cm); 175 mm (61 cm)
BOTTOM BRACKET	Sram Press fit Road 86.5x41
CHAIN	Sram Force E1
CASSETTE / FREEWHEEL	Sram Force XG 1270 E1, 10-36T, 10-11-12-13-15-17-19-21-24-28-32-36T
BRAKE LEVER	Included in the shifter
BRAKE	Sram Force E1, Hydraulic disc brake
FRONT DISK ROTOR	Sram Paceline, Center Lock, 160 mm
REAR DISK ROTOR	Sram Paceline, Center Lock, 160 mm

INFINITO COMP | 105 Di2 12SP | YVB5K



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLORS	8E - Petrol green - CK16 [Full Satin] 8H - Sparkling black - Gold [Full Glossy]
FRAME	Bianchi Infinito, Countervail technology, Flat mount 140/160, PressFit 86.5x41 mm, Thru Axle 12x142 mm, Sram UDH compatible, Max chainring compatibility: 46-54T, Internal cable routing, Tire clearance: ETRTO 622-40 sizes 47-50-53-55-57-59-61
SEATPOST CLAMP	Bianchi Custom
SEATPOST	Bianchi Infinito, Countervail technology, full carbon, aero-flex shape length: 320 mm, 0 offset (47-55 cm); 380 mm, -20 mm offset (57-61 cm)
HEADSET	Acros for internal cable routing
FORK	Bianchi Infinito, Countervail technology, Flat mount disc 140/160, Thru axle, OLD: 100 mm, Steerer tube diameter: 1"1/8
STEM	Velomann AL6061, fully internal cable routing stem, compatible with Acros ICR system Size: 90 mm (47-50 cm); 100 mm (53-55 cm); 110 mm (57-59 cm); 120 mm (61 cm)
HANDLEBAR	Velomann Aero Compact handlebar, alloy, diameter 31.8 mm, reach 74 mm, drop 116 mm Size: 380 mm (47-50 cm); 400 mm (53-59 cm); 420 mm (61 cm)
GRIP / TAPE	Bianchi Hexagon tape, 2.5 mm thickness, black
SADDLE	Bianchi Manganese Rail, length 260 mm, width 150 mm

WHEELSET	Bianchi R49, Carbon rim, 49 mm profile, 700x25c, 24h, Tubeless ready, Ratchet system, HG11 body
TIRE	Pirelli P Zero Road TLR, 35-622, 120 TPI
SHIFTER	Shimano 105 Di2, shifter lever ST-R7170, caliper BR-R7170
REAR DERAILLEUR	Shimano 105 Di2, RD-R7150, 12sp
FRONT DERAILLEUR	Shimano 105 Di2, FD-R7150
CRANKSET	Shimano 105, FC-R7100, Hollowtech 2, 50x34T Crank length: 165 mm (47-50 cm); 170 mm (53-55 cm); 172.5 mm (57-59 cm); 175 mm (61 cm)
BOTTOM BRACKET	Shimano SM-BB71-41B, press fit type for road
CHAIN	Shimano 105, CN-M7100
CASSETTE / FREEWHEEL	Shimano 105, CS-R7101 11-36T, 11-12-13-14-15-17-19-21-24-28-32-36T
BRAKE LEVER	Included in the shifter
BRAKE	Shimano BR-R7170 Hydraulic disc brake
FRONT DISK ROTOR	Shimano RT-CL700 Center Lock, 160 mm
REAR DISK ROTOR	Shimano RT-CL700 Center Lock, 160 mm

INFINITO ICR | ULTEGRA DI2 | YTB4D



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	2K: CK16 celeste glossy / black decals 2M: Purple black - glossy/ black - matt decals
FRAME	INFINITO carbon ICR - 1.5" - 1.5", Disc Brake, Mechanical/Electronic Di2, compatible with 32" tire, BBset pressfit 86,5x41, rear dropout 12 x 142mm thru axle sizes 47-50-53-55-57-59-61cm
HEADSET	Acros/FSA for ICR cable routing
FORK	Full Carbon ICR - 28" - 300mm - 1.5", dropout 12 x 100mm thru axle
SHIFTER	Ultegra Di2 hydraulic disc brake for road ST-R8170(L), ST-R8170 (R)
REAR DERAILLEUR	Ultegra Di2 12sp RD-R8150, 12-speed, max 34T
FRONT DERAILLEUR	Ultegra Di2 12sp FD-R8150, Ultegra Di2, brazed-on type
CRANKSET	Ultegra 12sp FC-R8100, hollowtech 2, for rear 12- speed, 170-172,5-175mm, 50x34T Crank Length:170mm-47~54cm, 172.5mm-55~59cm, 175mm-61cm
BOTTOM BRACKET	Shimano KSMBB7241B pressfit
CHAIN	Shimano CN-M8100, 12- speed

CASSETTE / FREEWHEEL	Ultegra 12sp 11-34T CS-R8100,Ultegra 12sp, 11-12-13-14-15-17-19-21-24-27-30-34T
BRAKE	Shimano BR-R8170 Hydraulic disc brake included in the shifter
DISC ROTOR	Shimano RT-CL800, 160mm front rear
RIM/WHEELSET	Velomann Palladium, 33mm profile, 700x21c, 24h, HG11 body, spoke pattern 2 to 1, tubeless-ready, set 1450 gr, sealed cartridge bearings
TIRE	Pirelli Cinturato™ Velo TLR 32mm (622-32), ArmourTech
STEM	Velomann, AL6061, fully internal cable routing stem, compatible with Acros AICR system Ext: 90mm (47), 100mm(50/53), 110mm(55/57), 120mm(59/61)
HANDLEBAR	Velomann Aero Compact handlebar full ICR, alloy diam. 31,8mm, reach 74mm, drop 116mm Size: 400mm-47~53cm, 420mm-55~57cm, 440-59"61cm
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, full black
SEATPOST	Velomann, custom D-shape, alloy shaft 2014, head alloy 6061, Setback 25mm L350mm =47~57cm; L380mm= 59~61cm
SADDLE	Velomann Mitora Lite 139 saddle, 139x250mm carbon rail 7x9,1mm

INFINITO ICR | ULTEGRA DI2 | YTB4D



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	2K: CK16 celeste glossy / black decals 2M: Purple black - glossy/ black - matt decals
FRAME	INFINITO carbon ICR - 1.5" - 1.5", Disc Brake, Mechanical/Electronic Di2, compatible with 32" tire, BBset pressfit 86,5x41, rear dropout 12 x 142mm thru axle sizes 47-50-53-55-57-59-61cm
HEADSET	Acros/FSA for ICR cable routing
FORK	Full Carbon ICR - 28" - 300mm - 1.5" , dropout 12 x 100mm thru axle
SHIFTER	Ultegra Di2 hydraulic disc brake for road ST-R8170(L), ST-R8170 (R)
REAR DERAILLEUR	Ultegra Di2 12sp RD-R8150, 12-speed, max 34T
FRONT DERAILLEUR	Ultegra Di2 12sp FD-R8150, Ultegra Di2, brazed-on type
CRANKSET	Ultegra 12sp FC-R8100, hollowtech 2, for rear 12- speed, 170-172,5-175mm, 50x34T Crank Length:170mm-47~54cm, 172.5mm-55~59cm, 175mm-61cm
BOTTOM BRACKET	Shimano KSMBB7241B pressfit
CHAIN	Shimano CN-M8100, 12- speed

CASSETTE / FREEWHEEL	Ultegra 12sp 11-34T CS-R8100,Ultegra 12sp, 11-12-13-14-15-17-19-21-24-27-30-34T
BRAKE	Shimano BR-R8170 Hydraulic disc brake included in the shifter
DISC ROTOR	Shimano RT-CL800, 160mm front rear
RIM/WHEELSET	Velomann Palladium, 33mm profile, 700x21c, 24h, HG11 body, spoke pattern 2 to 1, tubeless-ready, set 1450 gr, sealed cartridge bearings
TIRE	Pirelli Cinturato™ Velo TLR 32mm (622-32), ArmourTech
STEM	Velomann, AL6061, fully internal cable routing stem, compatible with Acros AICR system Ext: 90mm (47), 100mm(50/53), 110mm(55/57), 120mm(59/61)
HANDLEBAR	Velomann Aero Compact handlebar full ICR, alloy diam. 31,8mm, reach 74mm, drop 116mm Size: 400mm-47~53cm, 420mm-55~57cm, 440-59"61cm
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, full black
SEATPOST	Velomann, custom D-shape, alloy shaft 2014, head alloy 6061, Setback 25mm L350mm =47~57cm; L380mm= 59~61cm
SADDLE	Velomann Mitora Lite 139 saddle, 139x250mm carbon rail 7x9,1mm

INFINITO ICR | ULTEGRA DI2 | YTB4D



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	2K: CK16 celeste glossy / black decals 2M: Purple black - glossy/ black - matt decals
FRAME	INFINITO carbon ICR - 1.5" - 1.5", Disc Brake, Mechanical/Electronic Di2, compatible with 32" tire, BBset pressfit 86,5x41, rear dropout 12 x 142mm thru axle sizes 47-50-53-55-57-59-61cm
HEADSET	Acros/FSA for ICR cable routing
FORK	Full Carbon ICR - 28" - 300mm - 1.5", dropout 12 x 100mm thru axle
SHIFTER	Ultegra Di2 hydraulic disc brake for road ST-R8170(L), ST-R8170 (R)
REAR DERAILLEUR	Ultegra Di2 12sp RD-R8150, 12-speed, max 34T
FRONT DERAILLEUR	Ultegra Di2 12sp FD-R8150, Ultegra Di2, brazed-on type
CRANKSET	Ultegra 12sp FC-R8100, hollowtech 2, for rear 12- speed, 170-172,5-175mm, 50x34T Crank Length:170mm-47~54cm, 172.5mm-55~59cm, 175mm-61cm
BOTTOM BRACKET	Shimano KSMBB7241B pressfit
CHAIN	Shimano CN-M8100, 12- speed

CASSETTE / FREEWHEEL	Ultegra 12sp 11-34T CS-R8100,Ultegra 12sp, 11-12-13-14-15-17-19-21-24-27-30-34T
BRAKE	Shimano BR-R8170 Hydraulic disc brake included in the shifter
DISC ROTOR	Shimano RT-CL800, 160mm front rear
RIM/WHEELSET	Velomann Palladium, 33mm profile, 700x21c, 24h, HG11 body, spoke pattern 2 to 1, tubeless-ready, set 1450 gr, sealed cartridge bearings
TIRE	Pirelli Cinturato™ Velo TLR 32mm (622-32), ArmourTech
STEM	Velomann, AL6061, fully internal cable routing stem, compatible with Acros AICR system Ext: 90mm (47), 100mm(50/53), 110mm(55/57), 120mm(59/61)
HANDLEBAR	Velomann Aero Compact handlebar full ICR, alloy diam. 31,8mm, reach 74mm, drop 116mm Size: 400mm-47~53cm, 420mm-55~57cm, 440-59"61cm
GRIP / TAPE	Bianchi Arrow premium tape, 2.5mm thickness, full black
SEATPOST	Velomann, custom D-shape, alloy shaft 2014, head alloy 6061, Setback 25mm L350mm =47~57cm; L380mm= 59~61cm
SADDLE	Velomann Mitora Lite 139 saddle, 139x250mm carbon rail 7x9,1mm

INFINITO ICR | 105 Di2 12SP | YTB18



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	2K: CK16 celeste glossy / black decals
FRAME	INFINITO carbon ICR - 1.5"- 1.5", Disc Brake, Mechanical/Electronic Di2, compatible with 32" tire, BBset pressfit 86,5x41, rear dropout 12 x 142mm thru axle sizes 47-50-53-55-57-59-61cm
HEADSET	Acros/FSA for ICR cable routing
FORK	Full Carbon ICR - 28" - 300mm - 1.5" , dropout 12 x 100mm thru axle
SHIFTER	'Shimano 105 Di2 hydraulic disc brake for road ST-R7170(L), ST-R7170 (R)
REAR DERAILLEUR	Shimano 105 Di2 12sp RD-R7150, 105 12-speed, max 36T
FRONT DERAILLEUR	Shimano 105 Di2 12sp ,FD-R7150, brazed-on type
CRANKSET	Shimano hollowtech 2, 170-172,5-175mm, 50x34T, Crank Length: 170mm-47/53cm, 172.5mm-55/59cm, 175-61cm
BOTTOM BRACKET	Shimano KSM-BB72-41B, press fit for road, right & left adapter, bearing, inner cover
CHAIN	Shimano CN-M7100, 12-speed
CASSETTE / FREEWHEEL	105 12sp 11-34T CS-R7100, 12-SPEED,11-12-13-14-15-17-19-21-24-27-30-34T

BRAKE	Shimano hydraulic disc brake
BRAKE LEVER	included
DISC ROTOR	Shimano SM-RT70, 160mm front rear
RIM/WHEELSET	Fulcrum Racing918 disc brake, 2 way fit, C19
TIRE	Vittoria Zaffiro V 700x28c, 26TPI, G2.0
STEM	Velomann Viper, Alloy 6061, raise - 7°, Oversize, 1 1/8" Ext: 90mm-47cm, 100mm-50'53cm, 110mm-55-57cm, 120mm-59-61cm
HANDLEBAR	Velomann Compact, Flat Top, alloy 6061 diam. 31,8mm, reach 80mm, drop 130mm Size: 400mm-47~53cm,420mm-55~57cm, 440mm-59~61cm
GRIP / TAPE	Bianchi cork, full bla
SEATPOST	Velomann, custom D-shape, alloy shaft 2014, head alloy 6061, Setback 25mm L350mm =47~57cm; L380mm= 59~61cm
SADDLE	Velomann VL-1966, steel rail, 250x148mm


INFINITO ICR | 105 12 SP | YTB17



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	2K: CK16 celeste glossy / black decals
FRAME	INFINITO carbon ICR - 1.5" - 1.5", Disc Brake, Mechanical/Electronic Di2, compatible with 32" tire, BBset pressfit 86,5x41, rear dropout 12 x 142mm thru axle sizes 47-50-53-55-57-59-61cm
HEADSET	Acros/FSA for ICR cable routing
FORK	Full Carbon ICR - 28" - 300mm - 1.5" , dropout 12 x 100mm thru axle
SHIFTER	105 hydraulic disc brake for road ST-R7120(L), ST-R7120 (R)
REAR DERAILLEUR	Shimano 105 12sp RD-R7100, 105 12-speed, max 36T
FRONT DERAILLEUR	Shimano 105 12sp FD-R7100, brazed-on type
CRANKSET	105 12sp FC-R7100, hollowtech 2, for rear 12- speed, 170-172,5-175mm, 50x34T Crank Length: 170mm-47-53cm, 172.5mm-55-59cm, 175-61cm
BOTTOM BRACKET	Shimano KSMBB7241B pressfit
CHAIN	Shimano CN-M6100, 12-speed

CASSETTE / FREEWHEEL	105 12sp 11-34T CS-R7100, 12-SPEED, 11-12-13-14-15-17-19-21-24-27-30-34T
BRAKE	Shimano BR-R7170 Hydraulic disc brake included in the shifter
DISC ROTOR	Shimano SM-RT70, 160mm front rear
RIM/WHEELSET	Fulcrum Racing918 disc brake, 2 way fit, C19
TIRE	Vittoria Zaffiro V 700x28c, 26TPI, G2.0
STEM	Velomann Viper, Alloy 6061, raise - 7°, Oversize, 1 1/8" Ext: 90mm-47cm, 100mm-50'53cm, 110mm-55-57cm, 120mm-59-61cm
HANDLEBAR	Velomann Compact, Flat Top, alloy 6061 diam. 31,8mm, reach 80mm, drop 130mm Size: 400mm-47-53cm, 420mm-55-57cm, 440mm-59-61cm
GRIP / TAPE	Bianchi cork, full black
SEATPOST	Velomann, custom D-shape, alloy shaft 2014, head alloy 6061, Setback 25mm L350mm =47>57cm; L380mm= 59>61cm
SADDLE	Velomann VL-1966, steel rail, 250x148mm

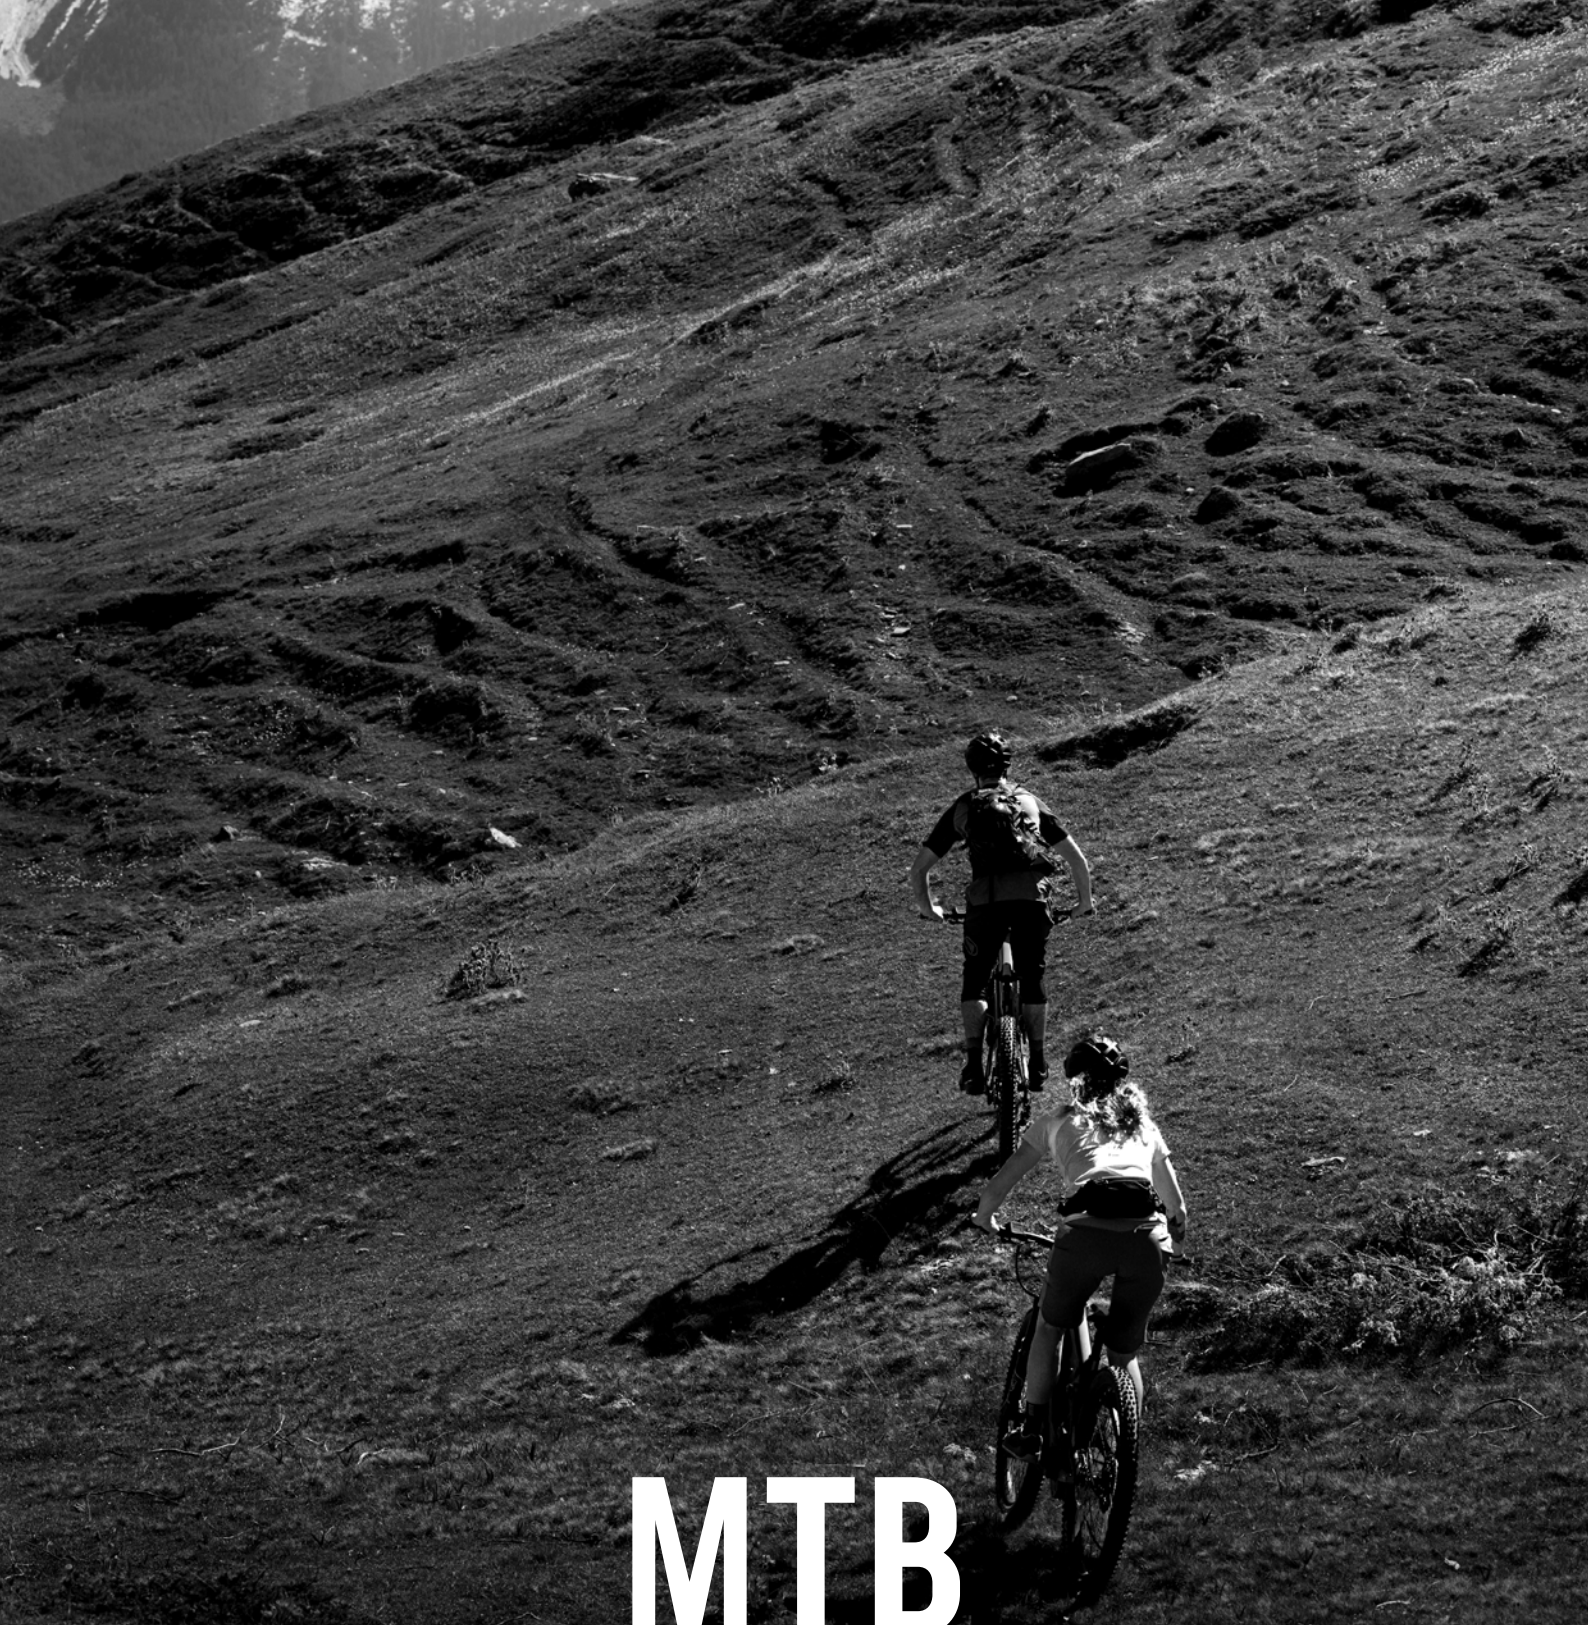

MTB

NEW

XR24 | TOURNEY 8SP | YTB7R



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLORS	"7X - Acid Yellow [Glossy]
	7U - CK16 [Glossy]
	8A - Carina - Silver [Glossy]
FRAME	Bianchi XR24, Aluminium, Disc Brake, for 24" wheels sizes 33
REAR SHOCK	-
FORK	Zoom Suspended fork for 24", 50mm travel
HEADSET	NECO Headset for 1-1/8"
STEM	Bianchi Stem alloy, lenght 50mm
HANDLEBAR	Bianchi Width 580mm, barebore 25.4mm, rise 16mm, backsweep 9°
GRIP / TAPE	Bianchi Rubber grips
SEAT CLAMP	Alloy 31.8
SEATPOST	SP-7019, 27.2mm, 0mm seatback

SADDLE	DDK Memory foam saddle
WHEELSET	Mach1 ER20 24", 32 holes
TIRE	Rubena Ocelot, 24x2.1", 54-507
SHIFTER	Shimano SL-M315, Tourney 8sp
REAR DERAILLEUR	Shimano RD-TY800, Tourney 8sp
CRANKSET	32T, lenght 152mm
CHAIN	KMC 8sp
CASSETTE / FREEWHEEL	Shimano CS-HG31, 8sp, 11-13-15-17-20-23-26-30T
BRAKE LEVER	Shimano BL-T4000 for mechanical disc brake
BRAKE	Shimano BR-TX80 mechanical disc brake, Tourney
FRONT DISK ROTOR	Shimano SM-RT10, 160 mm
REAR DISK ROTOR	Shimano SM-RT10, 160 mm

MAGMA 29S | CUES 9SP | YTBC8



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLORS	P4 - CK16 - Silver [Glossy]
	PE - Dark grey - Silver [Glossy]
	PF - Blue - Silver [Glossy]"
FRAME	Bianchi Magma 29, aluminium, OLD 9x135 QR, post mount sizes 43-48-53
REAR SHOCK	-
FORK	Suntour XCM32-NLO 29", 9x100 QR, 100 mm travel
HEADSET	FSA N.10 for external cable routing
STEM	Velomann ST92A
HANDLEBAR	Velomann MTB479A, Width: 720 mm, Barebore: 31.8 mm, Rise: 15 mm
GRIP / TAPE	T-One T-GP48B 130 mm
SEAT CLAMP	339QX, 31.8 mm
SEATPOST	Velomann SP-7019, Diameter 27.2 mm, 350 mm


SADDLE	Selle Royal SRX
WHEELSET	Mach1 6KLIXX 29, 622-32, 32 holes
TIRE	Kenda Booster 30 TPI, 29x2,2"
SHIFTER	Shimano CUES SL-U4000, 9sp
REAR DERAILLEUR	Shimano CUES RD-U4020, 9sp
CRANKSET	Shimano FC-U4000, 36x22T
CHAIN	Shimano CN-LG500, 10sp
CASSETTE / FREEWHEEL	Shimano CS-LG300, 9sp, 11-13-15-17-20-23-26-30-36T
BRAKE LEVER	Shimano BL-MT200
BRAKE	Shimano MT-200, 2 pistons, mineral oil
FRONT DISK ROTOR	Shimano SM-RT10, 160 mm
REAR DISK ROTOR	Shimano SM-RT10, 160 mm



GRAVEL


RACING | ADVENTURE

IMPULSO RC | IMPULSO PRO | IMPULSO COMP

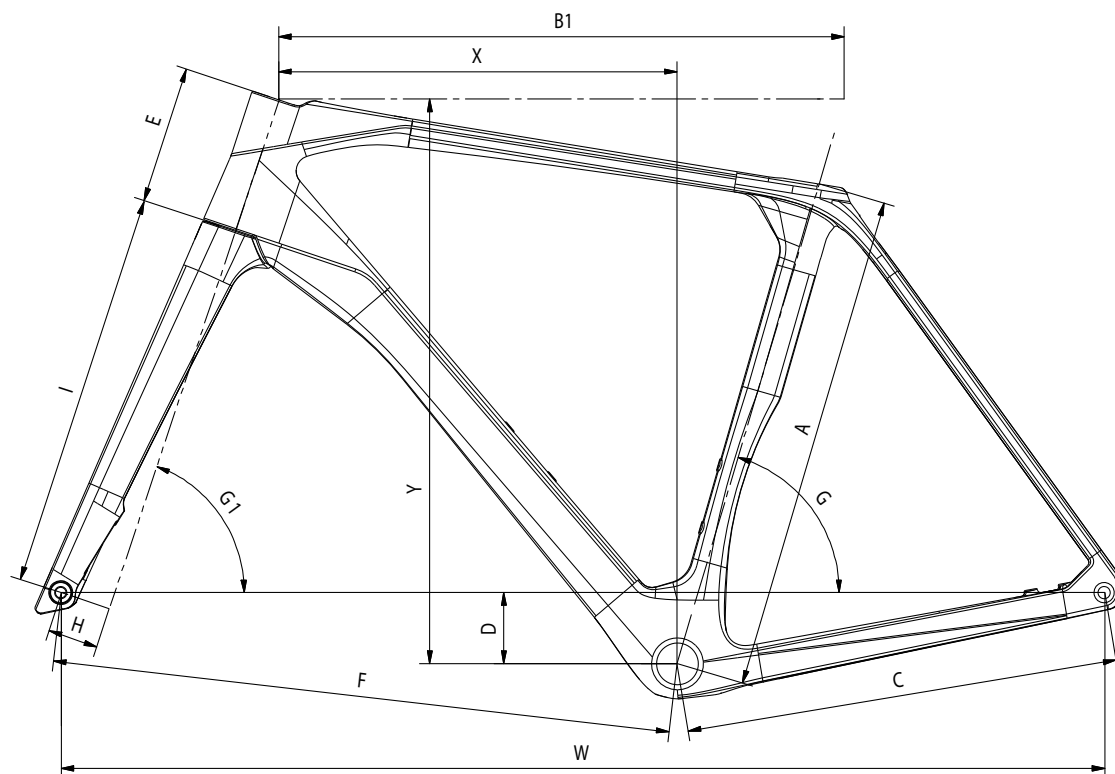

Impulso RC / Impulso PRO / Impulso COMP													
SIZE	A	B1	C	D	E	F	G	G1	H	I	X	Y	W
XS	410	515	425	70	100	592	75°	70,5°	50	391	376	517	1007
SM	450	526	425	70	118	600	74,5°	70,5°	50	391	378	534	1014
MD	490	550	425	70	135	610	74°	71,5°	50	391	391	554	1025
LG	520	572	426	70	162	628	73,5°	71,5°	50	391	401	580	1045
XL	550	600	428	70	190	645	73°	72°	50	391	414	608	1064

IMPULSO RC INTEGRATED HANDLEBAR

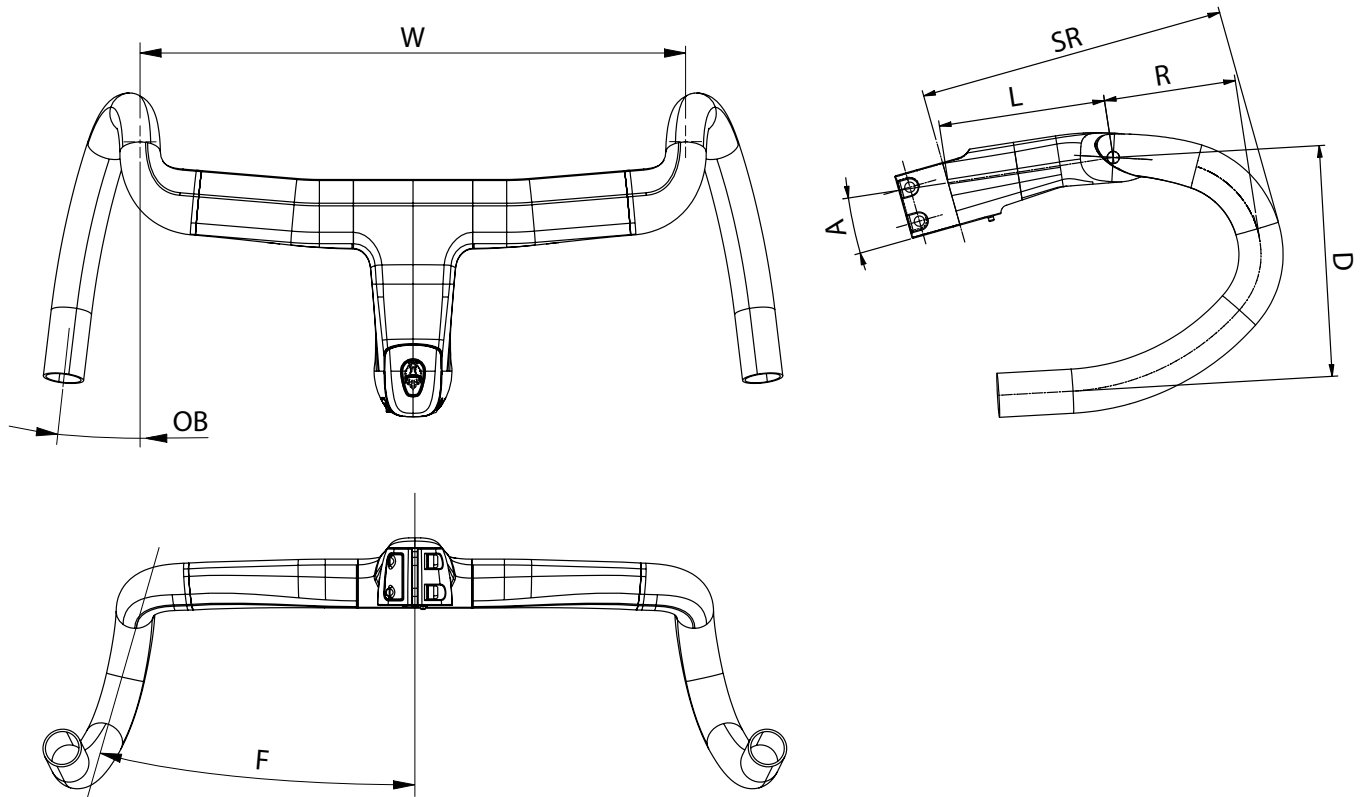

Impulso RC Integrated Handlebar								
Size	Width (W)	Lenght (L)	Reach (R)	Drop (D)	Stem/HB reach (SR)	Outward bend (OB)	Flare (F)	Angle (A)
90x400	400	90	72,6	119,3	167	6,8°	16°	-7°
90x420	420	90	72,6	119,3	167	6,8°	16°	-7°
100x400	400	100	72,6	119,3	177	6,8°	16°	-7°
100x420	420	100	72,6	119,3	177	6,8°	16°	-7°
110x400	400	110	72,6	119,3	187	6,8°	16°	-7°
110x420	420	110	72,6	119,3	187	6,8°	16°	-7°
110x440	440	110	72,6	119,3	187	6,8°	16°	-7°
120x420	420	120	72,6	119,3	197	6,8°	16°	-7°
120x440	440	120	72,6	119,3	197	6,8°	16°	-7°

IMPULSO RC | FORCE AXS DISC 2X12S P | YTB84



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	FG - Celeste Metallic/graphite/CK16
FRAME	IMPULSO RC Disc Brake Specification: Flat Mount 140/160 Bottom Bracket Standard: PressFit 86.5 X Ø41 Rear Axle: thru12 OLD (Over-Locknut-Dimension): 142 mm Front Derailleur: Brazed-on Type Rear Derailleur: SRAM UDH Hanger type Max Chainring Compatibility: 46T-52T (Shimano) - 43T-48T (SRAM) Tire Clearance: ETRTO 622-42mm Material: Epoxy - HM-HS Carbon Fiber Composite
HEADSET	Bianchi Custom Acros ICR (Internal Cable Routing) Spacers: 5 mm x1, 10mm x3 Headtube Cover: Bianchi Custom Compression Ring: 1.125 Inch Top Bearing: Angular contact Bearing 42x52x7 + seal Bottom Bearing: Angular contact Bearing 40x52x7 + seal
FORK	Bianchi Impulso Integrated Fork Disc Brake Specification: Flat Mount 140/160 Front Axle: thru12 OLD (Over-Locknut-Dimension): 100 mm Tire Clearance: ETRTO 622-42mm Steer tube Diameter: 1 1/8 Material: Epoxy - HM-HS Carbon Fiber Composite
SHIFTER	Sram Force AXS HRD Shift System
FRONT DERAILLEUR	Sram Force AXS
REAR DERAILLEUR	Sram Force AXS
CRANKSET	Sram Force 46/33T Crank Length: 170mm-XS(47)-SM(51), 172.5mm-MD(55)-LG(58), 175mm-XL(61)

BOTTOM BRACKET	Sram DUB PressFit Road 86.5 X Ø41
CHAIN	Sram Force Flattop, PowerLock D1
CASSETTE / FREEWHEEL	Sram Force XG-1270, 10-36T Driver Body Interface: XDR
BRAKE	Sram Force Pad Type: Steel-Backed Organic
DISC ROTOR	Sram Paceline Rotor Hub Interface: Centerlock Rotor Diameter: 160 mm (front&Rear)
WHEELSET	REPARTO CORSE 43 Ceramitech, 43 mm profile, 700x25C, 24h, XDR body
TIRE	Pirelli Cinturato Gravel RC, 700 x 40c, 60TPI- TLR, Folding, Tan sidewall
HANDLEBAR	Reparto Corse AeroFlare Flare: 16° Drop: 120mm Reach 80mm Steerer Interface Diameter: 1 1/8 HandleBar Sizes: 90/400 (SX(47)) ; 100/400 (SM(51)); 110/420 (MD(55)-LG(58)); 120/440(XL(61)) Material: Epoxy - HM-HS Carbon Fiber Composite
TAPE	La Spirale Ribbon cork
SEATPOST	Bianchi Custom D-Shape Offset: 20mm Back Seatpost lengths: 300mm-SX(47), 350mm- SM(51) MD(55), 380mm-LG(58) XL(61) Material: Epoxy - HM-HS Carbon Fiber Composite
SADDLE	Reparto Corse Rc139Carbon, full carbon open flow, width 139mm Length 250mm

IMPULSO RC | GRX 825 DI2 2X12SP | YUB81



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	FG - Celeste Metallic/graphite/CK16
FRAME	IMPULSO RC Disc Brake Specification: Flat Mount 140/160 Bottom Bracket Standard: PressFit 86.5 X diam.41 Rear Axle: thru12 OLD (Over-Locknut-Dimension): 142 mm Max Chainring Compatibility: 46T-52T (Shimano) - 43T-48T (SRAM) Tire Clearance: ETRTO 622-42mm Material: HM-HS Carbon Fiber Composite
HEADSET	Bianchi Custom Acros ICR (Internal Cable Routing)
FORK	Bianchi Impulso Integrated Fork Disc Brake Specification: Flat Mount 140/160 Front Axle: thru12 OLD (Over-Locknut-Dimension): 100 mm Tire Clearance: ETRTO 622-42mm Steer tube Diameter: 1 1/8" Material: HM-HS Carbon Fiber Composite
SHIFTER	Shimano GRX, ST-RX825
FRONT DERAILLEUR	Shimano GRX FD-RX825
REAR DERAILLEUR	Shimano GRX RD-RX825
CRANKSET	Shimano GRX 820 FC-RX820 48-31T. 4iiii Precision 3, single side powermeter. Crank Length: 170mm-XS(47)-SM(51), 172.5mm-MD(55)-LG(58), 175mm-XL(61)
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit
CHAIN	Shimano CN-M7100

CASSETTE / FREEWHEEL	Shimano CS-HG710-12 speed, 11-36T Driver body Interface: HG11
BRAKE	Shimano Hydraulic Brake, BR-RX820
DISC ROTOR	Shimano RT-CL800 IceTech Hub Interface: Centerlock Rotor Diameter: 160 mm (front&rear)
WHEELSET	Reparto Corse 43G Ceramitech
TIRE	Pirelli Cinturato Gravel RC, 700 x 40c, 60TPI- TLR, Folding, Tan sidewall
HANDLEBAR	Reparto Corse AeroFlare Flare: 16° Drop: 120mm Reach 80mm Steerer Interface Diameter: 1 1/8" HandleBar Sizes: 90/400-SX(47) ; 100/400-SM(51); 110/420-MD(55)-LG(58); 120/440-XL(61) Material: HM-HS Carbon Fiber Composite
TAPE	Bianchi Arrow 2.5mm thickness, full black
SEATPOST	Bianchi Custom D-Shape Offset: 20mm Back Seatpost lengths: 300mm-SX(47), 350mm- SM(51) MD(55), 380mm-LG(58) XL(61) Material: HM-HS Carbon Fiber Composite
SADDLE	Bianchi RC139 carbon

IMPULSO PRO | GRX 820 DISC 2 X 12 SP | YTB83



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	F1 - CK16/graphite matt F4 - grey/black matt
FRAME	IMPULSO PRO Disc Brake Specification: Flat Mount 140/160 Bottom Bracket Standard: PressFit 86.5 X diam.41 Rear Axle: thru12 OLD (Over-Locknut-Dimension): 142 mm Front Derailleur: Braze-on Type Rear Derailleur: SRAM UDH Hanger type Max Chaining Compatibility: 46T-52T (Shimano) - 43T-48T (SRAM) Tire Clearance: ETRTO 622-42mm Material: Carbon Fiber Composite
HEADSET	Bianchi Custom Acros ICR (Internal Cable Routing)
FORK	Bianchi Impulso Integrated Fork Disc Brake Specification: Flat Mount 140/160 Front Axle: thru12 OLD (Over-Locknut-Dimension): 100 mm Tire Clearance: ETRTO 622-42mm Steer tube Diameter: 1 1/8 Material: Carbon Fiber Composite
SHIFTER	Shimano GRX 820 ST-RX820
FRONT DERAILLEUR	Shimano GRX 820 FD-RX820
REAR DERAILLEUR	Shimano GRX 820 RD-RX820 Maximum Cassette Sprocket 36T
CRANKSET	Shimano GRX 820 FC-RX820 48-31T Crank Length: 170mm-XS(47)-SM(51), 172.5mm-MD(55)-LG(58), 175mm-XL(61)
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit
CHAIN	Shimano CN-M7100
CASSETTE / FREEWHEEL	Shimano CS-HG710-12 speed, 11-36T Driver body Interface: HG11

BRAKE	Shimano Hydraulic Brake, BR-RX820
DISC ROTOR	Shimano RT-CL800 IceTech Hub Interface: Centerlock Rotor Diameter: 160 mm (front&Rear)
WHEELSET	Velomann Terbium clincher and tubeless ready Rim Diameter: 700C Material: Carbon Rim Height: 30 mm Inner Width Channel: 25 mm
TIRE	Pirelli Cinturato™ GRAVEL H Classic, 40-622 tan sidewall
STEM	Velomann AICR Alloy Rise: -2° Steerer Diameter: 1-1/8 (28.6mm) HB interface Diameter: 1-1/4 (31.8mm) Stem Lengths: 80mm - XS(47), 90mm - SM(51), 100mm-MD(55), 110mm-LG(58), 120m -XL(61)
HANDLEBAR	Velomann Gravel ICR Alloy Flare: 16° Drop: 130mm Reach 70mm Interface Diameter: 1 1/4 (31.8mm) HandleBar Widths: 400 - SX(47) SM(51), 420 - MD(55) LG(58), 440 -XL(61)
TAPE	Bianchi Hexagon tape: 2.5mm thickness, Full black
SEATPOST	Bianchi Custom D-Shape Offset: 20mm Back Seatpost lengths: 300mm-SX(47), 350mm- SM(51) MD(55), 380mm-LG(58) XL(61) Material: Epoxy - HM-HS Carbon Fiber Composite
SADDLE	Velomann MITORA 149 Hyper

IMPULSO PRO | GRX 820 DISC 2 X 12 SP | YTB83



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	F1 - CK16/graphite matt F4 - grey/black matt
FRAME	IMPULSO PRO Disc Brake Specification: Flat Mount 140/160 Bottom Bracket Standard: PressFit 86.5 X diam.41 Rear Axle: thru12 OLD (Over-Locknut-Dimension): 142 mm Front Derailleur: Brazed-on Type Rear Derailleur: SRAM UDH Hanger type Max Chaining Compatibility: 46T-52T (Shimano) - 43T-48T (SRAM) Tire Clearance: ETRTO 622-42mm Material: Carbon Fiber Composite
HEADSET	Bianchi Custom Acros ICR (Internal Cable Routing)
FORK	Bianchi Impulso Integrated Fork Disc Brake Specification: Flat Mount 140/160 Front Axle: thru12 OLD (Over-Locknut-Dimension): 100 mm Tire Clearance: ETRTO 622-42mm Steer tube Diameter: 1 1/8 Material: Carbon Fiber Composite
SHIFTER	Shimano GRX 820 ST-RX820
FRONT DERAILLEUR	Shimano GRX 820 FD-RX820
REAR DERAILLEUR	Shimano GRX 820 RD-RX820 Maximum Cassette Sprocket 36T
CRANKSET	Shimano GRX 820 FC-RX820 48-31T Crank Length: 170mm-XS(47)-SM(51), 172.5mm-MD(55)-LG(58), 175mm-XL(61)
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit
CHAIN	Shimano CN-M7100
CASSETTE / FREEWHEEL	Shimano CS-HG710-12 speed, 11-36T Driver body Interface: HG11

BRAKE	Shimano Hydraulic Brake, BR-RX820
DISC ROTOR	Shimano RT-CL800 IceTech Hub Interface: Centerlock Rotor Diameter: 160 mm (front&Rear)
WHEELSET	Velomann Terbium clincher and tubeless ready Rim Diameter: 700C Material: Carbon Rim Height: 30 mm Inner Wigth Channel: 25 mm
TIRE	Pirelli Cinturato™ GRAVEL H Classic, 40-622 tan sidewall
STEM	Velomann AICR Alloy Rise: -2° Steerer Diameter: 1-1/8 (28.6mm) HB interface Diameter: 1-1/4 (31.8mm) Stem Lengths: 80mm - XS(47), 90mm - SM(51), 100mm-MD(55), 110mm-LG(58),120m -XL(61)
HANDLEBAR	Velomann Gravel ICR Alloy Flare: 16° Drop: 130mm Reach 70mm Interface Diameter: 1 1/4 (31.8mm) HandleBar Widths: 400 - SX(47) SM(51), 420 - MD(55) LG(58), 440 -XL(61)
TAPE	Bianchi Hexagon tape: 2.5mm thickness, Full black
SEATPOST	Bianchi Custom D-Shape Offset: 20mm Back Seatpost lengths: 300mm-SX(47), 350mm- SM(51) MD(55), 380mm-LG(58) XL(61) Material: Epoxy - HM-HS Carbon Fiber Composite
SADDLE	Velomann MITORA 149 Hyper

IMPULSO COMP | GRX 610 DISC 2X 12SP | YTB86



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	F7 - Ck16 / graphite Glossy F8 - terra/black Glossy
FRAME	IMPULSO Comp Disc Brake Specification: Flat Mount 140/160 Bottom Bracket Standard: PressFit 86.5 X diam.41 Rear Axle: thru12 OLD (Over-Locknut-Dimension): 142 mm Front Derailleur: Brazed-on Type Rear Derailleur: SRAM UDH Hanger type Max Chaining Compatibility: 46T-52T (Shimano) - 43T-48T (SRAM) Tire Clearance: ETRTO 622-42mm Material: Carbon Fiber Composite
HEADSET	Bianchi Custom Acros ICR (Internal Cable Routing)
FORK	Bianchi Impulso Integrated Fork Disc Brake Specification: Flat Mount 140/160 Front Axle: thru12 OLD (Over-Locknut-Dimension): 100 mm Tire Clearance: ETRTO 622-42mm Steer tube Diameter: 1 1/8 Material: Carbon Fiber Composite
SHIFTER	Shimano GRX 610 ST-RX610
FRONT DERAILLEUR	Shimano GRX 820 FD-RX820
REAR DERAILLEUR	Shimano GRX 820 RD-RX820 Maximum Cassette Sprocket 36T
CRANKSET	Shimano GRX 610 FC-RX610 46-30T Crank Length: 170mm-XS(47)-SM(51), 172.5mm-MD(55)-LG(58), 175mm-XL(61)
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit
CHAIN	Shimano CN-M7100
CASSETTE / FREEWHEEL	Shimano CS-HG710-12 speed, 11-36T Driver body Interface: HG11

BRAKE	Shimano Hydraulic Brake, BR-RX400
DISC ROTOR	Shimano SM-RT70 IceTech Hub Interface: Centerlock Rotor Diameter: 160 mm (front&Rear)
WHEELSET	Fulcrum RapidRed 900 2-Way Fit Ready (for clincher and tubeless ready) Rim Diameter: 700C Material: Aluminum Alloy Rim Height: 24 mm Inner Wigth Channel: 22 mm
TIRE	Pirelli Cinturato™ GRAVEL M Classic, 45-622 tan sidewall
STEM	Velomann AICR Alloy Rise: -2° Steerer Diameter: 1-1/8 (28.6mm) HB interface Diameter: 1-1/4 (31.8mm) Stem Lengths: 80mm - XS(47), 90mm - SM(51), 100mm-MD(55), 110mm-LG(58),120m -XL(61)
HANDLEBAR	Velomann Gravel ICR Alloy Flare: 16° Drop: 130mm Reach 70mm Interface Diameter: 1 1/4 (31.8mm) HandleBar Widths: 400 - SX(47) SM(51), 420 - MD(55) LG(58), 440 -XL(61)
TAPE	Bianchi Hexagon tape: 2.5mm thickness, Full black
SEATPOST	Bianchi Custom D-Shape Offset: 20mm Back Seatpost lengths: 300mm-SX(47), 350mm- SM(51) MD(55), 380mm-LG(58) XL(61) Material: Epoxy - HM-HS Carbon Fiber Composite
SADDLE	Velomann MITORA 149 H2, cover: soft touch, padding: foam, shell: nylon carbon, rails: Steel, lenght: 250mm, width: 149mm

IMPULSO COMP | GRX 610 DISC 2X 12SP | YTB86



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	F7 - Ck16 / graphite Glossy F8 - terra/black Glossy
FRAME	IMPULSO Comp Disc Brake Specification: Flat Mount 140/160 Bottom Bracket Standard: PressFit 86.5 X diam.41 Rear Axle: thru12 OLD (Over-Locknut-Dimension): 142 mm Front Derailleur: Brazed-on Type Rear Derailleur: SRAM UDH Hanger type Max Chaining Compatibility: 46T-52T (Shimano) - 43T-48T (SRAM) Tire Clearance: ETRTO 622-42mm Material: Carbon Fiber Composite
HEADSET	Bianchi Custom Acros ICR (Internal Cable Routing)
FORK	Bianchi Impulso Integrated Fork Disc Brake Specification: Flat Mount 140/160 Front Axle: thru12 OLD (Over-Locknut-Dimension): 100 mm Tire Clearance: ETRTO 622-42mm Steer tube Diameter: 1 1/8 Material: Carbon Fiber Composite
SHIFTER	Shimano GRX 610 ST-RX610
FRONT DERAILLEUR	Shimano GRX 820 FD-RX820
REAR DERAILLEUR	Shimano GRX 820 RD-RX820 Maximum Cassette Sprocket 36T
CRANKSET	Shimano GRX 610 FC-RX610 46-30T Crank Length: 170mm-XS(47)-SM(51), 172.5mm-MD(55)-LG(58), 175mm-XL(61)
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit
CHAIN	Shimano CN-M7100
CASSETTE / FREEWHEEL	Shimano CS-HG710-12 speed, 11-36T Driver body Interface: HG11

BRAKE	Shimano Hydraulic Brake, BR-RX400
DISC ROTOR	Shimano SM-RT70 IceTech Hub Interface: Centerlock Rotor Diameter: 160 mm (front&Rear)
WHEELSET	Fulcrum RapidRed 900 2-Way Fit Ready (for clincher and tubeless ready) Rim Diameter: 700C Material: Aluminum Alloy Rim Height: 24 mm Inner Wigth Channel: 22 mm
TIRE	Pirelli Cinturato™ GRAVEL M Classic, 45-622 tan sidewall
STEM	Velomann AICR Alloy Rise: -2° Steerer Diameter: 1-1/8 (28.6mm) HB interface Diameter: 1-1/4 (31.8mm) Stem Lengths: 80mm - XS(47), 90mm - SM(51), 100mm-MD(55), 110mm-LG(58),120m -XL(61)
HANDLEBAR	Velomann Gravel ICR Alloy Flare: 16° Drop: 130mm Reach 70mm Interface Diameter: 1 1/4 (31.8mm) HandleBar Widths: 400 - SX(47) SM(51), 420 - MD(55) LG(58), 440 -XL(61)
TAPE	Bianchi Hexagon tape: 2.5mm thickness, Full black
SEATPOST	Bianchi Custom D-Shape Offset: 20mm Back Seatpost lengths: 300mm-SX(47), 350mm- SM(51) MD(55), 380mm-LG(58) XL(61) Material: Epoxy - HM-HS Carbon Fiber Composite
SADDLE	Velomann MITORA 149 H2, cover: soft touch, padding: foam, shell: nylon carbon, rails: Steel, lenght: 250mm, width: 149mm

ARCADEX PRO | APEX/GX AXS DISC 1X12SP | YTB82



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	AF - CK16 / Green water - Matt AW - Forest Green / Graphite - Matt
FRAME	Arcadex PRO Disc Brake Specification: Flat Mount 140/160 Bottom Bracket Standard: PressFit 86.5 X Ø41 Rear Axle: thru12 OLD (Over-Locknut-Dimension): 142 mm Front Derailleur: Non Compatible Rear Derailleur: SRAM UDH Hanger type Max Chainring Compatibility: 38T-44T Minimum Chainline: 45.5 mm Tire Clearance: ETRTO 622-50 mm SeatPost O.D: Ø27.2 mm Material: Epoxy - SM Carbon Fiber Composite
HEADSET	Bianchi Custom Acros ICR (Internal Cable Routing) Spacers: 5 mm x1, 10 mm x3 Headtube Cover: Bianchi Custom Compression Ring: 1.125 Inch Top Bearing: Angular contact Bearing 42x52x7 + seal Bottom Bearing: Angular contact Bearing 40x52x7 + seal Base Plate with seal, Steerer 1.5" (39.78 mm)
FORK	Suspension Fork: RockShox Rudy XPLR Travel: 30 mm Disc Brake Specification: Direct Flat Mount 160/180 Front Axle: thru12 OLD (Over-Locknut-Dimension): 100 mm Tire Clearance: ETRTO 622-50 mm Steer tube Diameter: Tapered 1 1/8" to 1.5" Fork Rake: 51 mm
SHIFTER	Sram Apex AXS HRD Shift System
REAR DERAILLEUR	Sram GX Eagle Transmission (T-type AXS)
CRANKSET	Sram Rival 1 WIDE 40T Crank Length: 170 mm-XS(47)-SM(51), 172.5 mm-MD(55)-LG(58), 175 mm-XL(61)
BOTTOM BRACKET	Sram DUB PressFit Road Wide 86.5 X Ø41

CHAIN	Sram GX Eagle Transmission Flattop
CASSETTE / FREEWHEEL	Sram GX Eagle Transmission, XS 1272 T-Type, 10-52T Driver Body Interface: XD
BRAKE	Sram APEX Pad Type: Steel-Backed Organic
DISC ROTOR	Sram CenterLine Rotor Hub Interface: Centerlock Rotor Diameter: 160 mm (front&rear)
WHEELSET	Velomann Terbiu clincher and tubeless ready Rim Diameter: 700C Material: Carbon Rim Height: 30 mm Inner Width Channel: 25 mm
TIRE	Pirelli Cinturato™ GRAVEL M Classic, 45-622 tan sidewall
STEM	Velomann AICR Alloy Rise: -2° Steerer Diameter: 1-1/8" (28.6 mm) HB interface Diameter: 1-1/4" (31.8 mm) Stem Lengths: 80 mm - XS(47), 90 mm - SM(51), 100 mm-MD(55), 110 mm-LG(58), 120 mm-XL(61)
HANDLEBAR	Velomann Gravel ICR Alloy Flare: 16° Drop: 130 mm Reach 70 mm Interface Diameter: 1 1/4" (31.8 mm) HandleBar Widths: 400 - SX(47) SM(51), 420 - MD(55) LG(58), 440 -XL(61)
TAPE	Bianchi Hexagon tape 2.5 mm thickness, Full black
SEATPOST	Velomann Carbon UD SeatPost O.D: Ø27.2 mm Seatpost lengths: 300 mm-SX(47), 350 mm-SM(51) MD(55), 400mm-LG(58) XL(61)"
SADDLE	Velomann MITORA 149 HI cover: soft touch padding: foam shell: nylon carbon rails: Aisi Steel length: 250 mm width: 149 mm weight: 230g ± 2"

ARCADEX PRO | APEX/GX AXS DISC 1X12SP | YTB82



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	AF - CK16 / Green water - Matt AW - Forest Green / Graphite - Matt
FRAME	Arcadex PRO Disc Brake Specification: Flat Mount 140/160 Bottom Braket Standard: PressFit 86.5 X Ø41 Rear Axle: thru12 OLD (Over-Locknut-Dimension): 142 mm Front Derailleur: Non Compatible Rear Derailleur: SRAM UDH Hanger type Max Chainring Compatibility: 38T-44T Minimun Chainline: 45.5 mm Tire Clearance: ETRTO 622-50 mm SeatPost O.D: Ø27.2 mm Material: Epoxy - SM Carbon Fiber Composite
HEADSET	Bianchi Custom Acros ICR (Internal Cable Rounting) Spacers: 5 mm x1, 10 mm x3 Headtube Cover: Bianchi Costum Compresion Ring: 1.125 Inch Top Bearing: Angular contact Bearing 42x52x7 + seal Bottom Bearing: Angular contact Bearing 40x52x7 + seal Base Plate with seal, Steerer 1.5" (39.78 mm)
FORK	Suspension Fork: RockShox Rudy XPLR Travel: 30 mm Disc Brake Specification: Direct Flat Mount 160/180 Front Axle: thru12 OLD (Over-Locknut-Dimension): 100 mm Tire Clearance: ETRTO 622-50 mm Steer tube Diameter: Tapered 1 1/8" to 1.5" Fork Rake: 51 mm
SHIFTER	Sram Apex AXS HRD Shift System
REAR DERAILLEUR	Sram GX Eagle Transmission (T-type AXS)
CRANKSET	Sram Rival 1 WIDE 40T Crank Length: 170 mm-XS(47)-SM(51), 172.5 mm-MD(55)-LG(58), 175 mm-XL(61)
BOTTOM BRACKET	Sram DUB PressFit Road Wide 86.5 X Ø41

CHAIN	Sram GX Eagle Transmission Flattop
CASSETTE / FREEWHEEL	Sram GX Eagle Transmission, XS 1272 T-Type, 10-52T Driver Body Interface: XD
BRAKE	Sram APEX Pad Type: Steel-Backed Organic
DISC ROTOR	Sram CenterLine Rotor Hub Interface: Centerlock Rotor Diameter: 160 mm (front&Rear)
WHEELSET	Velomann TerbiuM clincher and tubeless ready Rim Diameter: 700C Material: Carbon Rim Height: 30 mm Inner Wigth Channel: 25 mm
TIRE	Pirelli Cinturato™ GRAVEL M Classic, 45-622 tan sidewall
STEM	Velomann AICR Alloy Rise: -2° Steerer Diameter: 1-1/8" (28.6 mm) HB interface Diameter: 1-1/4" (31.8 mm) Stem Lengths: 80 mm - XS(47), 90 mm - SM(51), 100 mm-MD(55), 110 mm-LG(58),120 m -XL(61)
HANDLEBAR	Velomann Gravel ICR Alloy Flare: 16° Drop: 130 mm Reach 70 mm Interface Diameter: 1 1/4" (31.8 mm) HandleBar Widths: 400 - SX(47) SM(51), 420 - MD(55) LG(58), 440 -XL(61)
TAPE	Bianchi Hexagon tape 2.5 mm thickness, Full black
SEATPOST	Velomann Carbon UD SeatPost O.D: Ø27.2 mm Seatpost lengths: 300 mm-SX(47), 350 mm-SM(51) MD(55), 400mm-LG(58) XL(61)"
SADDLE	Velomann MITORA 149 HI cover: soft touch padding: foam shell: nylon carbon rails: Aisi Steel lenght: 250 mm width: 149 mm weight: 230g ± 2"

ARCADEX PRO | G R X 820/822 D I S C 1 X 12 S P | YTB85



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	AF - CK16 / Green water - Matt AW - Forest Green / Graphite - Matt
FRAME	Arcadex PRO Disc Brake Specification: Flat Mount 140/160 Bottom Bracket Standard: PressFit 86.5 X Ø41 Rear Axle: thru12 OLD (Over-Locknut-Dimension): 142 mm Front Derailleur: Non Compatible Rear Derailleur: SRAM UDH Hanger type Max Chainring Compatibility: 38T-44T Minimum Chainline: 45.5 mm Tire Clearance: ETRTO 622-50 mm SeatPost O.D: Ø27.2 mm Material: Epoxy - SM Carbon Fiber Composite
HEADSET	Bianchi Custom Acros ICR (Internal Cable Routing) Spacers: 5 mm x1, 10 mm x3 Headtube Cover: Bianchi Custom Compression Ring: 1.125 Inch Top Bearing: Angular contact Bearing 42x52x7 + seal Bottom Bearing: Angular contact Bearing 40x52x7 + seal
FORK	Bianchi Arcadex Fork Disc Brake Specification: Flat Mount 140/160 Front Axle: thru12 OLD (Over-Locknut-Dimension): 100 mm Tire Clearance: ETRTO 622-50 mm Steer tube Diameter: 1 1/8" Material: Epoxy - SM Carbon Fiber Composite
SHIFTER	Shimano GRX 820 ST/BL-RX820
REAR DERAILLEUR	Shimano GRX 822 RD-RX822, SGS Maximum Cassette Sprocket 51T
CRANKSET	Shimano GRX 820 FC-RX820-1,40T Crank Length: 170 mm-XS(47)-SM(51), 172.5 mm-MD(55)-LG(58), 175 mm-XL(61)
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit

CHAIN	Shimano CN-M7100
CASSETTE / FREEWHEEL	Shimano CS-M7100-12 speed, 11-51T Driver body Interface: MicroSpline
BRAKE	Shimano Hydraulic Brake, BR-RX820
DISC ROTOR	Shimano SM-RT70 IceTech Hub Interface: Centerlock Rotor Diameter: 160 mm (front&rear)
WHEELSET	Velomann Terbiu clincher and tubeless ready Rim Diameter: 700C Material: Carbon Rim Height: 30 mm Inner Width Channel: 25 mm
TIRE	Pirelli Cinturato™ GRAVEL M Classic, 45-622 tan sidewall
STEM	Velomann AICR Alloy Rise: -2° Steerer Diameter: 1-1/8" (28.6 mm) HB interface Diameter: 1-1/4" (31.8 mm) Stem Lengths: 80 mm-XS(47), 90 mm-SM(51), 100 mm-MD(55), 110 mm-LG(58), 120 mm-XL(61)
HANDLEBAR	Velomann Gravel ICR Alloy Flare: 16° Drop: 130 mm Reach 70 mm Interface Diameter: 1 1/4" (31.8 mm) HandleBar Widths: 400 - SX(47) SM(51), 420 - MD(55) LG(58), 440 -XL(61)
TAPE	Bianchi Hexagon tape 2.5 mm thickness, Full black
SEATPOST	Velomann Carbon UD SeatPost O.D: Ø27.2 mm Seatpost lengths: 300 mm-SX(47), 350 mm- SM(51) MD(55), 400 mm-LG(58) XL(61)
SADDLE	Velomann MITORA 149 H1 cover: soft touch padding: foam shell: nylon carbon rails: Aisi Steel length: 250 mm width: 149 mm weight: 230g ± 2

ARCADEX PRO | G R X 820/822 D I S C 1 X 12 S P | YTB85



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	AF - CK16 / Green water - Matt AW - Forest Green / Graphite - Matt
FRAME	Arcadex PRO Disc Brake Specification: Flat Mount 140/160 Bottom Bracket Standard: PressFit 86.5 X Ø41 Rear Axle: thru12 OLD (Over-Locknut-Dimension): 142 mm Front Derailleur: Non Compatible Rear Derailleur: SRAM UDH Hanger type Max Chainring Compatibility: 38T-44T Minimum Chainline: 45.5 mm Tire Clearance: ETRTO 622-50 mm SeatPost O.D: Ø27.2 mm Material: Epoxy - SM Carbon Fiber Composite
HEADSET	Bianchi Custom Acros ICR (Internal Cable Routing) Spacers: 5 mm x1, 10 mm x3 Headtube Cover: Bianchi Custom Compression Ring: 1.125 Inch Top Bearing: Angular contact Bearing 42x52x7 + seal Bottom Bearing: Angular contact Bearing 40x52x7 + seal
FORK	Bianchi Arcadex Fork Disc Brake Specification: Flat Mount 140/160 Front Axle: thru12 OLD (Over-Locknut-Dimension): 100 mm Tire Clearance: ETRTO 622-50 mm Steer tube Diameter: 1 1/8" Material: Epoxy - SM Carbon Fiber Composite
SHIFTER	Shimano GRX 820 ST/BL-RX820
REAR DERAILLEUR	Shimano GRX 822 RD-RX822, SGS Maximum Cassette Sprocket 51T
CRANKSET	Shimano GRX 820 FC-RX820-1,40T Crank Length: 170 mm-XS(47)-SM(51), 172.5 mm-MD(55)-LG(58), 175 mm-XL(61)
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit

CHAIN	Shimano CN-M7100
CASSETTE / FREEWHEEL	Shimano CS-M7100-12 speed, 11-51T Driver body Interface: MicroSpline
BRAKE	Shimano Hydraulic Brake, BR-RX820
DISC ROTOR	Shimano SM-RT70 IceTech Hub Interface: Centerlock Rotor Diameter: 160 mm (front&rear)
WHEELSET	Velomann Terbium clincher and tubeless ready Rim Diameter: 700C Material: Carbon Rim Height: 30 mm Inner Width Channel: 25 mm
TIRE	Pirelli Cinturato™ GRAVEL M Classic, 45-622 tan sidewall
STEM	Velomann AICR Alloy Rise: -2° Steerer Diameter: 1-1/8" (28.6 mm) HB interface Diameter: 1-1/4" (31.8 mm) Stem Lengths: 80 mm-XS(47), 90 mm-SM(51), 100 mm-MD(55), 110 mm-LG(58), 120 mm-XL(61)
HANDLEBAR	Velomann Gravel ICR Alloy Flare: 16° Drop: 130 mm Reach 70 mm Interface Diameter: 1 1/4" (31.8 mm) HandleBar Widths: 400 - SX(47) SM(51), 420 - MD(55) LG(58), 440 -XL(61)
TAPE	Bianchi Hexagon tape 2.5 mm thickness, Full black
SEATPOST	Velomann Carbon UD SeatPost O.D: Ø27.2 mm Seatpost lengths: 300 mm-SX(47), 350 mm- SM(51) MD(55), 400 mm-LG(58) XL(61)
SADDLE	Velomann MITORA 149 H1 cover: soft touch padding: foam shell: nylon carbon rails: Aisi Steel length: 250 mm width: 149 mm weight: 230g ± 2

ARCADEX COMP | GRX 610/822 DISC 1X12SP | YTB87



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	AY - CK16 / Graphite - Glossy AZ - Metal Sand / Graphite - Glossy
FRAME	Arcadex Comp Disc Brake Specification: Flat Mount 140/160 Bottom Bracket Standard: PressFit 86.5 X Ø41 Rear Axle: thru12 OLD (Over-Locknut-Dimension): 142 mm Front Derailleur: Non Compatible Rear Derailleur: SRAM UDH Hanger type Max Chaining Compatibility: 38T-44T Minimum Chainline: 45.5 mm Tire Clearance: ETRTO 622-50 mm SeatPost O.D: Ø27.2 mm Material: Epoxy - SM Carbon Fiber Composite
HEADSET	Bianchi Custom Acros ICR (Internal Cable Routing) Spacers: 5 mm x 1, 10 mm x 3 Headtube Cover: Bianchi Custom Compression Ring: 1.125 Inch Top Bearing: Angular contact Bearing 42x52x7 + seal Bottom Bearing: Angular contact Bearing 40x52x7 + seal
FORK	Bianchi Arcadex Fork Disc Brake Specification: Flat Mount 140/160 Front Axle: thru12 OLD (Over-Locknut-Dimension): 100 mm Tire Clearance: ETRTO 622-50 mm Steer tube Diameter: 1 1/8" Material: Epoxy - SM Carbon Fiber Composite
SHIFTER	Shimano GRX 610 ST/BL-RX610
REAR DERAILLEUR	Shimano GRX 822 RD-RX822, SGS Maximum Cassette Sprocket 51T
CRANKSET	Shimano GRX 610 FC-RX610-1, 40T Crank Length: 170 mm-XS(47)-SM(51), 172.5 mm-MD(55)-LG(58), 175 mm-XL(61)
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit
CHAIN	Shimano CN-M7100

CASSETTE / FREEWHEEL	Shimano CS-M7100-12 speed, 11-51T Driver body Interface: MicroSpline
BRAKE	Shimano Hydraulic Brake, BR-RX400
DISC ROTOR	Shimano SM-RT70 IceTech Hub Interface: Centerlock Rotor Diameter: 160 mm (front&Rear)
WHEELSET	Fulcrum RapidRed 900 2-Way Fit Ready (for clincher and tubeless ready) Rim Diameter: 700C Material: Aluminum Alloy Rim Height: 24 mm Inner Width Channel: 22 mm
TIRE	Pirelli Cinturato™ GRAVEL M Classic, 45-622 tan sidewall
STEM	Velomann AICR Alloy Rise: -2° Steerer Diameter: 1-1/8" (28.6 mm) HB interface Diameter: 1-1/4" (31.8 mm) Stem Lengths: 80 mm-XS(47), 90 mm-SM(51), 100 mm-MD(55), 110 mm-LG(58), 120 mm-XL(61)
HANDLEBAR	Velomann Gravel ICR Alloy Flare: 16° Drop: 130 mm Reach 70 mm Interface Diameter: 1 1/4" (31.8 mm) HandleBar Widths: 400- SX(47) SM(51), 420-MD(55) LG(58), 440-XL(61)
TAPE	Bianchi Hexagon tape 2.5 mm thickness, Full black
SEATPOST	Velomann Carbon UD SeatPost O.D: Ø27.2 mm Seatpost lengths: 300 mm-SX(47), 350 mm-SM(51) MD(55), 400 mm-LG(58) XL(61)
SADDLE	Velomann MITORA 149 H2 cover: soft touch padding: foam shell: nylon carbon rails: Steel length: 250 mm width: 149 mm

ARCADEX COMP | GRX 610/822 DISC 1X12SP | YTB87



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	AY - CK16 / Graphite - Glossy AZ - Metal Sand / Graphite - Glossy
FRAME	Arcadex Comp Disc Brake Specification: Flat Mount 140/160 Bottom Bracket Standard: PressFit 86.5 X Ø41 Rear Axle: thru12 OLD (Over-Locknut-Dimension): 142 mm Front Derailleur: Non Compatible Rear Derailleur: SRAM UDH Hanger type Max Chaining Compatibility: 38T-44T Minimum Chainline: 45.5 mm Tire Clearance: ETRTO 622-50 mm SeatPost O.D: Ø27.2 mm Material: Epoxy - SM Carbon Fiber Composite
HEADSET	Bianchi Custom Acros ICR (Internal Cable Routing) Spacers: 5 mm x 1, 10 mm x 3 Headtube Cover: Bianchi Custom Compression Ring: 1.125 Inch Top Bearing: Angular contact Bearing 42x52x7 + seal Bottom Bearing: Angular contact Bearing 40x52x7 + seal
FORK	Bianchi Arcadex Fork Disc Brake Specification: Flat Mount 140/160 Front Axle: thru12 OLD (Over-Locknut-Dimension): 100 mm Tire Clearance: ETRTO 622-50 mm Steer tube Diameter: 1 1/8" Material: Epoxy - SM Carbon Fiber Composite
SHIFTER	Shimano GRX 610 ST/BL-RX610
REAR DERAILLEUR	Shimano GRX 822 RD-RX822, SGS Maximum Cassette Sprocket 51T
CRANKSET	Shimano GRX 610 FC-RX610-1, 40T Crank Length: 170 mm-XS(47)-SM(51), 172.5 mm-MD(55)-LG(58), 175 mm-XL(61)
BOTTOM BRACKET	Shimano SM-BB72-41B, press fit
CHAIN	Shimano CN-M7100

CASSETTE / FREEWHEEL	Shimano CS-M7100-12 speed, 11-51T Driver body Interface: MicroSpline
BRAKE	Shimano Hydraulic Brake, BR-RX400
DISC ROTOR	Shimano SM-RT70 IceTech Hub Interface: Centerlock Rotor Diameter: 160 mm (front&Rear)
WHEELSET	Fulcrum RapidRed 900 2-Way Fit Ready (for clincher and tubeless ready) Rim Diameter: 700C Material: Aluminum Alloy Rim Height: 24 mm Inner Width Channel: 22 mm
TIRE	Pirelli Cinturato™ GRAVEL M Classic, 45-622 tan sidewall
STEM	Velomann AICR Alloy Rise: -2° Steerer Diameter: 1-1/8" (28.6 mm) HB interface Diameter: 1-1/4" (31.8 mm) Stem Lengths: 80 mm-XS(47), 90 mm-SM(51), 100 mm-MD(55), 110 mm-LG(58), 120 mm-XL(61)
HANDLEBAR	Velomann Gravel ICR Alloy Flare: 16° Drop: 130 mm Reach 70 mm Interface Diameter: 1 1/4" (31.8 mm) HandleBar Widths: 400- SX(47) SM(51), 420-MD(55) LG(58), 440-XL(61)
TAPE	Bianchi Hexagon tape 2.5 mm thickness, Full black
SEATPOST	Velomann Carbon UD SeatPost O.D: Ø27.2 mm Seatpost lengths: 300 mm-SX(47), 350 mm-SM(51) MD(55), 400 mm-LG(58) XL(61)
SADDLE	Velomann MITORA 149 H2 cover: soft touch padding: foam shell: nylon carbon rails: Steel length: 250 mm width: 149 mm

ARCADEX AL | GRX 610 12SP | YVBL3



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLORS	U9 - Turquoise - CK16 [Full Glossy] UB - Light Green - Forest Green [Full Glossy] UP - Burgundy - Coral Red [Full Glossy]
FRAME	Bianchi Arcadex AL, aluminium, hydroformed tubes, tire clearance 50 mm, T47 Bottom bracket, rack and fender compatibility sizes XS-SM-MD-LG-XL
SEATPOST CLAMP	Bianchi Aluminium, diameter 31.8 mm
SEATPOST	Velomann Aluminium, 27,2 mm, Seatback 0 mm length: 300 mm (XS); 350 mm (SM-LG); 400 mm (XL)
HEADSET	Acros for internal cable routing
FORK	Bianchi Arcadex, Carbon, flat mount disc brake, thru axle 12x100 mm
STEM	Velomann AL6061, rise -7° Size: 70 mm (XS); 80 mm (SM); 90 mm (MD); 100 mm (LG); 110 mm (XL)
HANDLEBAR	Velomann Gravel, Aluminium, diameter 31.8 mm, reach 70 mm, drop 130 mm, flare 16 deg Size: 400 mm (XS-SM); 420 mm (MD-LG); 440 mm (XL)
GRIP / TAPE	Bianchi Hexagon tape, 2.5 mm thickness, black
SADDLE	Selle Royal SRX Open

WHEELSET	Velomann V22G, Rim: Aluminium, 622x24c, 24h
TIRE	Pirelli Cinturato Tanwall, 700x45
SHIFTER	Shimano GRX, shifter lever ST-RX610, caliper BR-RX400
REAR DERAILLEUR	Shimano GRX, RD-RX822, 12sp
FRONT DERAILLEUR	no_code
CRANKSET	Shimano GRX, FC-RX610, 40T Crank length: 165 mm (XS-SM); 170 mm (MD-LG); 172.5 mm (XL)
BOTTOM BRACKET	Token T47, 24 mm axle, 86.5 mm width
CHAIN	Shimano 105, CN-M7100
CASSETTE / FREEWHEEL	Shimano SLX, CS-M7100, 10-51T, 10-12-14-16-18-21-24-28-33-39-45-51T
BRAKE LEVER	Included in the shifter
BRAKE	Shimano BR-RX410 Hydraulic disc brake
FRONT DISK ROTOR	Shimano RT-CL700 Center Lock, 160 mm
REAR DISK ROTOR	Shimano RT-CL700 Center Lock, 160 mm


VIA NIRONE 7 | GRX610 12SP | YVBMJ



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLORS	GE - Yellow [Matt] - Graphite [Glossy] RL - Celeste [Matt] - Graphite [Glossy]
FRAME	Bianchi Via Nirone 7, Aluminium, Flat mount disc, BSA, Thru axle, OLD: 142 mm, Front derailleur: band type, Internal cable routing sizes 47-50-53-55-57-59-61
SEATPOST CLAMP	Bianchi Aluminium, diameter 31.8 mm
SEATPOST	Velomann Aluminium, Diameter 27,2 mm, 15 mm offset length: 300 mm (47-50 cm); 350 mm (53-61 cm)
HEADSET	Acros for internal cable routing
FORK	Bianchi Full Carbon, 1,5", disc brake flat mount, thru axle 12x100 mm
STEM	Velomann Aluminium, Diameter 28.6 mm, Barbore 31.8 mm, angle 0 Size: 80 mm (47-53 cm); 100 mm (55 cm); 120 mm (57-61 cm)
HANDLEBAR	Velomann Gravel, Aluminium, diameter 31.8 mm, reach 70 mm, drop 130 mm, flare 16 deg Size: 400 mm (47-53 cm); 420 mm (55-59 cm); 440 mm (61 cm)
GRIP / TAPE	Bianchi Hexagon tape, 2.5 mm thickness, black
SADDLE	Selle Italia Gnd Full-fit, Rail in carbon steel

WHEELSET	Velomann 622x21, 32 holes; Front hub: Aluminium, Thru axle; Rear hub: Shimano FH-TC500
TIRE	Pirelli Cinturato Gravel Adventure M, 40-622, Tubeless ready, 60 TPI
SHIFTER	Shimano GRX, shifter lever ST-RX610, caliper BR-RX400
REAR DERAILLEUR	Shimano GRX, RD-RX822, 12sp
FRONT DERAILLEUR	-
CRANKSET	Shimano GRX, FC-RX610, 40T Crank length: 165 mm (47-50 cm); 170 mm (53-55 cm); 172.5 mm (57-59 cm); 175 mm (61 cm)
BOTTOM BRACKET	Shimano BB-RS501, BSA
CHAIN	Shimano 105, CN-M7100
CASSETTE / FREEWHEEL	Shimano SLX, CS-M7100, 10-45T, 10-12-14-16-18-21-24-28-32-36-40-45T
BRAKE LEVER	Included in the shifter
BRAKE	Shimano BR-RX400 Hydraulic disc brake
FRONT DISK ROTOR	Shimano SM-RT10, 160 mm
REAR DISK ROTOR	Shimano SM-RT10, 160 mm

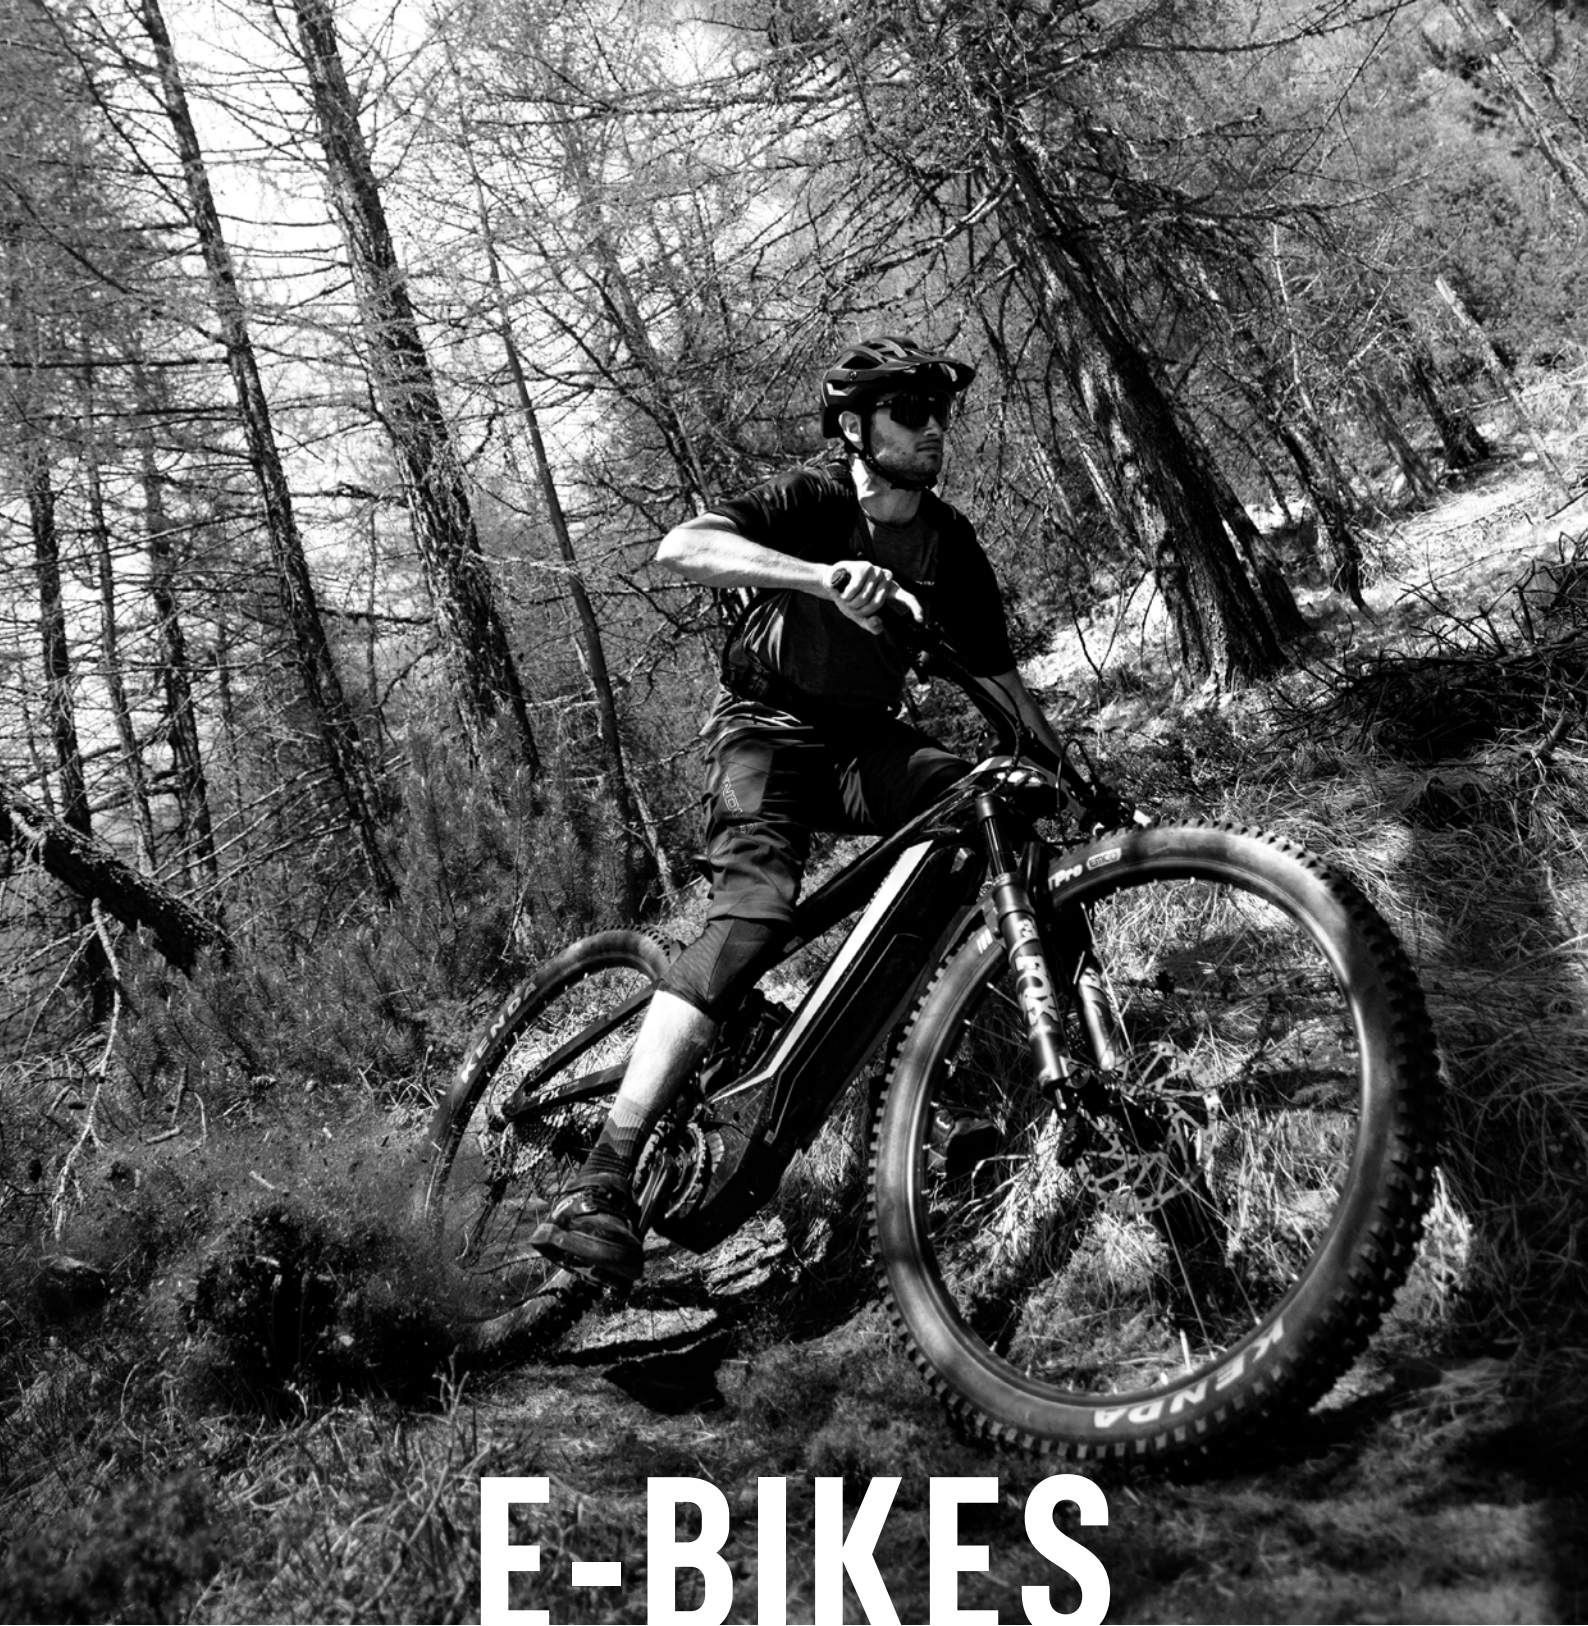

E-BIKES

E - R O A D

E-ROAD

E-OLTRE | ULTEGRA 2 X 12 SP X30 250 | YUBN9



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZQ: Celeste metallic / CK16-Graphite Full Matt
FRAME	Oltre e-road carbon, fully internal cable routing, mechanic and electronic groupsets, BB pressfit, disc brake flat mount, OLD 135mm sizes: 47, 50, 53, 55, 57, 59, 61
SEATPOST CLAMP	included in the frame
HEADSET	Acros / FSA, internal cable routing ICR
FORK	Full carbon aero road ICR, integrated head , disc brake flat mount, thru axle 12x100
SHIFTER	Shimano Ultegra Di2 12 speed
REAR DERAILEUR	Shimano Ultegra Di2 12 speed RD-R8150
FRONT DERAILEUR	Shimano Ultegra Di2 12 speed FD-R8150
CRANKSET	Shimano Ultegra Di2 12 speed, FC-R8100, hollowtech 2, 50x34T Crank Length: 47, 50, 53 - 170mm 55, 57, 59 - 172.5mm 61 - 175mm
BOTTOM BRACKET	Mahle torque sensor BB
CHAIN	Shimano 105 12 speed
CASSETTE / FREEWHEEL	Shimano 105 12 speed, 11-34 11-12-13-14-15-17-19-21-24-27-30-34T

BRAKE	included in the shifter
DISC ROTOR	Shimano RT86 6bolt,160mm rear Shimano MT800, centerlock 160mm front
RIM/WHEELSET	Velomann Plutonium, carbon, 21-622, profile 50mm, 24hole front, 32 hole rear, tubeless ready
TIRE	Vittoria Rubino V 28-622 TLR, G2.0, 100TPI
STEM	Velomann, AL6061, fully internal cable routing stem, compatible with Acros AICR system Ext: 90mm (47), 100mm(50/53), 110mm(55/57), 120mm(59/61)
HANDLEBAR	Velomann Aero Compact handlebar, diam. 31,8mm, reach 74mm, drop 116mm, Size: 400mm-47-53cm, 420mm-55-61cm
GRIP / TAPE	Bianchi Hexagon tape, 2.5mm thickness, black
SEATPOST	Full carbon aero shape, special Clamp type with alloy head adjustable and reversible +/- 35mm; lenghts: 300mm =47> 50cm; 350mm= 53>61
SADDLE	Velomann Gnd Full-fit, carbon steel rail, 262x145
MOTOR UNIT	Mahle X30 Drive unit, 45Nm, 250W iWoc ONE head unit, with e-shifters
BATTERY	Mahle 'iX250w Battery Pack


E-OLTRE | 105 2 X 12 S P X30 250 | YUBN8



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	ZQ: Celeste metallic / CK16-Graphite Full Matt
FRAME	Oltre e-road carbon, fully internal cable routing, mechanic and electronic groupsets, BB pressfit, disc brake flat mount, OLD 135mm sizes: 47, 50, 53, 55, 57, 59, 61
SEATPOST CLAMP	included in the frame
HEADSET	Acros / FSA, internal cable routing ICR
FORK	Full carbon aero road ICR, integrated head , disc brake flat mount, thru axle 12x100
SHIFTER	Shimano 105 12 speed
REAR DERAILLEUR	Shimano 105 12 speed RD-R7100
FRONT DERAILLEUR	Shimano 105 12 speed FD-R7100
CRANKSET	Shimano 105 12 speed, FC-R7100, hollowtech 2, 50x34T Crank Length: 47, 50, 53 - 170mm 55, 57, 59 - 172.5mm 61 - 175mm
BOTTOM BRACKET	Mahle torque sensor BB
CHAIN	Shimano 105 12 speed
CASSETTE / FREEWHEEL	Shimano 105 12 speed, 11-34 11-12-13-14-15-17-19-21-24-27-30-34T

BRAKE	included in the shifter
DISC ROTOR	Shimano RT86 6bolt,160mm rear Shimano MT800, centerlock 160mm front
RIM/WHEELSET	Velomann Plutonium, carbon, 21-622, profile 50mm, 24hole front, 32 hole rear, tubeless ready
TIRE	Vittoria Rubino V 28-622 TLR, G2.0, 100TPI
STEM	Velomann Viper, Alloy 6061, raise - 7°, semi-integrated cable routing Ext:90mm-47cm, 100mm-50-53cm, 110mm-55-57cm, 120mm-59-61cm
HANDLEBAR	Velomann Aero Compact, alloy 6061 diam. 31,8mm, reach 74mm, drop 116mm Size: 400mm-47-53cm,420mm-55-59cm,440mm-61cm
GRIP / TAPE	Bianchi Hexagon tape, 2.5mm thickness, black
SEATPOST	Full carbon aero shape, special Clamp type with alloy head adjustable and reversible +/- 35mm; lenghts: 300mm =47- 50cm; 350mm= 53-61
SADDLE	Velomann Gnd Full-fit, carbon steel rail, 262x145
MOTOR UNIT	Mahle X30 Drive unit, 45Nm, 250W iWoc ONE head unit
BATTERY	Mahle iX250w Battery Pack

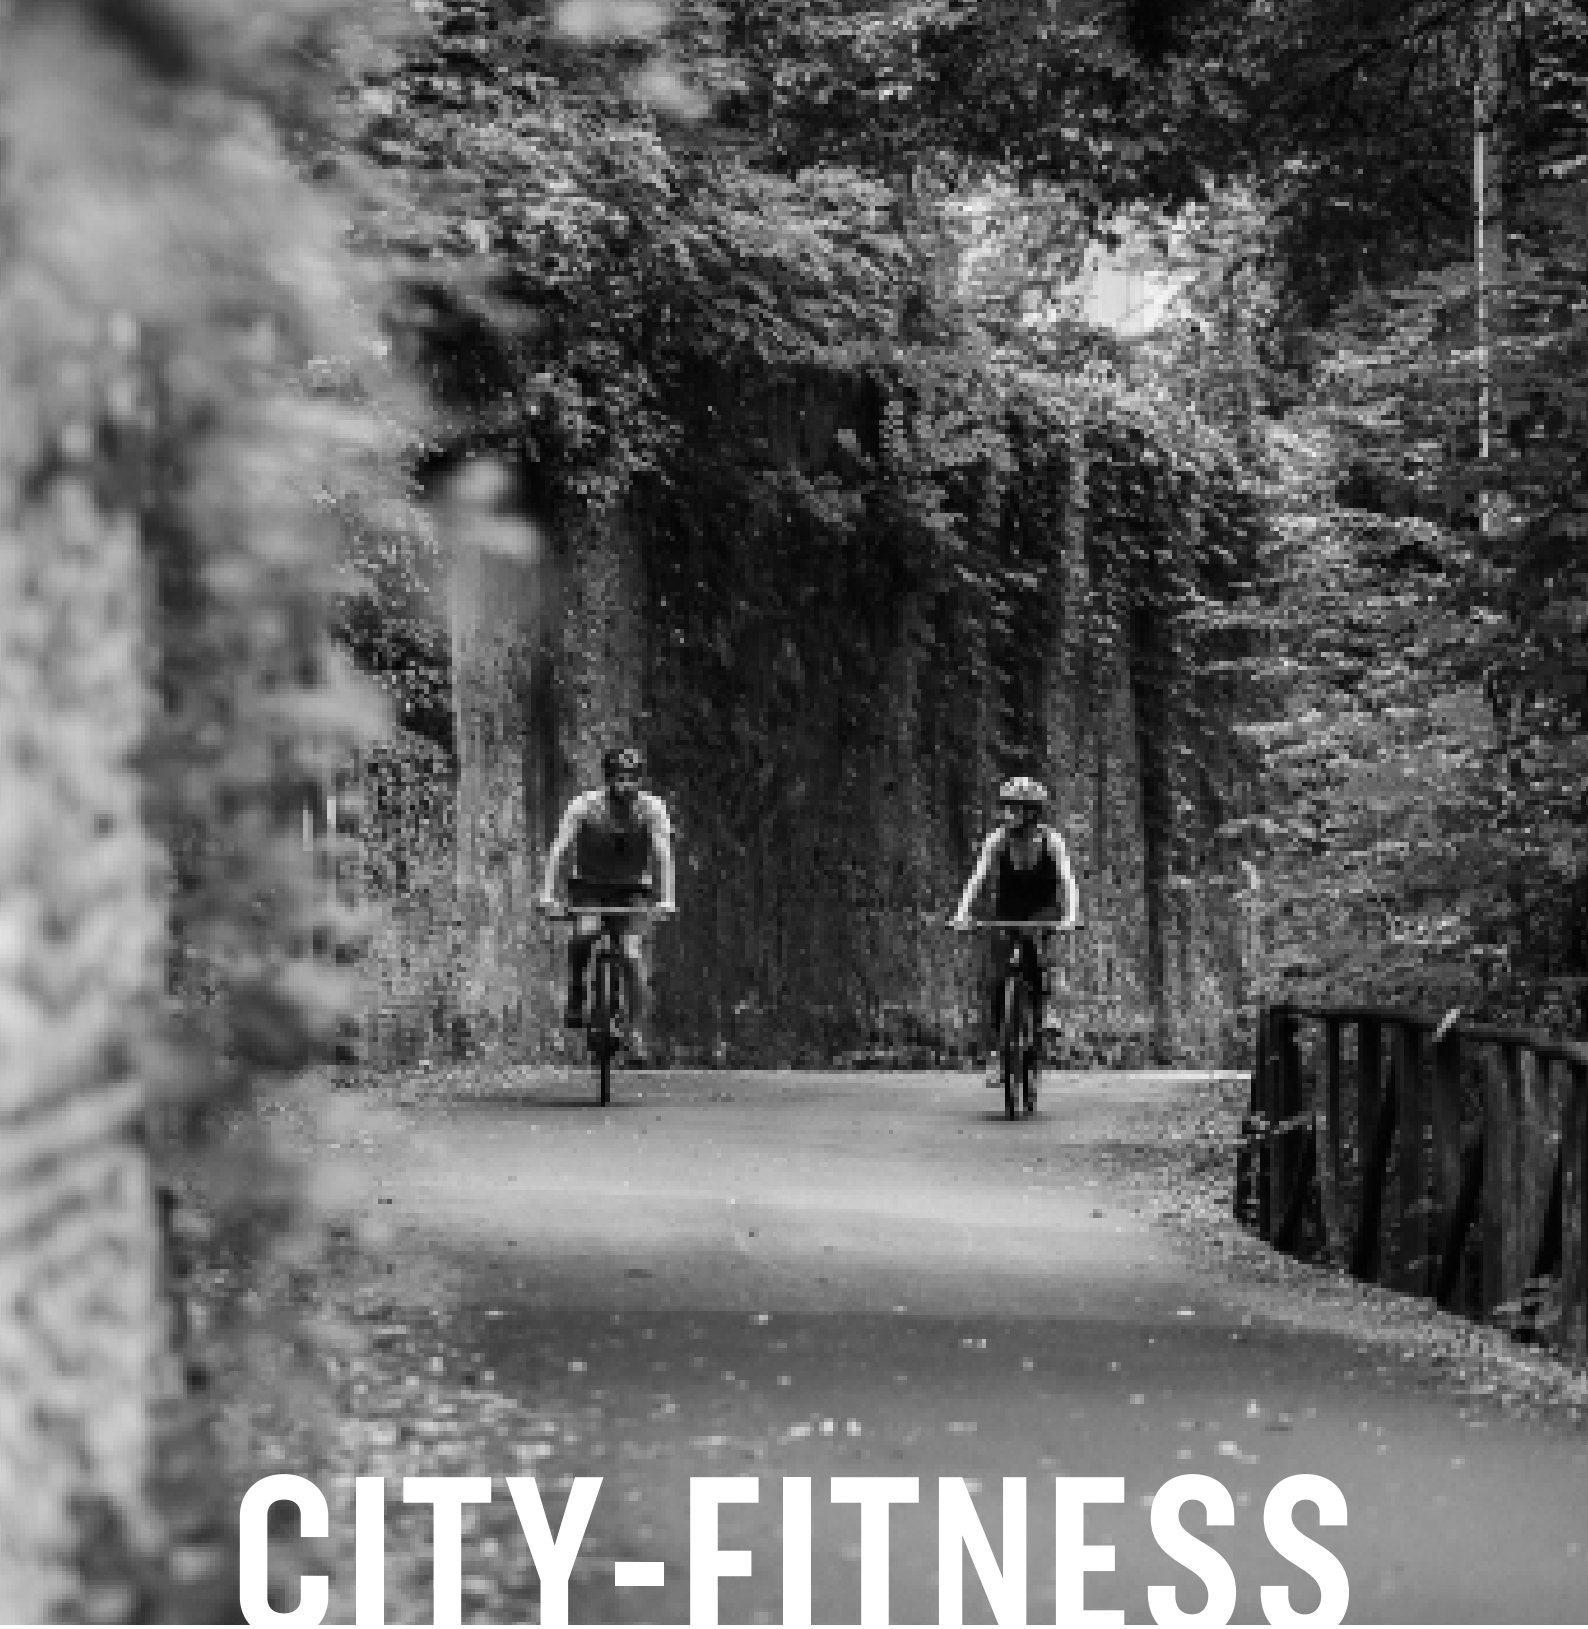

CITY-FITNESS

SPILLO TOURER | CUES 10SP | YTBH3



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLORS	IH - CK16 [Matt] - Graphite [Glossy]
	IK - Grey [Matt] - Graphite [Glossy]
	IL - Graphite [Matt] - Graphite [Glossy]
FRAME	Bianchi Spillo Tourer 28, aluminium, OLD 9x135 QR, post mount sizes SM-MD
FORK	Suntour NEX-HLO 28", 9x100 QR, 63 mm travel
HEADSET	FSA No.8B - ZS-4D
STEM	Velomann UP3+ adjustable 0°-90°, lenght 70 mm
HANDLEBAR	Velomann MTB10A, width: 660 mm, bar bore: 31.8 mm, backsweep: 12°
GRIP / TAPE	Herrmans Oxy 130 mm
SEAT CLAMP	Bianchi Aluminium, diameter 31.8 mm
SEATPOST	Velomann Aluminium, Diameter 27,2 mm, 15 mm offset length: 350 mm
SADDLE	Velomann 2087HRN
WHEELSET	Velomann Aluminium rim, 622x21c, dynamo hub

TIRE	Kenda KWIC JOUR 700x38
SHIFTER	Shimano CUES SL-U6000-10R
REAR DERAILLEUR	Shimano CUES RD-U6020, 10sp
CRANKSET	Shimano FC-U6000, 46x30T Crank length: 170 mm
CHAIN	Shimano CN-LG500, 10sp
CASSETTE / FREEWHEEL	Shimano CS-LG300, 10sp, 11-13-15-17-20-23-26-30-34-39T
BRAKE LEVER	Shimano BL-MT200
BRAKE	Shimano MT-200, 2 pistons, mineral oil
FRONT DISK ROTOR	Shimano SM-RT10, 160 mm
REAR DISK ROTOR	Shimano SM-RT10, 160 mm
PEDALS	SP-877 with reflector
FRONT LIGHT	Buchel UNI LED 15lux, dynamo
REAR LIGHT	Spanninga Dynano rear light
KICKSTAND	Ursus Wave, dropout mount
MUDGUARDS	SKS A46R

SPILLO TOURER STEPTHROUGH | CUES 10SP | YTBH4



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLORS	IH - CK16 [Matt] - Graphite [Glossy]
	IK - Grey [Matt] - Graphite [Glossy]
	IL - Graphite [Matt] - Graphite [Glossy]
FRAME	Bianchi Spillo Tourer 28 Step-thru, aluminium, OLD 9x135 QR, post mount sizes XS
FORK	Suntour NEX-HLO 28", 9x100 QR, 63 mm travel
HEADSET	FSA No.8B - ZS-4D
STEM	Velomann UP3+ adjustable 0°-90°, lenght 70 mm
HANDLEBAR	Velomann MTB10A, width: 660 mm, bar bore: 31.8 mm, backsweep: 12°
GRIP / TAPE	Herrmans Oxy 130 mm
SEAT CLAMP	Bianchi Aluminium, diameter 31.8 mm
SEATPOST	Velomann Aluminium, Diameter 27,2 mm, 15 mm offset length: 350 mm
SADDLE	Velomann 2087HRN
WHEELSET	Velomann Aluminium rim, 622x21c, dynamo hub

TIRE	Kenda KWIC JOUR 700x38
SHIFTER	Shimano CUES SL-U6000-10R
REAR DERAILLEUR	Shimano CUES RD-U6020, 10sp
CRANKSET	Shimano FC-U6000, 46x30T Crank length: 170 mm
CHAIN	Shimano CN-LG500, 10sp
CASSETTE / FREEWHEEL	Shimano CS-LG300, 10sp, 11-13-15-17-20-23-26-30-34-39T
BRAKE LEVER	Shimano BL-MT200
BRAKE	Shimano MT-200, 2 pistons, mineral oil
FRONT DISK ROTOR	Shimano SM-RT10, 160 mm
REAR DISK ROTOR	Shimano SM-RT10, 160 mm
PEDALS	SP-877 with reflector
FRONT LIGHT	Buchel UNI LED 15lux, dynamo
REAR LIGHT	Spanninga Dynano rear light
KICKSTAND	Ursus Wave, dropout mount
MUDGUARDS	SKS A46R

MILANO MID-STEP | ALTUS 2x8SP | YRB94



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	U6: Burgundy UA: Celeste
FRAME	Milano, AL6061 RB, 700c, OLD 135mm, Size: 15-16.5-19" (38cm, 42cm, 50cm)
SEATPOST CLAMP	MX-112C alloy, diam. 31,8mm
HEADSET	Threaded, steel, 1 1/8"
FORK	Bianchi Hi-Ten 700c, 1 1/8"
SHIFTER	Shimano Tourney 2x8sp
REAR DERAILLEUR	Shimano Altus RD-M360-L SGS 8sp
FRONT DERAILLEUR	Shimano Tourney
CRANKSET	Shimano, crank length: 170mm-43/47cm, 175mm-51/55cm
BOTTOM BRACKET	Shimano BB-UN101
CHAIN	KMC Z-72 8sp
CASSETTE / FREEWHEEL	Shimano CS-HG200-8, 12-14-16-18-21-24-28-32T

BRAKE	V-Brake Alloy, cartridge pads
BRAKE LEVER	V-Brake Alloy
FRONT HUB	Formula FM-21
REAR HUB	Formula FM-21
RIM/WHEELSET	AlexRims ACE24 Alloy double wall, 36 holes
TIRE	Kenda 700x35 w/Skinwall
STEM	Alloy, rise 25°, w/180mm quill, diam 25.4mm, Ext: 80mm-15/16.5", 100mm-19"
HANDLEBAR	Steel, diam 25.4mm, width 600mm, rise 50mm, 6° backsweep
GRIP / TAPE	Bianchi Ergonomic Double density, Black/CK
SEATPOST	Alloy, diam 27.2mm, length 300mm
SADDLE	Bianchi, steel rails
PEDALS	Included

MILANO | ALTUS 2X8 | YRB93



The image shown is indicative only. Components and graphic detail may differ from actual model. Bianchi reserves the right to amend specifications and/or prices.

COLOR	UD: Neon Orange Glossy; UT: Silver
FRAME	Milano, AL6061 RB, 700c, OLD 135mm, Size: 47cm, 54cm, 59cm
HEADSET	1 1/8" headset, steel w/alloy top cap
FORK	Bianchi Hi-Ten 700c, 1 1/8"
SHIFTER	Shimano Tourney SL-RS45 3x8sp
REAR DERAILLEUR	SHIMANO ALTUS RD 8SP
FRONT DERAILLEUR	Shimano Tourney
CRANKSET	Shimano 2x
BOTTOM BRACKET	FSA bb7420st, 113mm
CHAIN	KMC Z-72 8sp
CASSETTE / FREEWHEEL	Shimano 8sp, 11-32T

BRAKE	Shimano br-m375
BRAKE LEVER	V-Brake Alloy
FRONT HUB	Formula FM-21
REAR HUB	Formula FM-21
RIM/WHEELSET	AlexRlms ACE24 Alloy double wall, 36 holes
TIRE	Kenda 700x35 w/Skinwall
STEM	Alloy, rise 25°, w/180mm quill, diam 25.4mm, Ext: 80mm-15/16.5, 100mm-19"
HANDLEBAR	Alloy, diam 27.2mm, length 300mm
GRIP / TAPE	Bianchi Ergonomic Double density, Black/CK
SADDLE	Bianchi, steel rails
PEDALS	Included

R I D E B I A N C H I



BIANCHI

BIANCHI USA INC.

21 Lower Ragsdale Drive, Suite B

Monterey, CA 93940

United States of America

info.usa@bianchi.com

BIANCHI.COM